REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.







*Models GBR35-DW , GBR04-DW, GBR06-DW only **Model GBR04-CC only



REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.






T24 JA8 Certified





| Model | Size | Watts | Delivered lumens | CRI | Color °T | Voltage options |
|-----------------------|---------|-------|---------------------|-------------------|-------------------|---|
| GBR35-CC | 3.5" | 12 W | 860 lm | 90 | 2700, 3000, 3500, | 120V TRIAC dimming |
| GBR04-CC | 4" | 15 W | 1240 lm | | 4000, 5000 K | |
| GBR06-CC | 6" | 20 W | 1500 lm | | | or |
| GBR35-DW [†] | 3.5" | 12 W | 825 lm | | 3000 K - 2200 K | V: 120 / 277 / 347V 0-10V dimming (Check for availability |
| GBR04-DW ⁺ | 4" | 15 W | 1210 lm | | | |
| GBR06-DW [†] | 6" | 20 W | 1540 lm | | | |
| GBR35SQ-CC | 3.5" | 12 W | 860 lm | 2700, 3000, 3500, | | |
| GBR35-CC-DUO | 2x 3.5" | 24 W | 1740 lm | | 4000, 5000 K | |
| GBR35-CC-TRIO | 3x 3.5" | 36 W | 3010 lm | | | |

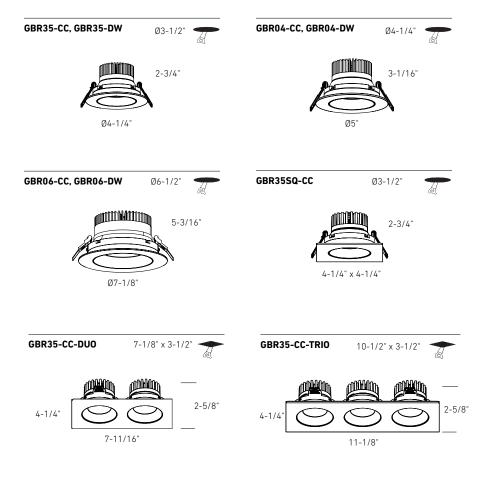

Specifications

Every fixture includes a junction box with an integrated driver

Can be daisy chained

30° tilting, 360° rotation

Switch-selectable CCT (CC models only)

Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light (GBRXX-DW models only)

40° beam angle

30° tilting, 360° rotation

5-year warranty

Finish



) WH White

Accessories

RFP-35 Rough-in plate for GBR35, GBR35SQ

RFP-UNI

Universal rough-in plate forGBR04, GBR06

RFP-46

Rough-in plate for GBR04, GBR06

RFP-DUO

Rough-in plate for GBR35-DUO

RFP-TRIO Rough-in plate for GRB35-TRIO

REC-CC-EXT8FT

8-foot extension cable for GBRXX-CC models

REC-CC-EXT20FT

20-foot extension cable for GBRXX-CC models

REC-3K-EXT8FT

8-foot extension cable for GBRXX-DW models

REC-3K-EXT20FT

20-foot extension cable for GBRXX-DW models

Multi-voltage (V) 🖡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.