

AXIS

A slender form and a soft black finish give this luminaire a contemporary style that fits almost anywhere.

DCP-STKXX



Easy-Select Button

No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).



WET




CHANGE COLORS



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-STK20	20"	6 W	310 lm	80	RGB + 2200 K - 4000 K	24 VDC
DCP-STK50	50"	12 W	565 lm			

DCP-STK20 / DCP-STK50

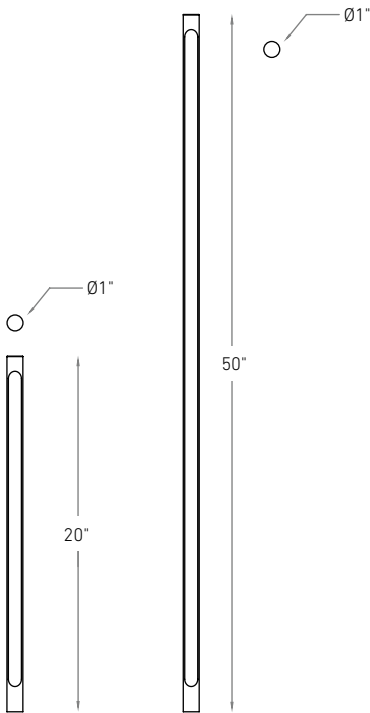

Specifications

Full color spectrum
2200K - 4000K in pure whites
120° beam angle
Dimmable through the DALI Connect app and the Click remote (DCP-RMCT)
5-year warranty

Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output low-voltage smart magnetic transformer

DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output low-voltage smart magnetic transformer

Download the DALI Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

DCP-ACC-MB

Mounting bracket

LCBL-50-16, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring