



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL LNPDSC48-CC-V

NAME Boulevard

48" Pendant linear with aircraft cables

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.




PROJECT

TYPE


DATE

QTY

NOTES

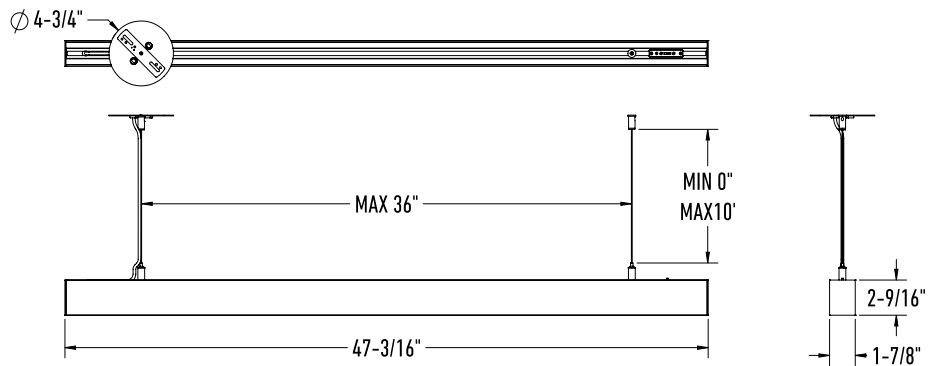

LIGHT DISTRIBUTION

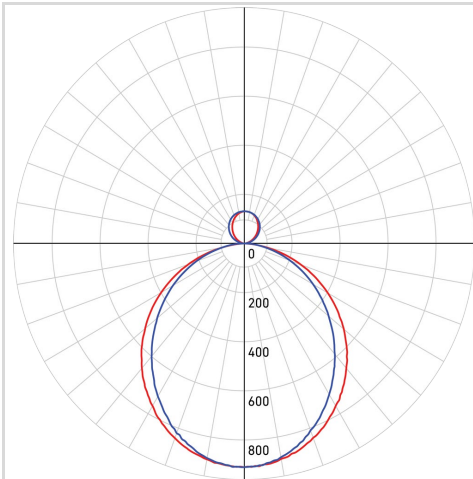

*Lumen output measured at 3000K

QUICK SPECS

Size	48"
Watts (W)	40
Delivered lumens*	2805
CRI	90
Voltage (v)	120/277/347
Beam angle (deg)	106
Mounting	Screwed in
Lifespan (hrs)	50 000
Binning	3 SDCM
LED model	SMD 2835
Light direction	Up and down
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Dry
Location	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP20
Input voltage (V)	120-347
Output voltage (V)	33
Output current (mA)	990
Power factor	99
Driver type	Constant current
THD	≤ 30%
Certifications	ETL, FCC, ICES, T24/JA8

ORDERING GUIDE

LNPDSC48-CC-V

-

Finish

WH - White

BK - Black



CONSTRUCTION

Lens material	PC
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

ACCESSORIES

[LNACC-L16FT](#)

16-foot lens for Boulevard series

ADAPTORS

RECOMMENDED DIMMER LIST*

[illegible]

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.