


NEW

REACH

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.

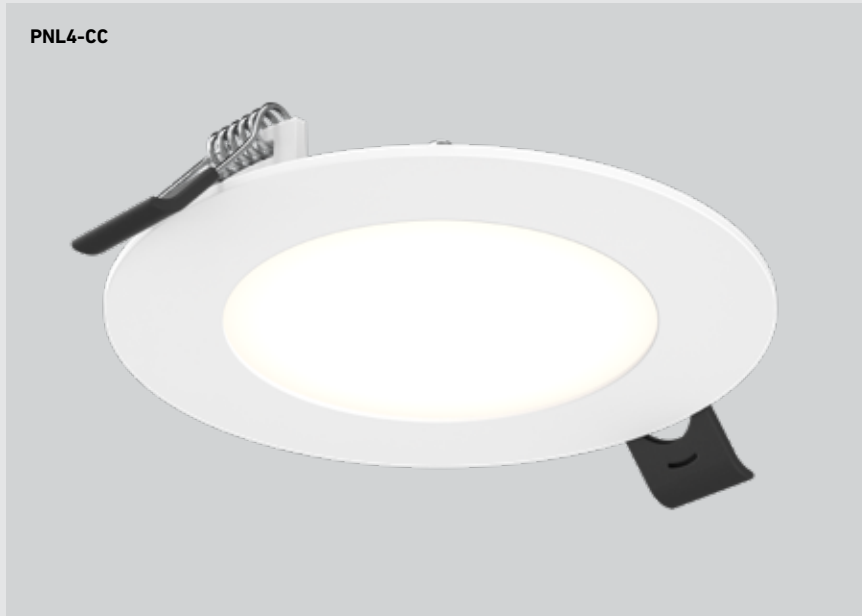

COLOR TEMPERATURE



WET



AIR TIGHT

IC

RATED

T24
JA8

CERTIFIED



COASTAL FRIENDLY*



Intertek



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PNL4-CC	4"	9 W	740 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
PNL4-CC-K12	4"	9 W	740 lm*			
PNL6-CC	6"	12 W	990 lm			
PNL6-CC-K12	6"	12 W	990 lm*			

*Per fixture

*Designed to withstand salty air. 480h salt spray test approved.
Equivalent to 6.5 years in coastal environment.


PNL4-CC

Ø4-1/4"



PNL6-CC

Ø6-1/4"



Specifications

Every fixture includes a junction box with an integrated driver
Can be daisy chained
Superior LED performance and lifespan
Frosted lens
Edge lit technology
Aluminum construction
Designed to withstand salty air
Very low profile
Kits available
5-year warranty

Finish

○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories**RFP-46**

Rough-in plate for PNL4, PNL6

RFP-UNI

Universal rough-in plate for PNL4, PNL6