


MODEL LWB12-CC-V


NAME Brooklyn

12in Square Wall Sconce

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.

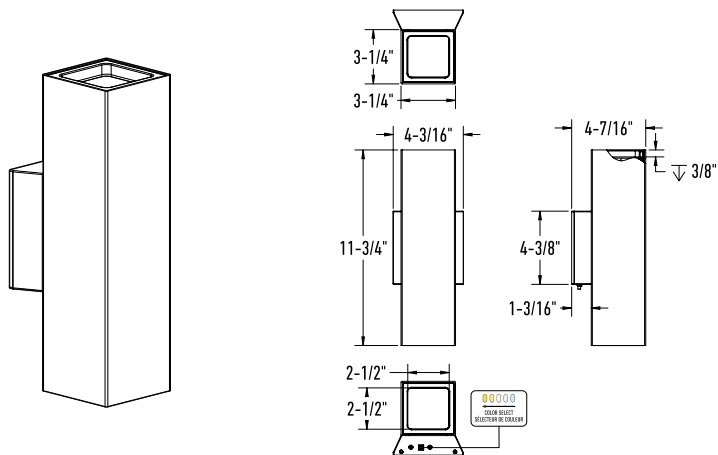

LIGHT DISTRIBUTION

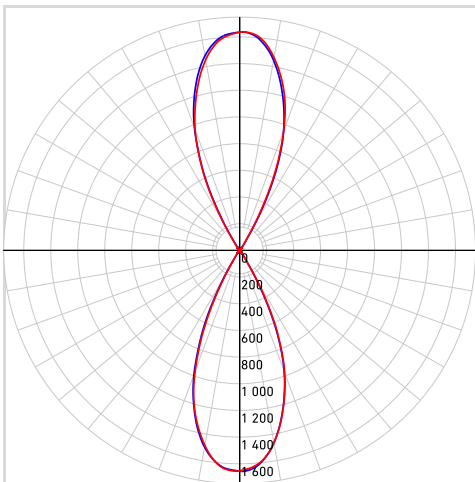

*Lumen output measured at 3000k

QUICK SPECS

Size	12"
Watts (W)	30
Delivered lumens*	1980
CRI	90
Voltage (v)	120/277/347
Beam angle (deg)	115
Mounting	Screwed in
Lifespan (hrs)	50 000
Binning	5 SCDM
LED model	COB
Light direction	up and downlight
Color temperature	2200K/2700K/3000K

ELECTRICAL DETAILS

Environment	Wet
Location	Indoor/Outdoor
Operating temp. (° C)	-30 to 40
IP rating	IP65
Input voltage (V)	120-347
Output voltage (V)	30-40
Output current (mA)	700
Power factor	90
Driver type	Constant current
THD	≤ 20%
Certifications	ETL, FCC, ICES, T24/JA8

ORDERING GUIDE

LEDWALL-B-CC-V

—

Finish

BK - Black



CONSTRUCTION

Lens material	Glass
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

