

DALS LIGHTING

NOTES

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec j7C 4N1 U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL LWB12-CC


NAME Brooklyn

12in Square Wall Sconce


The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.

PROJECT	TYPE	
DATE	QTY	



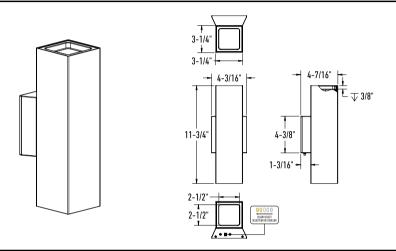

LIGHT DISTRIBUTION



*Lumen output measured at 3000k

QUICK SPECS		ELECTRICAL DETAILS		
Size	12"	Environment	Wet	
Watts (W)	30	Location	Indoor/Outdoor	
Delivered lumens*	1890	Operating temp. (° C)	-30 to 40	
CRI	90	IP rating	IP65	
Voltage (v)	120	Input voltage (V)	120-277	
Beam angle (deg)	115	Output voltage (V)	18-40	
Mounting	Screwed in	Output current (mA)	700	
Lifespan (hrs)	50 000	Power factor	90	
Binning	5 SCDM	Driver type	Constant current	
LED model	COB	THD	≤ 20%	
Light direction	up and downlight	Certifications	ETL, FCC, ICES, T24/JA8	
Color temperature	2200K/2700K/3000K/3500K/	4000K		

ORDERING GUIDE

LEDWALL-B-CC

Finish

BK - Black



CONSTRUCTION

Lens material	Glass
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
LED flush mount fixture		
Mounting bracket		
Mounting hardware		
Wire nuts		
Instruction sheet		

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	DIMMIN MIN	G RANGE %	MAX LOAD
Lutron	DVELV-300P-WH	ELV 300W	Compatible	6	92	11
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	1	100	9
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	Compatible	2	100	9
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	4

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

