


LIGHTING DESIGN GUIDE



2025

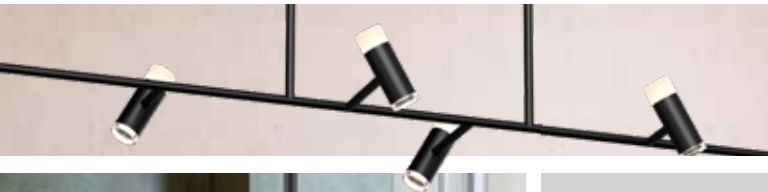

dals



Our mission is to offer the highest level of service and quality through an innovative, functional and complete product line.

DALS Lighting is a manufacturer of designer lighting products with a focus on innovation and emerging technologies. Our systems are showcased in lighting showrooms, retailers, electrical distributors, and e-commerce platforms. Additionally, they are specified in projects across North

America through a robust network of agents collaborating with architects, engineers, contractors, and distributors. We are dedicated to providing exceptional service, fast lead times, environmentally conscious solutions, and superior product quality.







OUR MILESTONES

2008

DALS Lighting Inc. was founded and quickly established itself as a leader in accent lighting by introducing an innovative LED product line.

2009 - 2015

Building on early success, DALs shifted all product lines to LED technology and prioritized best-in-class service. This focus on innovation and quality culminated in the launch of the LED Design Guide in 2015, showcasing cutting-edge products and exclusive LED solutions. DALs also opened its first LED lighting showroom at the Dallas Market Center in Dallas, Texas, solidifying its position in the North American market.

2016

To support continued growth, DALs moved into a new headquarters in Blainville, Quebec, Canada, and expanded its U.S. operations in Coral Springs, Florida.

2017-2022

DALS entered the smart home market with the launch of its smart home ecosystem, featuring connected products controlled through the DALs mobile app. A dedicated team was established to drive innovation in this category. During this period, DALs accelerated its product launch cadence, introduced the DALs Connect and DALs Connect PRO smart platforms, and expanded into landscape lighting. In 2020, the company unveiled a new atrium showroom at the Dallas Market Center, which contributed to substantial growth.

2023

DALS doubled the size of its headquarters and main warehouse, underscoring its commitment to operational excellence and scalability. This expansion was paired with a strategic financial partnership, positioning the company for its next phase of accelerated development.

2024

DALS achieved several significant milestones in 2024. The company delivered its largest-ever product launch, introduced an expanded range of offerings, and began exhibiting at LEDucation, further establishing its presence in the lighting industry. The team continued to grow, reinforcing DALs's dedication to operational excellence and innovation.

2025

Heading into 2025, DALs is excited to introduce new products featuring innovative designs and enhanced technical features. The company remains committed to continuously improving its offerings while thoughtfully exploring strategic opportunities to strengthen its market position. With a focus on team development and operational excellence, DALs is dedicated to delivering exceptional service and value to its customers.

Symbols provide a quick visual reference for key product features, compliance standards, and performance attributes. Strategically integrated into product descriptions throughout the catalog, their meanings are detailed in the accompanying legend for accurate interpretation. These symbols are designed to help you make informed decisions with confidence.

NEW

New Product

This symbol indicates a new product launching this year. Look through the catalog to discover these exciting additions and find detailed specifications for each.



Low-Glare

The recessed positioning of the LED module in this series of downlights effectively minimizes glare, providing a more comfortable lighting experience.



Air tight

Air tight fixtures, tested to meet ASTM E283-04 standards, are designed to prevent air leakage through ceiling holes, improving energy efficiency and maintaining consistent indoor temperatures.



Multi-Voltage

This symbol indicates that a product family offers multi-voltage drivers (120V/277V/347V) that are compatible with 0-10V dimming systems.

UPGRADE

Product Upgrade

This symbol signifies that an existing product has been extensively enhanced to improve its features or performance.



Change Colors

The RGB+CCT color-changing light allows you to choose your favorite color to create different atmospheres or use it for general illumination, with a range from warm to cool white.

T24
JA8

Title 24/JA8

This certification ensures that the lighting control system meets the requirements of California's Title 24 energy code, specifically the JA8 section, which focuses on high-efficacy lighting. It ensures that the system is designed, installed, and programmed correctly for compliance with energy efficiency standards.



Fire Rated

Fire-rated recessed lights feature fire-resistant housings and seals designed to prevent the spread of fire through ceiling or wall openings, ensuring safety and compliance with building codes.



CCT Switch

These lights allow you to adjust the color temperature, offering a range from warm white to cool white within a single fixture.



Dry Location

Dry-rated lights are not designed to protect against condensation and should not come into contact with water. However, these fixtures can withstand brief exposure to moisture, provided there is proper ventilation.



IC Rated

"IC" stands for Insulation Contact. The IC rating indicates whether a recessed downlight is safe to come into contact with your home's insulation.



Multi-Wattage

A multi-wattage light fixture is designed to offer adjustable brightness levels by incorporating varying wattages within the fixture, providing flexibility to meet different lighting needs.



Damp Rated

Damp-rated lights are designed for areas with occasional moisture exposure, but not for locations with constant or direct water contact. For example, these fixtures can be used to illuminate areas directly outside your shower.



Wet Rated

Wet-rated lighting fixtures are designed for areas with direct exposure to water, though they cannot be submerged. These fixtures use waterproof seals to protect their internal components from moisture.



ADA Compliant

The ADA sets standards for light fixture installations in public buildings. To be ADA compliant, fixtures must not extend more than 4 inches into hallways, walkways, or corridors, helping to prevent hazards for individuals with disabilities.



Bluetooth Compatible

This smart light is Bluetooth-compatible and can be seamlessly integrated into your DALI Connect ecosystem for enhanced control and functionality.



Motion Sensor

This symbol indicates that the light fixture features responsive technology, detecting movement nearby and automatically activating the light for improved efficiency and convenience.



Coastal Friendly

These fixtures resist rust, corrosion, fading, and wear from salt air, extreme temperatures, and UV exposure. Approved for 480h salt spray testing, they offer durability equivalent to 6.5 years in coastal conditions.



Gravity Glide


The Gravity Glide height adjustment feature allows you to easily raise or lower a pendant lamp by simply pulling or pushing the cord.



Dark Sky Friendly

Dark sky friendly fixtures are designed to minimize light pollution by directing light downward, helping to preserve the natural night sky.





24

INSTALLATION GUIDE



28

MODA RC-03/04/06-CC



32

FACET RGM2/4/6-CC



34

RGR RGR1/2/4/6-CC RGR2/4-HP RGR4/6SQ-CC



38

NOTCH DRR2/4/6-CC



40

ETCH DDP4-CC DDP6-CC




42

INDIRECT IND4/6




44

PINPOINT SERIES MSL1/2/4/5/10/5G/10G



48

HILUX HPD4/6/8-CC




50

BOULEVARD LNR24/48-CC



52

APERTURE MFD03-CC




54

HORUS GSP3-CC




56

REVOLVE GBR35/04/06-CC GBR35/04/06-DW GBR35SQ-CC GBR35-CC-DUO GBR35-CC-TRIO



60

PIVOT FGM4-3K FGM2/3/4/6 FGM4/6 SQ-CC FGM4-CC-DUO FGM4-CC-TRIO



64

SCOPE LEDDOWNG3 GMB2/4




66

FUSION GPN4-CC GPN6-CC



68

MYSTIQUE SPN4-CC SPN6-CC



70

EXCEL 5003/4/5/6-CC 5004SQ-CC




72

ACCESS 2003/2004/2006



74

ALTER SERIES RTJB4-3K RTJB3/4-CC



76


ALTER SERIES LEDPNLRTF56-CC



78


ACCESSORIES

12 V




86

INSTALLATION GUIDE




88

COB-TAPE
COBTP3M/ COBTP5M/
COBTP-REEL




90

SWIVLED12
SWIVLED12-CC



91

SUPER-PUCK
RECESSED
4001-CC



92

DUO-PUCK
4005-CC
K4005-CC

93: A small, cylindrical LED module." data-bbox="66 200 230 314"/>

93

MINI-PUCK
LED RDM1

94: A circular LED module with a yellow light source." data-bbox="258 200 425 314"/>

94

ECO-PUCK
LED RDP18

95: A rectangular LED module with a sliding cover." data-bbox="453 200 620 314"/>

95

SLIDE
DD1260

24 V

96: A long, thin LED strip with yellow and orange segments." data-bbox="66 391 230 504"/>

96

COB-TAPE
COBTP24V-K10FT-CC
COBTP24V-K20FT-CC
COBTP24V-R50FT-CC
COBTP24V-R100FT-CC

120 V

98: A circular LED module with a black cover." data-bbox="66 623 230 737"/>

98

POWERLED PUCK
6001-CC

99: A long, thin LED strip with a black cover." data-bbox="258 623 425 737"/>

99

POWERLED LINEAR
6009CC/ 6012CC/
6024CC/ 6036CC/
6048CC

100: A long, thin LED strip with a black cover." data-bbox="453 623 620 737"/>

100

PROLED LINEAR
HLF09/ HLF12/ HLF18/
HLF24/ HLF30

102: A long, thin LED strip with a black cover." data-bbox="647 623 814 737"/>

102

COUNTERLED LINEAR
9009CC/ 9012CC/
9018CC /9024CC/
9030CC

GENERAL

104: A rectangular LED module with a cable." data-bbox="66 838 230 952"/>

104


LED DIMMABLE DRIVERS

106: A long, thin LED strip with a cable." data-bbox="258 838 425 952"/>

106

ACCESSORIES





118
NAPA
NAPF20-CC



120
IRIS
IRPD-CC



122
QUARTET
CAPD72-CC



124
BOULEVARD PENDANT
LNPD48-CC
LNPDSC48-CC



126
PINPOINT
MSLPD48-CC



128
BEAM
SPD48-CC
SPD72-CC




132
CURRENT
SLPD60-CC



134
SWAY ONE
W1PD48-CC



134
SWAY THREE
W3PD36-CC



136
SPIN
BRPD40-CC



136
SPIN
BRPD18-CC



138
OLYMPIA FIVE
RRPD5-CC



138
OLYMPIA TWO
RRPD2-CC



140
HELIX
SPR20-CC
SPR34-CC



142
TWIST
TWPS-3K



144
TWIRL
TWPD-CC



146
ATOM PENDANT
FPD60-CC




146
ATOM ONE
FPD-CC




146
ATOM THREE
FPDC3-CC



148
CIRCA
RGPD24-CC



150
ECLIPSE
PDR14-CC



152
PYRA
TRPD34-CC



154
DROP
CFPD20-CC



158
ASTERISK
SSPD32-CC



160
STELLAR PENDANT
STRPD-3K



164
NOVA
PDC18-CC



166
CHANNEL PENDANT
PDLED120-
24/36 /48/60
5/5SQ/8/8SQ



124
**BOULEVARD FLUSH
MOUNT**
LNF48-CC



168
FOCUS
CYL05-CC
CYL06-CC-V




118
NAPA
NAPF20-CC



146
ATOM
FDB-CC



158
ASTERISK FLUSH MOUNT
SSF20-CC



160
STELLAR FLUSH MOUNT
STRFM-3K



134
SWAY FLUSH MOUNT
W3FM-CC



170
HOVER
CCFM-CC



172
NEWTON
FMT18-CC



152
PYRA FLUSH MOUNT
TRFM22-CC



174
MISTY
FUZ11-CC



176
AURORA
CFH12-CC



178
ORA
CFG13-C



180
FUSION
TLFM12-CC
TLFM21-CC



182
DELTA
CFLEDR 6/10/14/18/24-CC
CFLED SQ6/10/14-CC



186
RADIANCE
FMM09-CC
FMM12-CC




188
PRIME
FMP05-CC
FMP05M-CC
FMP09/12-CC




190
SHIFT
VA032-CC
VA024-CC




192
LEDGE
VAL24-CC
VAL36-CC



194
BALANCE
VCC24-CC
VCC36-CC



136
SPIN SCONCE
BRV24-CC
BRV36-CC



196
LIGHTNING
VDL40-CC



198
ARIA
VSW24-CC
VSW36-CC



200
NOBLE ONE
LEDVAN001-CC-18
LEDVAN001-CC-24




202
NOBLE TWO
LEDVAN002-CC-24
LEDVAN002-CC-36




204
LYRA
LEDVAN003-CC-24
LEDVAN003-CC-32




206
PORTRAIT
VLG24-CC
VLG36-CC



160
STELLAR
STK21-CC
STK37-CC



208
GEMINI
SWS24-CC
SWS36-CC
SWS48-CC
SWS60-CC



210
MIDNIGHT
RWS24-CC
RWS48-CC
RWS60-CC



214
PROFILE
LWJ08-CC
LWJ16-CC
LWJ24-CC



126
PINPOINT WALL
MSLWALL-CC



216

ADEN
LEDWALL-A



218

BROOKLYN
LEDWALL-B



220

EDINBURGH
LEDWALL-E



222

SHIELD
DSWC05-CC
DSWC07-CC-V



224

GENEVA
LEDWALL-G-CC



226

HARLOW
LEDWALL-H



228

ALTO
SQS06/10/15



230

CUBIX
LEDWALL001D



232

RISE
LSTP12-CC




228

ALTO STEP LIGHT
SQSTP-CC



234

ECHO
LEDSTEP002D-CC



236

PEARL
LEDSTEP004D-CC



238

CAMBER
LEDSTEP005D-CC



240

ASCEND
LSTP07-CC




250

GLAM
RTL-3C



160

STELLAR FLOOR
STRFL-3K




242

ACCESSORIES



12 V




247

CONNECTION
GUIDE




250

GLAM
RTL-3C




252

SLIM SPOT
LSS10-CC



254

SPOT
LSP3-CCL
LSP4-CCL




256

SOL
GRD2-CC



258

EDGE
LSQP-CC



260

FLUX
LPP20-CC



262

COLUMN
LRB20-CC
LRB30-CC



264

CONTOUR
LHS07-CC



266

TRANSFORMERS
LTRP-60
LTR-300


120 V



268

STATURE
LEDPATH004D


GENERAL



296

ACCESSORIES





272
**SMART CONNECTION
GUIDE**




276
CORE
DCP-TR60, DCP-TR200,
DCP-TR300



278
ORBIT
DCP-SPT6



280
GAÏA
DCP-CPL24



282
AXIS
DCP-STK20
DCP-STK50



284
ACUTE
DCP-45HP20




286
HORIZON
DCP-FLD30




288
MASON
DCP-BRK12




290
FLEX
DCP-NFTAP5M



292
ORION
DCP-STG48




294
KAYU
DCP-RK10
DCP-RK18




297
ACCESSORIES

24 V



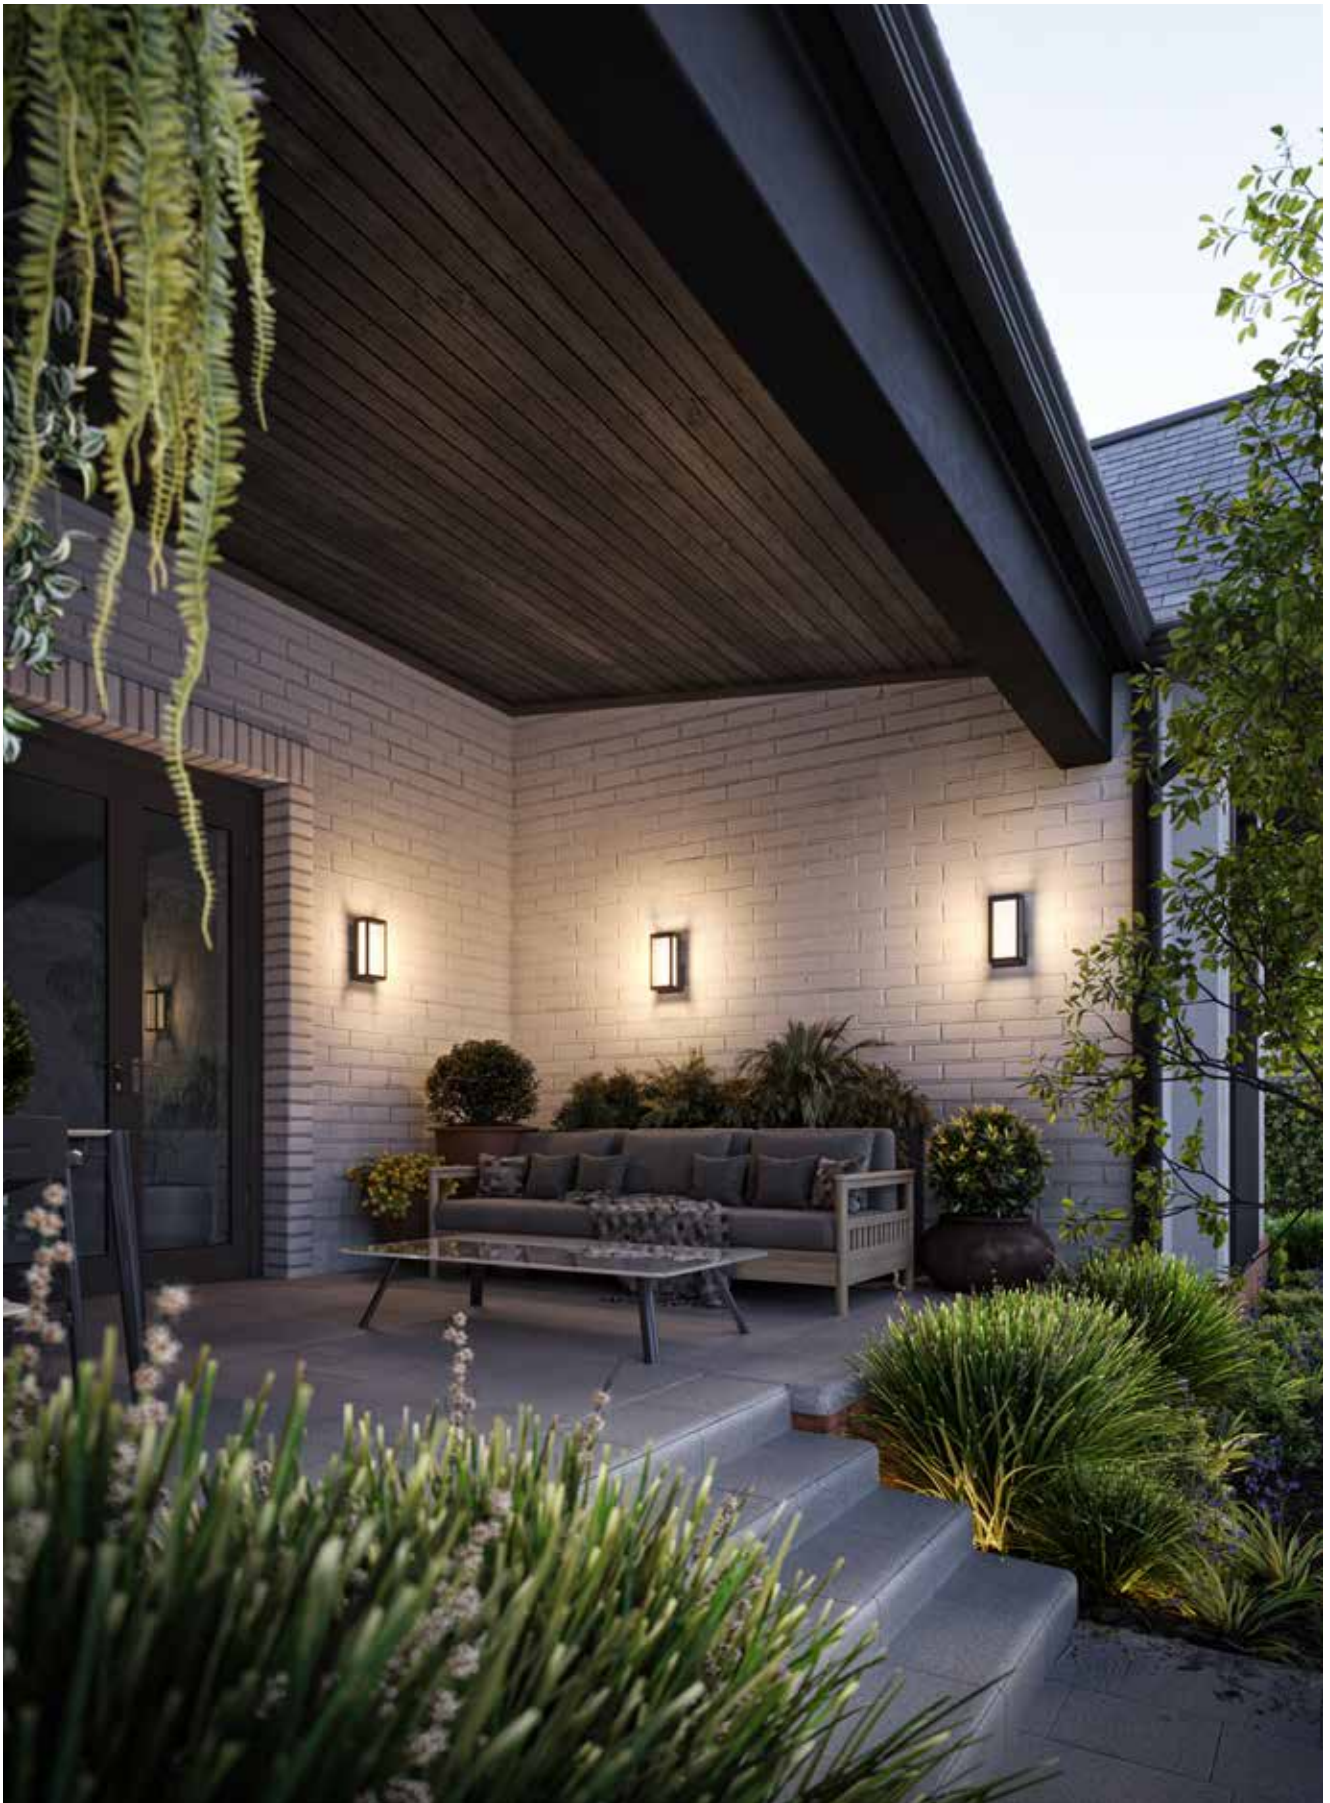




301

CONNECTION
GUIDE




304

PRO HUB
DCP-HUB




306

PIVOT PRO
DCP-FGM4



308

REVOLVE PRO
DCP-GBR35




310

ETCH PRO
DCP-DDP4
DCP-DDP6



312

EXCEL PRO
DCP-PNL4
DCP-PNL6



314

BOULEVARD PRO
DCP-LNR24
DCP-LNR48




316

BOULEVARD
PENDANT PRO
DCP-LNPD48



318

FRAME
DCP-CGWS



320

ARCHITECT
DCP-LWS19




322

GLOW
DCP-TAPXXFT




324

AXIS PRO
SM-STTL20
SM-STFL50



326

A21 PRO
DCP-BLBA21



328

BR30 PRO
DCP-BLBBR30



330

CLICC
DCP-RMCT



332


SMART DIMMER
SWITCH
SM-DIMSW





RECESSED





24

**INSTALLATION
GUIDE**



28

MODA
RC-03/04/06-CC



32

FACET
RGM2/4/6-CC



34

RGR
RGR1/2/4/6-CC
RGR2/4-HP
RGR4/6SQ-CC



38

NOTCH
DRR2/4/6-CC



40

ETCH
DDP4-CC
DDP6-CC



42

INDIRECT
IND4/6



44

PINPOINT SERIES
MSL1/2/4/5/10/5G/10G



48

HILUX
HPD4/6/8-CC



50

BOULEVARD
LNR24/48-CC



52

APERTURE
MFD03-CC



54

HORUS
GSP3-CC



56

REVOLVE
GBR35/04/06-CC
GBR35/04/06-DW
GBR35SQ-CC
GBR35-CC-DUO
GBR35-CC-TRIO



60

PIVOT
FGM4-3K
FGM2/3/4/6
FGM4/6 SQ-CC
FGM4-CC-DUO
FGM4-CC-TRIO



64

SCOPE
LEDDOWNG3
GMB2/4



66

FUSION
GPN4-CC
GPN6-CC



68

MYSTIQUE
SPN4-CC
SPN6-CC



70

EXCEL
5003/4/5/6-CC
5004SQ-CC



72

ACCESS
2003/2004/2006



74

ALTER SERIES
RTJB4-3K
RTJB3/4-CC



76

ALTER SERIES
LEDPNLRTF56-CC



78


ACCESSORIES



Proper Sizing, Spacing and Downlighting Techniques

The components

Our recessed kits include two main components: the driver and the fixture.

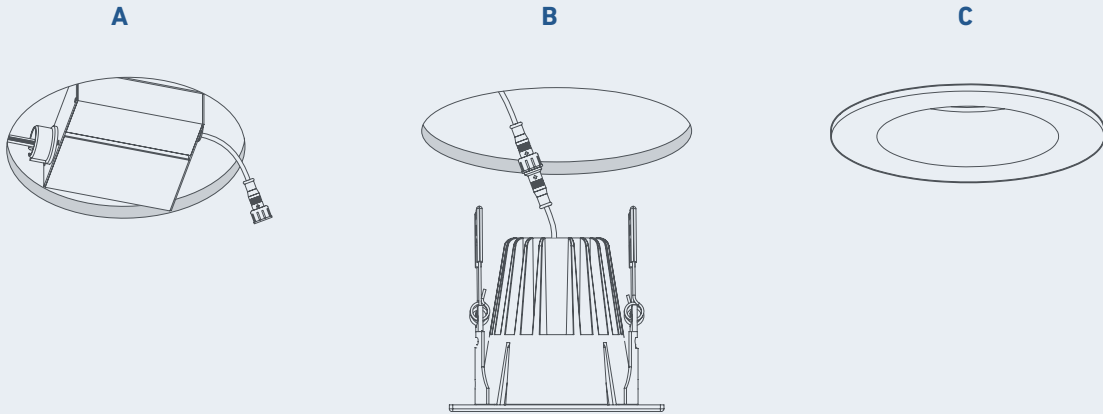

The driver (A)

is what is recessed into the ceiling and consists of the electrical parts that bring power to the light.

The fixture (B & C)

is what's visible to people in the room and gives the light its aesthetic.

**GOOD
TO KNOW!**

Fixtures and drivers are sized to correlate with one another and are sold together with all of our recessed lights.

Panels, spotlights, downlights—whatever you call them, recessed lights are among the most versatile lighting options available. The most common use of recessed lighting, and what we'll focus on here, is recessed downlighting from the ceiling.




Most of our recessed fixtures are available with either a 120V driver or an optional multi-voltage driver (120V / 277V / 347V), ensuring compatibility with various electrical setups. They support 0-10V dimming, enabling seamless lighting control in different settings. Look for this symbol throughout the catalog to easily identify these versatile fixtures.

Installation type

What fixture you choose starts with knowing whether it will be used in a new construction, a remodel or as a retrofit.

D

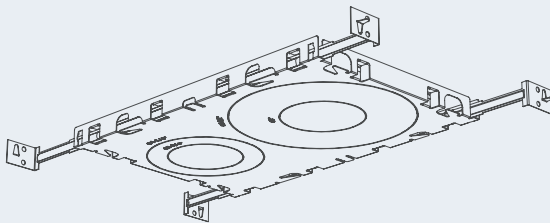


New construction

Locations with visible ceiling joists and without drywall. Lights can be used with our rough-in plates (**D**) to help in the installation process.

Remodels

When the joists are not exposed or if you want to upgrade your current system to LED.

E

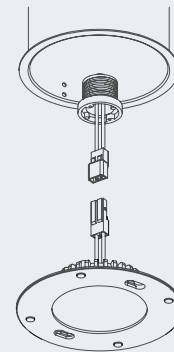

Retrofit

When an existing bulb is removed from the original housing, and replaced with an LED trim (**E**).


**GOOD
TO KNOW!**

Most of Dals' recessed fixtures are designed for new construction and remodels. These fixtures are installed through a small opening in the ceiling and held in place with clips.

**GOOD
TO KNOW!**

A rough-in plate is designed for new construction or renovations where the ceiling framing is exposed. It allows for proper placement of your recessed light and is made from sturdy galvanized steel.

How many downlights do I need?

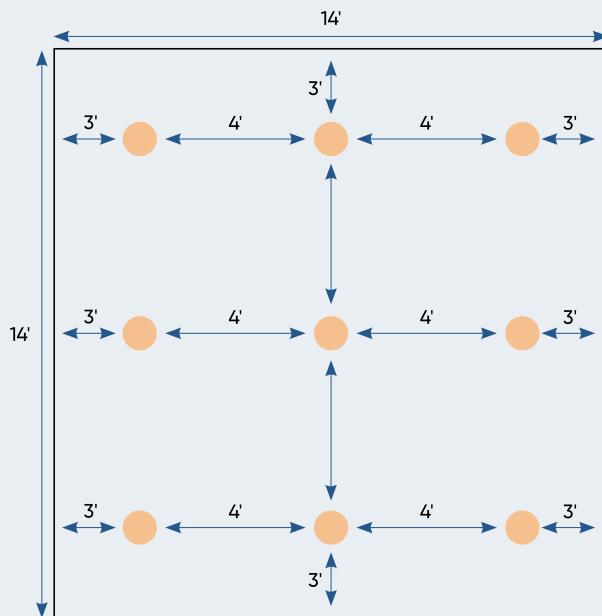

A simple method for estimating the number of downlights required is as follows:

Recessed downlights are generally positioned 2 to 3 feet away from walls with a space of 3 to 4 feet between each light.

Dividing the ceiling height by two is a way of gauging how much space to leave between each downlight.

Thus, if your ceiling is 8 foot high, place your lights 4 feet apart.



In Canada, 4" recessed lights are the most popular, in the U.S., 6" are most commonly used.



MODA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.

RC04-CC



LIGHT ENGINE

Includes an LED module, a heatsink for efficient cooling, a lens holder for light distribution, and a rotating dial at the top to select the color temperature.

REFLECTOR

Sits inside the trim, with options for sloped or regular ceiling positioning. Available in four finishes: Alzak, black, gold, and white.



DRIVER

Converts mains voltage (120V/277V/347V) to the appropriate current for the LEDs, featuring multiple dimming capabilities, including Triac and 0-10V dimming, for added flexibility..

LENS

Sits below the light engine and shapes the light to create the desired beam angle. Available in 20°, 35°, and 60° angles.

TRIM

The visible part framing the light opening. Flanged trim has a visible edge (available in black, gold, and white), while trimless blends seamlessly with the ceiling.

NEW



COLOR TEMPERATURE



MULTI-WATTAGE



WET



LOW-GLARE



CUSTOMIZE



IC RATED




T24 JA8 CERTIFIED




RC03-CC



RC04-CC

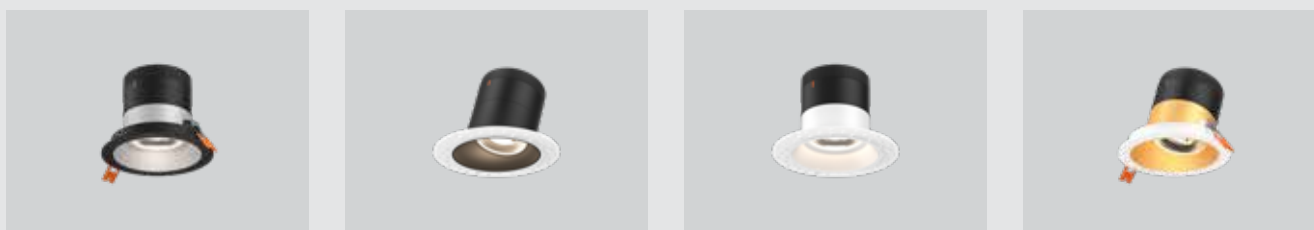

RC06-CC

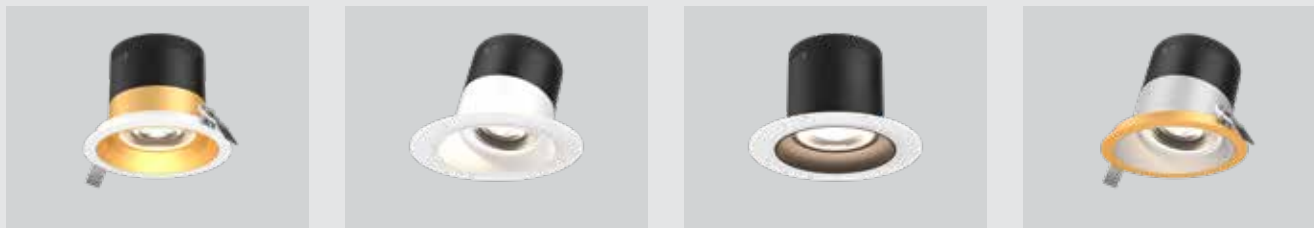


ORDERING GUIDE

Prefix	Light module	Beam angle	Reflector type	Reflector finish	Trim style
RC	03-CC 3" module/1000lm	20 20° narrow beam	RG Regular ceiling	AZ Alzac	TL Round trimless
	04-CC 4" module/2000lm	35 35° medium beam	SL Sloped ceiling	BK Black	TBK Round black trim
	06-CC 6" module/3000lm	60 60° wide beam		GD Gold	TGD Round gold trim
				WH White	TWH Round white trim

RC	04-CC	-	20	-	RG	BK	-	TBK
-----------	--------------	---	-----------	---	-----------	-----------	---	------------


RC04-CC-20-RGBK-TBK



NEW

MODA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.



COLOR TEMPERATURE



MULTI-WATTAGE



WET



LOW-GLARE







CUSTOMIZE

IC
RATEDT24
JA8
CERTIFIED


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage ⚡
RC03-CC	3"	8/10/12 W	1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 / 277 / 347V Triac and 0-10V dimming
RC04-CC	4"	16/20/24 W	2200 lm			
RC06-CC	6"	24/30/36 W	3000 lm			

RC03-CC

Ø3-1/2" 





RC04-CC

Ø4-1/4" 



RC06-CC

Ø6" 



Specifications

Every fixture includes a junction box with integrated dimmable driver
Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the jbox
Can be daisy chained
Aluminum construction
Rotary dial CCT switch
20°, 35°, or 60° beam angles
5-year warranty

Accessories


RFP-35
Rough-in plate for 3" model
RFP-46
Rough-in plate for 4" models
RFP-RC06
Rough-in plate for 6" models
REC-CC-EXT8FT
8-foot extension cable
REC-CC-EXT20FT
20-foot extension cable

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

FACET

This versatile modern thin-trim 2, 4 and 6-inch gimbal with multi-directional adjustable swivel produces a bright glow with minimal glare as a result of its regressed light source. Ideal for general lighting or for areas requiring a directional light to showcase unique elements or to create dramatic wall-wash effects.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
RGM2-CC	2"	8 W	660 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
RGM4-CC	4"	12 W	1200 lm			
RGM6-CC	6"	20 W	1500 lm			or V: 120 / 277 / 347V 0-10V dimming (Check for availability)

*Model RGM4-CC only

RGM2-CC

Ø2-3/4"




3"

Ø3-1/8"

RGM4-CC

Ø4-1/4"




3-1/2"

Ø4-1/2"

RGM6-CC

Ø6-1/2"



3-1/2"

Ø6-3/4"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained

Aluminum construction

Switch-selectable CCT

40° beam angle

30° tilting, 360° rotation

5-year warranty

Finish

● **BK** Black

○ **WH** White

Accessories**RFP-UNI**

Universal rough-in plate

RFP-23

Rough-in plate for 2" model

RFP-46

Rough-in plate for 4" and 6" models

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.

RGR6-CC



RGR1-CC



RGR2-CC



RGR4-CC





COLOR TEMPERATURE



WET



LOW-GLARE



AIR TIGHT



RATED



RGR6SQ-CC



RGR2SQ-CC




RGR4SQ-CC










RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
RGR1-CC	1"	6 W	450 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
RGR2-CC	2"	8 W	600 lm			
RGR2HP-CC	2"	15 W	1080 lm			or
RGR2SQ-CC	2"	8 W	600 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)
RGR4-CC	4"	14 W	1100 lm			
RGR4HP-CC	4"	20 W	1560 lm			
RGR4SQ-CC	4"	15 W	1100 lm			
RGR6-CC	6"	20 W	1600 lm			
RGR6SQ-CC	6"	20 W	1600 lm			

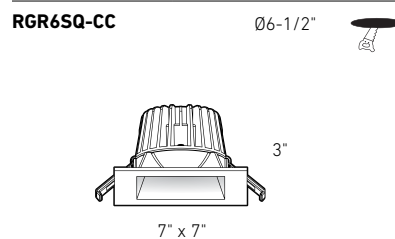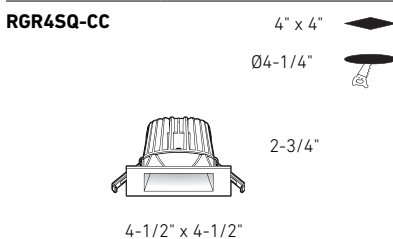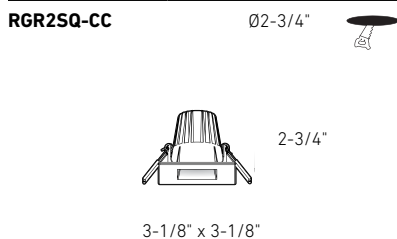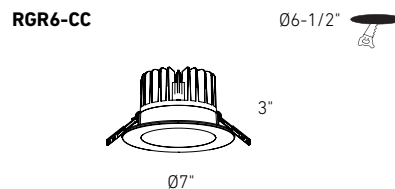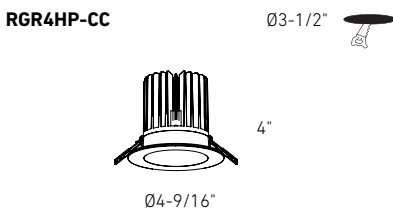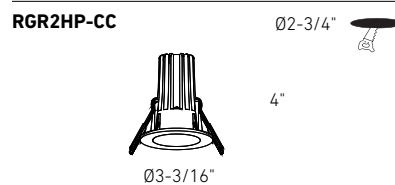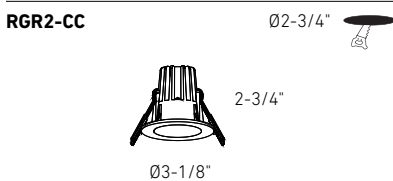

Specifications

Every fixture includes a junction box with integrated dimmable driver
Can be daisy chained (4" and 6" models only)
Aluminum construction
Switch-selectable CCT
40° beam angle
5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

Accessories

RFP-01

Rough-in plate for RGR1

RFP-23

Rough-in plate for RGR2, RGR2HP, RGR2SQ

RFP-35

Rough-in plate for RGR4, RGR4HP

RFP-46

Rough-in plate for RGR6,
RGR4SQ & RGR6SQ

RFP-UNI

Universal rough-in plate for RGR2, RGR2HP,
RGR2SQ, RGR4HP, RGR4SQ, RGR6, RGR6SQ

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NOTCH

The Notch series of regressed downlights is characterized by a deep-set LED position which greatly reduces glare, neatly packaged in a price-conscious solution to general lighting.




- WET
- LOW-GLARE
- AIR TIGHT
- IC RATED
- T24 JA8 CERTIFIED
- ETL Intertek

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
DRR2-CC	2"	9 W	500 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
DRR4-CC	4"	11 W	800 lm			or
DRR6-CC	6"	14 W	1000 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)

DRR2-CC

Ø2-3/4"



1-7/8"

Ø3-1/8"

DRR4-CC

Ø4-1/4"




1-13/16"

Ø4-3/4"

DRR6-CC

Ø6-1/2"



1-13/16"

Ø6-7/8"

**Specifications**

Every fixture includes a junction box with an integrated driver

Can be daisy chained
Smooth 360° wide spread
100° beam angle
Frosted lens
Edge lit technology
Switch-selectable CCT
5-year warranty

Finish

○ **WH** White

Accessories**RFP-23**

Rough-in plate (DRR2)

RFP-46

Rough-in plate (DRR4, DRR6)

RFP-UNI

Universal rough-in plate (DRR4, DRR6)

DRR4-TRIM-BK

4" recessed panel trim in black

DRR4-TRIM-SBA

4" recessed panel trim in sandblasted aluminum

DRR6-TRIM-BK

6" recessed panel trim in black

DRR6-TRIM-SBA

6" recessed panel trim in sandblasted aluminum

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ETCH

The Etch range of circular recessed downlights, characterized by a deep-set LED position, provides a functional solution to general lighting without the uncomfortable glare.




- 
WET
- 
LOW-GLARE
- 
AIR TIGHT
- 
IC
RATED
- 
T24
JA8
CERTIFIED
- 

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
DDP4-CC	4"	15 W	1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
DDP6-CC	6"	20 W	1500 lm			or V: 120 / 277 / 347V 0-10V dimming (Check for availability)


DDP4-CC

Ø4-1/4"



DDP6-CC

Ø6-1/2"



Specifications

Every fixture includes a junction box with an integrated driver
Can be daisy chained
Smooth 360° wide spread
125° beam angle
Frosted lens
Edge lit technology
Cast aluminum construction
Switch-selectable CCT
5-year warranty

Finish

○ **WH** White

Accessories

RFP-46

Rough-in plate

RFP-UNI

Universal rough-in plate

DDP4-TRIM-BK

4" recessed panel trim in black

DDP6-TRIM-BK

6" recessed panel trim in black

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

INDIRECT

Imagine being able to create the perfect mood when dimming your lights. This is now possible with our Dim to Warm concept, generating a warm, exquisite glow to set the tone for your evening.

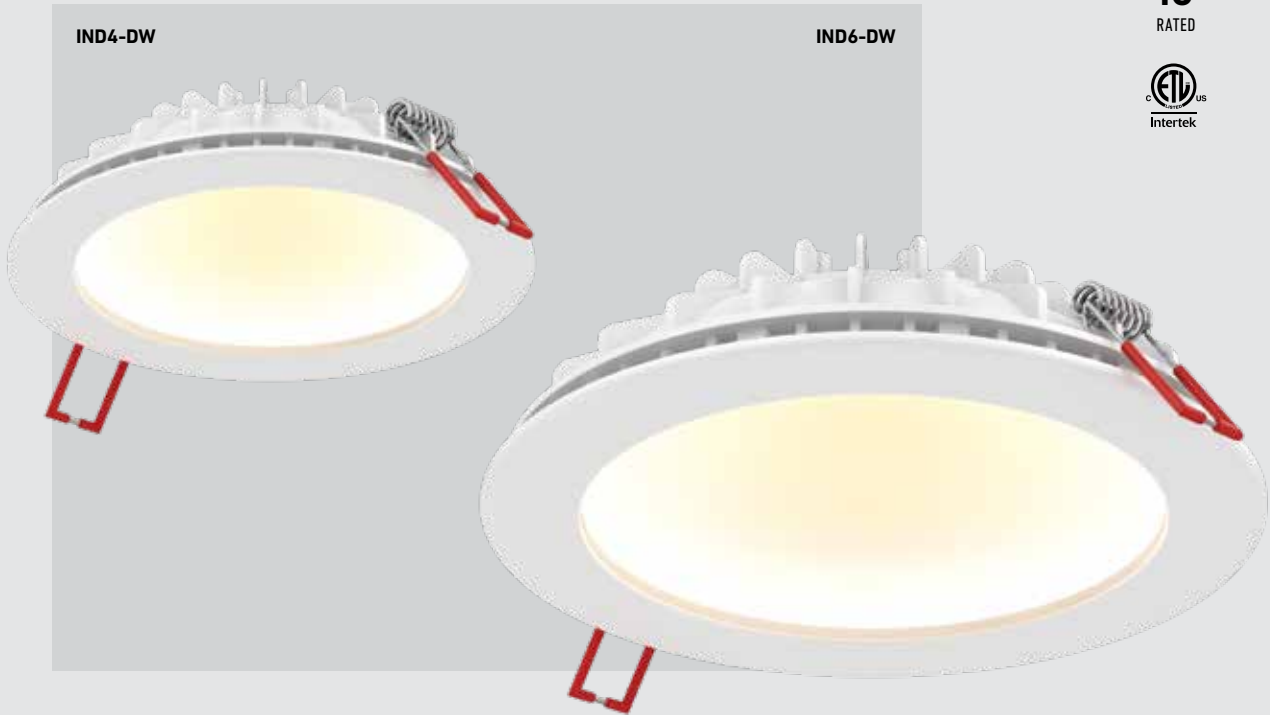

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
IND4-DW	4"	9 W	500 lm	80	3000 K - 2200 K	120 V
IND6-DW	6"	12 W	750 lm			

IND4-DW

Ø4-3/8"




1-1/2"

Ø4-1/4"

IND6-DW

Ø6-1/4"



2"

Ø7-1/8"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained

Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light

Smooth 360° wide spread

Dome reflector

110° beam spread

Indirect lighting design with glare reduction

Aluminum construction

5-year warranty

Finish

○ **WH** White

Accessories**RFP-UNI**

Universal rough-in plate

RFP-46

Rough-in plate for 4" and 6" models

REC-3K-EXT8FT

8-foot extension cable

REC-3K-EXT20FT

20-foot extension cable

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

PINPOINT

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light.

MSL1



MSL2




MSL4



MSL5



MSL5G

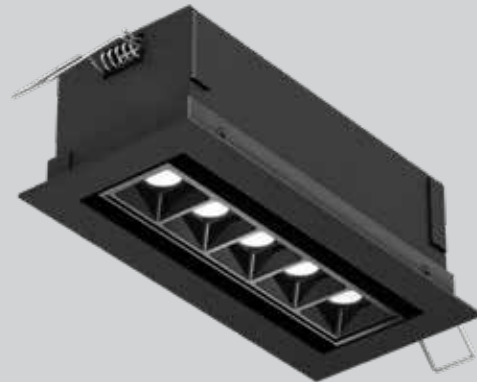



COLOR TEMPERATURE



DRY



LOW-GLARE



30°
SWIVEL/DIRECTIONAL*

IC
RATED



MSL10




MSL10G



*Models MSL5G-CC and MSL10G-CC only








PINPOINT

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
MSL1-CC*	1-15/16"	3 W	120 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
MSL2-CC	3-1/8"	6 W	320 lm			
MSL4-CC	3-1/8"	12 W	600 lm			or
MSL5-CC	6"	14 W	800 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)
MSL5G-CC	6-3/4"	14 W	800 lm			
MSL10-CC	11-5/8"	24 W	1300 lm			
MSL10G-CC	11-15/16"	24 W	1300 lm			

*MSL1-CC is available with standard 120V voltage only

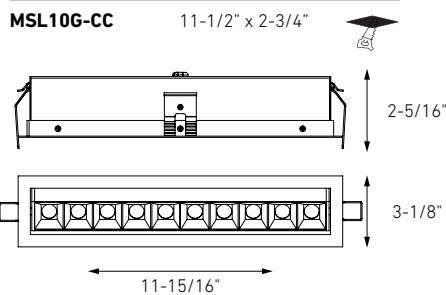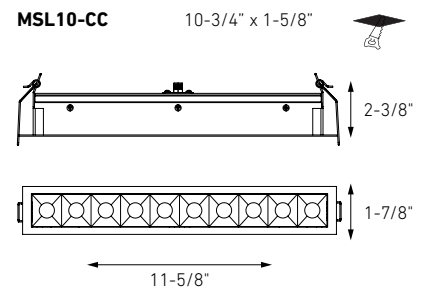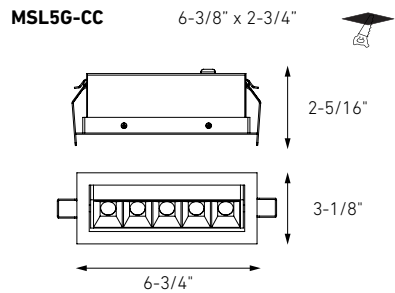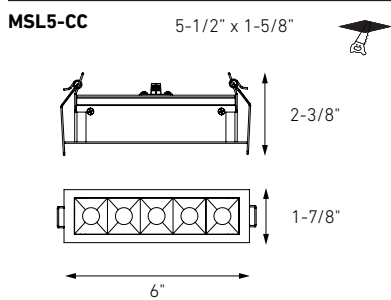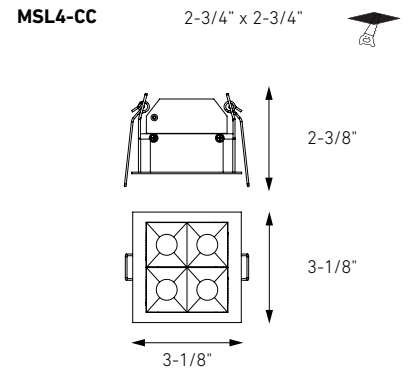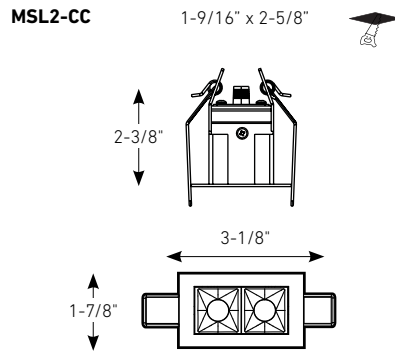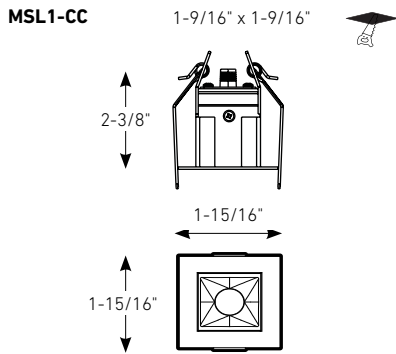

Specifications

Every fixture includes a junction box with integrated dimmable driver
Switch-selectable CCT
Can be daisy chained
Aluminum construction
30 degree swivel (models MSL5G and MSL10G only)
Low-glare
5-year warranty

Accessories

RFP-MSL1
Rough-in plate for MSL1

RFP-MSL2
Rough-in plate for MSL2

RFP-MSL4
Rough-in plate for MSL4

RFP-MSL5
Rough-in plate for MSL5

RFP-MSL5G
Rough-in plate for MSL5G

RFP-MSL10
Rough-in plate for MSL10

RFP-MSL10G
Rough-in plate for MSL10G

REC-CC-EXT8FT
8-foot extension cable

REC-CC-EXT20FT
20-foot extension cable

Finish

● **BK** Black
○ **WH** White

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

HILUX


Dals' high-powered recessed downlight is a go-to for your commercial projects. With its five color temperatures to choose from, a cast aluminum housing, high lumen output, and indoor/outdoor rating, this can be installed just about anywhere. From clinics to schools and hotels to boutiques, this is the only recessed fixture you will need.



- 
WET
- 
LOW-GLARE
- 
AIR TIGHT
- 
IC
RATED
- 
T24
JA8
CERTIFIED
- 
ETL
Intertek

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
HPD4-CC	4"	20 W	1415 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
HPD6-CC	6"	30 W	2100 lm			
HPD8-CC	8"	40 W	2600 lm			or V: 120 / 277 / 347V 0-10V dimming (Check for availability)

HPD4-CC


Ø4-1/4" 




2-1/8"

Ø5"

HPD6-CC


Ø6-1/2" 



2-1/2"

Ø7-1/4"

HPD8-CC

Ø7-1/2" 



2-1/2"

Ø8-3/4"



Specifications

Every fixture includes a junction box with an integrated driver

Switch-selectable CCT

Smooth 360° wide spread

90° beam angle

Cast aluminum construction

5-year warranty

Finish

● **BK** Black (HPD4 and HPD6 only)

○ **WH** White

Accessories

RFP-46

Rough-in plate for HPD4, HPD6

RFP-58

Rough-in plate for HPD8

RFP-UNI

Universal rough-in plate

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡



This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

BOULEVARD


The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

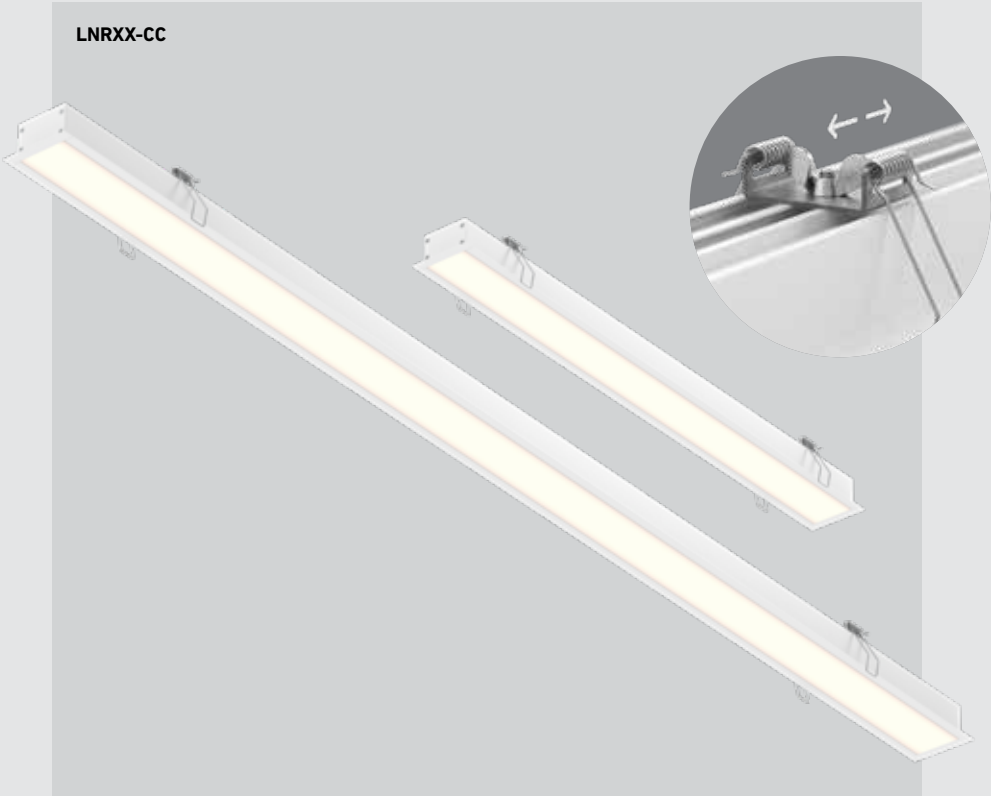


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
LNR24-CC	24"	20 W	1725 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LNR48-CC	48"	40 W	3760 lm			or V: 120 / 277 / 347V 0-10V dimming (Check for availability)

LNR24-CC

23-1/4" x 2-1/8"

**LNR48-CC**

47-1/4" x 2-1/8"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 Aluminum construction
 Switch-selectable CCT
 108° beam spread
 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories**LNACC-L16FT**

16-foot lens for Boulevard series pendants and recessed linears

RFP-LNR24

Rough-in plate for LNR24

RFP-LNR48

Rough-in plate for LNR48

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

More from this family

LNP48-CC
pg. 124



LNP48-CC
pg. 124



LNF48-CC
pg. 124

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

APERTURE

Ideal for residential spaces, art galleries, or boutiques, our multi-function downlight offers versatile performance. It transitions seamlessly between recessed and spotlight modes, allows beam angle adjustments, tilts 90 degrees, and features multi-wattage settings to adapt to various lighting needs.



NEW



W
MULTI-WATTAGE

AIR TIGHT

IC
RATED

**T24
JA8**
CERTIFIED


Intertek

ENERGY STAR

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
MFD03-MW-CC	3"	8, 10, 12 W	600, 800, 1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V TRIAC dimming or V: 120 / 277 / 347V 0-10V dimming (Check for availability)

MFD03-CC

Ø3-3/8" 

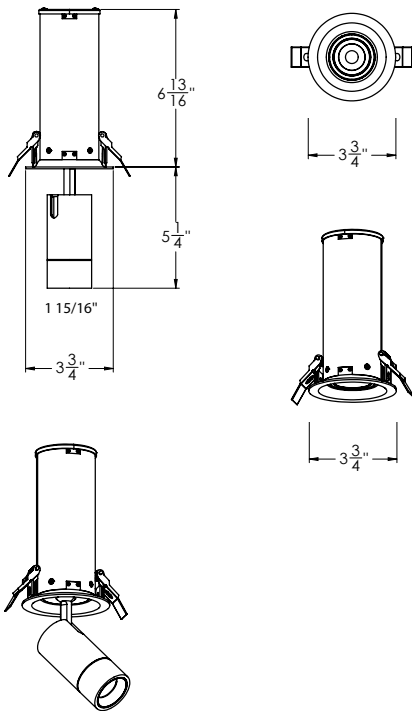

Specifications

Every fixture includes a junction box with integrated dimmable driver
Switch-selectable CCT
Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the jbox
Can be daisy chained
90° tilting, 360° rotation
Adjustable beam angle from 30° to 60°
5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

RFP-231
Rough-in plate
RFP-UNI
Universal rough-in plate
REC-CC-EXT8FT
8-foot extension cable
REC-CC-EXT20FT
20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

HORUS

A versatile lighting solution with a flexible design for precise illumination, its gimbal mechanism allows users to easily adjust the light angle, making it ideal for residential or commercial settings. The compact 3-inch size is suitable for tight spaces, and the spotlight's focused beam makes it perfect for accent lighting or task-oriented applications.



UPGRADE



COLOR TEMPERATURE



DAMP

360°

SWIVEL/DIRECTIONAL



AIR TIGHT

IC

RATED




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
GSP3-CC	3"	12 W	950 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
						or
						V: 120 / 277 / 347V 0-10V dimming (Check for availability)



GSP3-CC

Ø2-3/4"



Specifications

Every fixture includes a junction box with an integrated driver
Switch-selectable CCT
60° beam angle
30° tilting, 360° rotation
Cast aluminum construction
5-year warranty

Finish

- **BK** Black
- **GD** Gold
- **WH** White

Accessories

RFP-23

Rough-in plate

RFP-UNI

Universal rough-in plate

GSP-CC-EXT8FT

8-foot extension cable

GSP-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.

GBR35-CC, GBR35-DW



GBR04-CC, GBR04-DW




GBR06-CC, GBR06-DW



GBR35SQ-CC



NEW



COLOR TEMPERATURE



IC
RATED


T24
JA8
CERTIFIED



GBR35-CC-DUO



GBR35-CC-TRIO

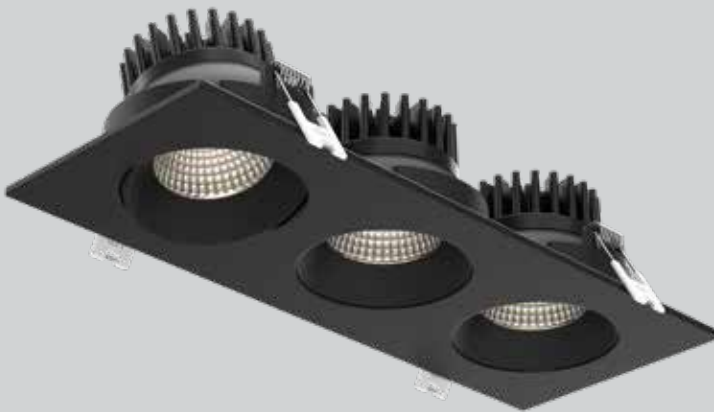


*Models GBR35-DW, GBR04-DW, GBR06-DW only

**Model GBR04-CC only

NEW

REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.



COLOR TEMPERATURE



WET



WARM DIMMING*



LOW-GLARE



SWIVEL/DIRECTIONAL



AIR TIGHT

IC
RATEDT24
JA8
CERTIFIED

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
GBR35-CC	3.5"	12 W	860 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
GBR04-CC	4"	15 W	1240 lm			
GBR06-CC	6"	20 W	1500 lm			or
GBR35-DW†	3.5"	12 W	825 lm		3000 K - 2200 K	V: 120 / 277 / 347V 0-10V dimming (Check for availability)
GBR04-DW†	4"	15 W	1210 lm			
GBR06-DW†	6"	20 W	1540 lm			
GBR35SQ-CC	3.5"	12 W	860 lm		2700, 3000, 3500, 4000, 5000 K	
GBR35-CC-DUO	2x 3.5"	24 W	1740 lm			
GBR35-CC-TRIO	3x 3.5"	36 W	3010 lm			


*Models GBR35-DW , GBR04-DW, GBR06-DW only

**Model GBR04-CC only


†Not available in multi-voltage

GBR35-CC, GBR35-DW


Ø3-1/2"

**GBR04-CC, GBR04-DW**


Ø4-1/4"

**GBR06-CC, GBR06-DW**


Ø6-1/2"

**GBR35SQ-CC**


Ø3-1/2"

**GBR35-CC-DUO**

7-1/8" x 3-1/2"

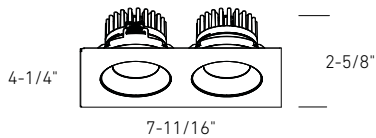**GBR35-CC-TRIO**

10-1/2" x 3-1/2"

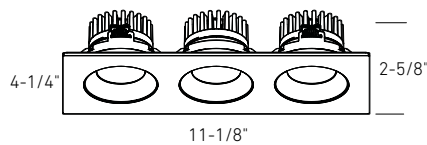**Specifications**

Every fixture includes a junction box with an integrated driver

Can be daisy chained

30° tilting, 360° rotation

Switch-selectable CCT (CC models only)

Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light (GBRXX-DW models only)

40° beam angle

30° tilting, 360° rotation

5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories**RFP-35**

Rough-in plate for GBR35, GBR35SQ

RFP-UNI

Universal rough-in plate for GBR04, GBR06

RFP-46

Rough-in plate for GBR04, GBR06

RFP-DUO

Rough-in plate for GBR35-DUO

RFP-TRIO

Rough-in plate for GBR35-TRIO

REC-CC-EXT8FT

8-foot extension cable for GBRXX-CC models

REC-CC-EXT20FT

20-foot extension cable for GBRXX-CC models

REC-3K-EXT8FT

8-foot extension cable for GBRXX-DW models

REC-3K-EXT20FT

20-foot extension cable for GBRXX-DW models

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

PIVOT

When searching for lighting flexibility, look no further than our 3", 4" & 6" flat gimbal LED downlights. With powerful lumen output and the ability to direct light with a 360° rotation and a 90° tilt angle, this product will meet your every need.

FGM4-3K, FGM4-CC



FGM2-CC



FGM3-CC




FGM6-CC



FGM4SQ-CC



NEW



FGM4-CC-DUO



FGM4-CC-TRIO




*Not available for model FGM4-3K
**Models FGM3-3k, FGM3-CC, FGM4-CC, and FGM4SQ-CC only

NEW

PIVOT

When searching for lighting flexibility, look no further than our 4-inch square flat gimbal LED downlight. With a powerful lumen output and the ability to direct light through a 360° rotation and a 90° tilt angle, this product will meet all your lighting needs.



COLOR TEMPERATURE*



90°

SWIVEL/DIRECTIONAL



AIR TIGHT

IC
RATEDT24
JA8
CERTIFIED

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
FGM4-3K	4"	9 W	700 lm	90	3000 K	120V TRIAC dimming
FGM2-CC	2"	6 W	500 lm		2700, 3000, 3500, 4000, 5000 K	or
FGM3-CC	3"	6 W	570 lm			
FGM4-CC	4"	9 W	800 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)
FGM6-CC	6"	14 W	1050 lm			
FGM4SQ-CC	4"	9 W	800 lm			
FGM4-CC-DUO	2x 4"	18 W	1475 lm			
FGM4-CC-TRIO	3x 4"	27 W	2300 lm			

*Not available for model FGM4-3K

**Models FGM3-3k, FGM3-CC, FGM4-CC, and FGM4SQ-CC only

FGM2-CC

Ø2-3/4"

**FGM3-CC**

Ø3-3/8"

**FGM4-CC**

Ø4-1/4"

**FGM6-CC**


Ø6-1/4"

**FGM4SQ**


Ø4-1/4"

**FGM4-CC-DUO**

8-5/8" X 4-3/4"

**FGM4-CC-TRIO**

13" X 4-5/8"

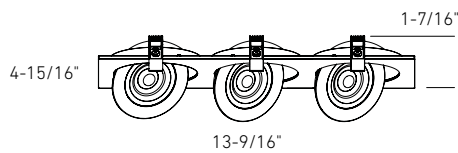**Specifications**

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 90° tilting, 360° rotation
 Aluminum construction
 Switch-selectable CCT
 Low profile
 40° beam spread
 5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel (FGM4, FGM6 only)
- **WH** White

Accessories**RFP-UNI**

Universal rough-in plate

RFP-23

Rough-in plate for 3" model

RFP-46

Rough-in plate for 4" and 6" models

RFP-DUO

Rough-in plate for FGM4-CC-DUO

RFP-TRIO

Rough-in plate for FGM4-CC-TRIO

REC-3K-EXT8FT

8-foot extension cable for FGM4-3K

REC-3K-EXT20FT

20-foot extension cable for FGM4-3K

REC-CC-EXT8FT

8-foot extension cable for FGMX-CC models

REC-CC-EXT20FT

20-foot extension cable for FGMX-CC models

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SCOPE

There are moments when you want the ability to direct light as you please. With our LED Gimbal recessed fixture, this has now become a reality with the easiest of installations.



COLOR TEMPERATURE



WET

30°

SWIVEL/DIRECTIONAL



AIR TIGHT

IC

RATED

T24

JA8

CERTIFIED



Intertek


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
GMB2-CC	2"	8 W	725 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LEDDOWNG3-CC	3"	8 W	680 lm			or
GMB4-CC	4"	11 W	810 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)

GMB2-CC

Ø2-1/4"



1-5/8"




Ø2-1/2"

GMB4-CC

Ø4-1/4"



1-5/8"




Ø4-7/8"

LEDDOWNG3-CC

Ø2-3/4"



2"



Ø3-1/4"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained (3" and 4" models only)

30° tilting, 360° rotation

Aluminum construction

Switch-selectable CCT

Low profile

40° beam spread

5-year warranty

Finish

- ☒ **BK** Black
- ☐ **SN** Satin Nickel (3" and 4" models only)
- ☐ **WH** White

Accessories**RFP-UNI**

Universal rough-in plate for 3" and 4" models

RFP-GMB2

Rough-in plate for GMB2-CC

RFP-23

Rough-in plate for LEDDOWNG3-CC

RFP-46

Rough-in plate for GMB4-CC

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

FUSION

The Fusion is a slim gimbal recessed panel with 5CCT, offering advanced lighting flexibility for precise illumination. Its gimbal design allows users to direct light as needed, and the 5CCT feature provides color temperature versatility, making the Fusion an ideal choice for both residential and commercial applications.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
GPN4-CC	4"	10 W	850 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
GPN6-CC	6"	13 W	1050 lm			

or

V: 120 / 277 / 347V
0-10V dimming
(Check for availability)

GPN4-CC

Ø4-1/4"




1-1/2"

Ø4-15/16"

GPN6-CC

Ø6-1/4"



1-3/4"

Ø7"



Specifications

Every fixture includes a junction box with an integrated driver

Switch-selectable CCT

110° beam angle

25° tilting, 360° rotation

Cast aluminum construction

5-year warranty

Finish

● **BK** Black

○ **WH** White

Accessories

RFP-UNI

Universal rough-in plate

RFP-46

Rough-in plate for 4" and 6" models

GPN-CC-EXT8FT

8-foot extension cable

GPN-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) ⚡




This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


MYSTIQUE


If you are looking for a sleek, attractive LED option for your ceilings, then our color-changing panel light with interchangeable trims is the perfect choice. With the flick of a switch, you have the ability to select one of five pre-set color temperatures – 2700K, 3000K, 3500K, 4000K, and 5000K – convenience at your fingertips.

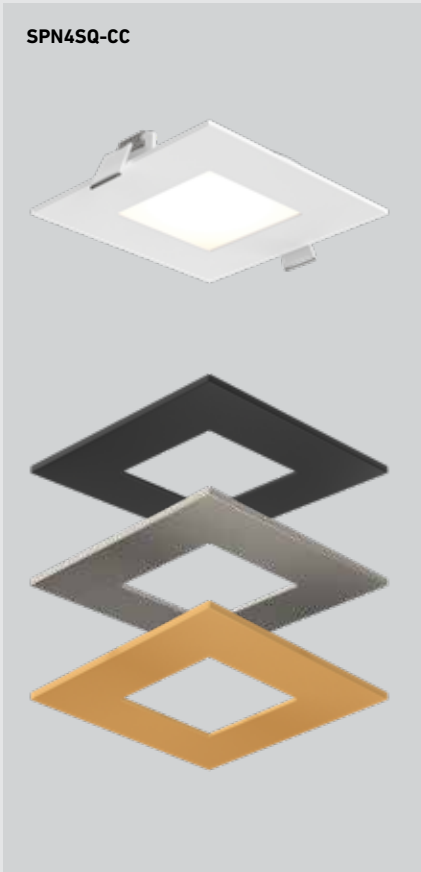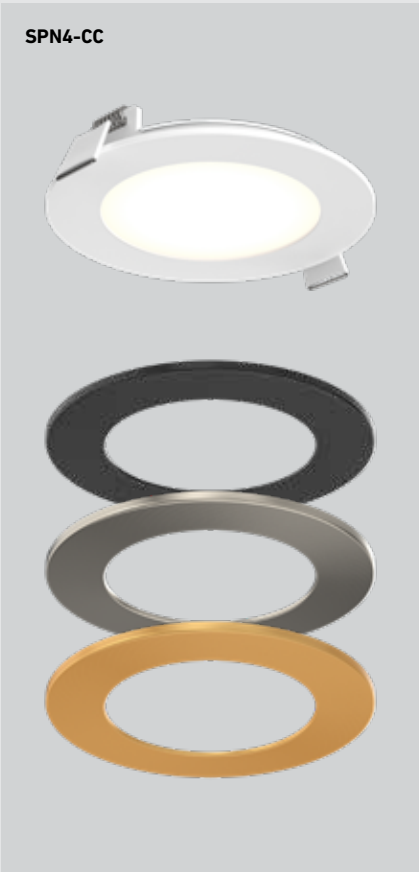


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
SPN4-CC	4"	11 W	800 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
SPN4SQ-CC	4"	11 W	800 lm			or
SPN6-CC	6"	14 W	1100 lm			V: 120 / 277 / 347V
SPN6SQ-CC	6"	14 W	1100 lm			0-10V dimming (Check for availability)


SPN4-CC Ø4-1/4" 




SPN6-CC Ø6-1/2" 



SPN4SQ-CC Ø4-1/4" 



SPN6SQ-CC Ø6-1/2" 



Specifications

Every fixture includes a junction box with integrated dimmable driver
Can be daisy chained
Switch-selectable CCT
3 interchangeable trim colors included
110° beam angle
Aluminum construction
5-year warranty

Finish

-  **BK** Black
-  **GD** Gold
-  **SN** Satin Nickel
-  **WH** White

Accessories

RFP-UNI
Universal rough-in plate

RFP-46
Rough-in plate for 4" and 6" models

5000-EXT8FT
8-foot extension cable

5000-EXT20FT
20-foot extension cable

Multi-voltage (V)


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

EXCEL

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.



COLOR TEMPERATURE



WET



WARM DIMMING¹



FIRE RATED²



AIR TIGHT

IC

RATED

T24
JA8

CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
5003-CC	3"	8 W	600 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V TRIAC dimming
5004-CC	4"	11 W	800 lm			
5005-CC	5"	12 W	900 lm			or
5006-CC	6"	14 W	1100 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)
5004SQ-CC	4"	11 W	800 lm			
5004-FR-CC*	4"	11 W	825 lm	80		
5006-FR-CC*	6"	14 W	1230 lm	80		
5004-DW**	4"	11 W	850 lm	80	3000 K - 2200 K	120V

¹Model 5004-DW only


²Models 5004-FR-CC, 5006-FR-CC only

*2-hour fire-rated without additional housing or hardware, in accordance with UL 263, ASTM E119, and CAN ULC S101


**Dim-to-warm technology dims from 3000 K to 2200 K, Not available in multi-voltage

5003-CC


Ø3-3/8"

**5004-CC**

Ø4-1/4"

**5005-CC**


Ø5-3/8"

**5006-CC**


Ø6-1/2"

**5004SQ-CC**

Ø4-1/4"

**5004-DW**

Ø4-1/4"

**5004-FR**

Ø4-1/4"

**5006-FR**

Ø6-1/2"



Specifications

Every fixture includes a junction box with an integrated driver
 Can be daisy chained
 Smooth 360° wide spread
 Frosted lens
 Edge lit technology
 Aluminum construction
 Switch-selectable CCT
 Very low profile
 5-year warranty

Finish

- **BK** Black (3", 4", and 6" models only)
- **SN** Satin Nickel (5004, 5004-DW only)
- **WH** White

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

REC-TRIM4-BK/GD/SN (5004)

4" recessed panel trim in black, gold, or satin nickel

REC-PT4-GD (5004-DW)

4" recessed panel trim in gold or satin nickel

REC-TRIM6-BK/GD/SN (5006)

6" recessed panel trim in black, gold, or satin nickel

5000-EXT8FT

8-foot extension cable

5000-EXT20FT

20-foot extension cable

RFP-23 (5003)

Rough-in plate

RFP-46 (5004, 5006)

Rough-in plate

RFP-58 (5005)

Rough-in plate

RFP-UNI (5003, 5004, 5006)

Universal rough-in plate

ACCESS

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.



DAMP



AIR TIGHT

IC

RATED



Intertek

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
2003	3"	6 W	400 lm	80	3000 K	120 V
2004	4"	9 W	600 lm			
2006	6"	11 W	800 lm			


2003-WH

Ø3-3/8"




2004-WH

Ø4-1/4"



2006-WH

Ø6-1/2"



Specifications

Every fixture includes a junction box with an integrated driver

Can be daisy chained

Superior LED performance and lifespan

Frosted lens

Edge lit technology

Aluminum construction

Very low profile

5-year warranty

Finish

○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

REC-TRIM4-BK/GD/SN (2004)

4" recessed panel trim in black, gold, or satin nickel

REC-TRIM6-BK/GD/SN (2006)

6" recessed panel trim in black, gold, or satin nickel

2000-EXT8FT

8-foot extension cable

2000-EXT20FT

20-foot extension cable

RFP-23

Rough-in plate for 2003

RFP-46

Rough-in plate for 2004, 2006

RFP-UNI

Universal rough-in plate for 2004, 2006

NEW

ALTER SERIES

This aluminum retrofit LED panel offers the easiest and most practical solution for upgrading your outdated recessed lighting. For style and convenience, the removable outer trim attaches with magnetic fasteners, creating a seamless look. It can be easily retrofitted into existing 4" canisters or standard octagonal junction boxes.



COLOR TEMPERATURE*




**T24
JA8**
CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RTJB4-3K	4"	9 W	550 lm	90	3000 K	120 V
RTJB3-CC	3"	8 W	620 lm		2700, 3000, 3500,	
RTJB4-CC	4"	9 W	565 lm		4000, 5000 K	


*Not available for model RTJB4-3K

RTJB3-CC




Ø4-3/4" x 1-1/8"

RTJB4-XX + RTJB4-ACC

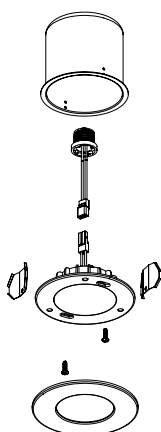

RTJB4-XX



Ø4-7/8" x 1-1/8"



Specifications

Fits on U.S. and Canadian octagonal junction boxes (RTJB3 only)
Integrated dimmable driver
Fire rated alternative when mounted onto a fire rated junction box
Minimal heat emission
Aluminum construction
Switch-selectable CCT (models RTJB3-CC, RTJB4-CC only)
Magnetic trim finish
5-year warranty

Finish

○ **WH** White

Accessories

RTJB4-ACC
4" recessed can mounting kit for RTJB4-XX - clips and E26 socket


RTJB4-TRIM-BK
4" recessed panel trim in black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

ALTER SERIES

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation. The change will be illuminating.



DRY



RETROFIT

**T24
JA8**


CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDPNLRTF56-CC	6"	10 W	720 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V



LEDPNLRTF56-CC

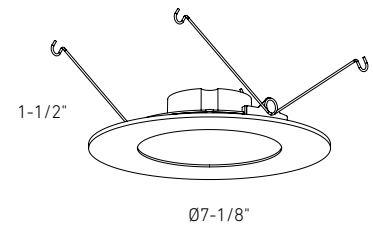

Specifications

120V AC, A19 bulb replacement
 Fits into 5-1/2" to 6" recessed housings
 Integrated dimmable driver
 Switch-selectable CCT
 Aluminum trim and housing
 Frosted lens
 Edge-lit technology
 Very low profile
 5-year warranty









Finish








○ **WH** White

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.






ACCESSORIES









Model	Description		Specifications
RFP-UNI	Universal drilling plate 	Ø2 3/4" Ø3 3/8" Ø4 1/4" Ø6 1/2"	Expandable with on-center spacing up to 24" Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-GMB2	Drilling plate for GMB2-CC recessed fixture 	Ø2-1/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-23	Drilling plate for 2 and 3" fixtures 	Ø2-3/4" Ø3-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-35	Drilling plate for 3.5" fixtures 	Ø3-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-46	Drilling plate for 4 and 6" fixtures 	Ø4-1/4" Ø6-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-58	Drilling plate for 5 and 8" fixtures 	Ø5-3/8" Ø7-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-RC06	Drilling plate for 6" customizable recessed fixture 	Ø6"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish

Model	Description		Specifications
RFP-MSL1	Drilling plate for MSL1 recessed fixture 	1-9/16" X 1-9/16"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL2	Drilling plate for MSL2 recessed fixture 	1-9/16" X 2-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL4	Drilling plate for MSL4 recessed fixture 	2-3/4" X 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL5	Drilling plate for MSL5 recessed fixture 	5-1/2" X 1-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL5G	Drilling plate for MSL5G recessed fixture 	6-3/8" X 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL10	Drilling plate for MSL10 recessed fixture 	10-3/4" X 1-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-MSL10G	Drilling plate for MSL10G recessed fixture 	11-1/2" X 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish


ACCESSORIES

Model	Description		Specifications
RFP-LNR24	Drilling plate for LNR24-CC, LNR24-CC-V, DCP-LNR24	2-1/8" X 23-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-LNR48	Drilling plate for LNR48-CC, LNR48-CC-V, DCP-LNR48	2-1/8" X 47-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-DUO	Drilling plate for FGM4-CC-DUO and GBR35-CC-DUO recessed fixtures	7-1/8" X 3-1/2" 8-5/8" X 4-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-TRIO	Drilling plate for FGM4-CC-TRIO and GBR35-CC-TRIO recessed fixtures	10-3/8" X 3-5/8" 13" X 4-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish

Model		Finish	Specification
GMB2-GOOF		White	Goof ring for GMB2 recessed lights Allows 2" fixtures to fit in a hole with a maximum diameter of 3-3/4"
REC-GOOF2		White	Goof ring for 2" recessed lights (not compatible with RGM2) Allows 2" fixtures to fit in a hole with a maximum diameter of 3-3/4"
LEDDOWNACC-GOOF3		White	Goof ring for 3" recessed lights Allows 3" fixtures to fit in a hole with a maximum diameter of 4-3/4"
LEDDOWNACC-GOOF4		White Black	Goof ring for 4" recessed lights Allows 4" fixtures to fit in a hole with a maximum diameter of 6"
LEDDOWNACC-GOOF6		White	Goof ring for 6" recessed lights Allows 6" fixtures to fit in a hole with a maximum diameter of 8"


Model		Finish	Specification
REC-PT4-GD		Gold	4" recessed panel trim Compatible products: 5004-DW
REC-TRIM4-BK REC-TRIM4-GD REC-TRIM4-SN REC-TRIM6-BK REC-TRIM6-GD REC-TRIM6-SN		Black Gold Satin Nickel	4" and 6" panel trims Compatible products: 2004, 2006 5004-CC, 5006-CC
RTJB4-TRIM-BK		Black	4" recessed panel trim Compatible products: RTJB4-3K, RTJB4-CC
RTJB4-ACC		-	4" recessed can mounting kit for RTJB4-XX - clips and E26 socket
DDP4-TRIM-BK DDP6-TRIM-BK		Black	4" and 6" regressed panel trims Compatible products: DDP4-CC, DCP-DDP4, DDP6-CC, DCP-DDP6
DRR4-TRIM-BK DRR4-TRIM-SBA DRR6-TRIM-BK DRR6-TRIM-SBA		Black Sandblasted aluminum	4" and 6" regressed panel trims Compatible products: DRR4-CC, DRR6-CC
2000-EXT8FT 2000-EXT20FT REC-3K-EXT8FT REC-3K-EXT20FT		White	8-foot extension cord for 2-pin recessed fixtures 20-foot extension cord for 2-pin recessed fixtures Male/female connector for quick-connect installation. Connect together for a total length of up to 40 feet
5000-EXT8FT 5000-EXT20FT GPN-CC-EXT8FT GPN-CC-EXT20FT GSP-CC-EXT8FT GSP-CC-EXT20FT REC-CC-EXT8FT REC-CC-EXT20FT		White	8-foot extension cord for 3-pin recessed fixtures 20-foot extension cord for 3-pin recessed fixtures Male/female connector for quick-connect installation. Connect together for a total length of up to 40 feet



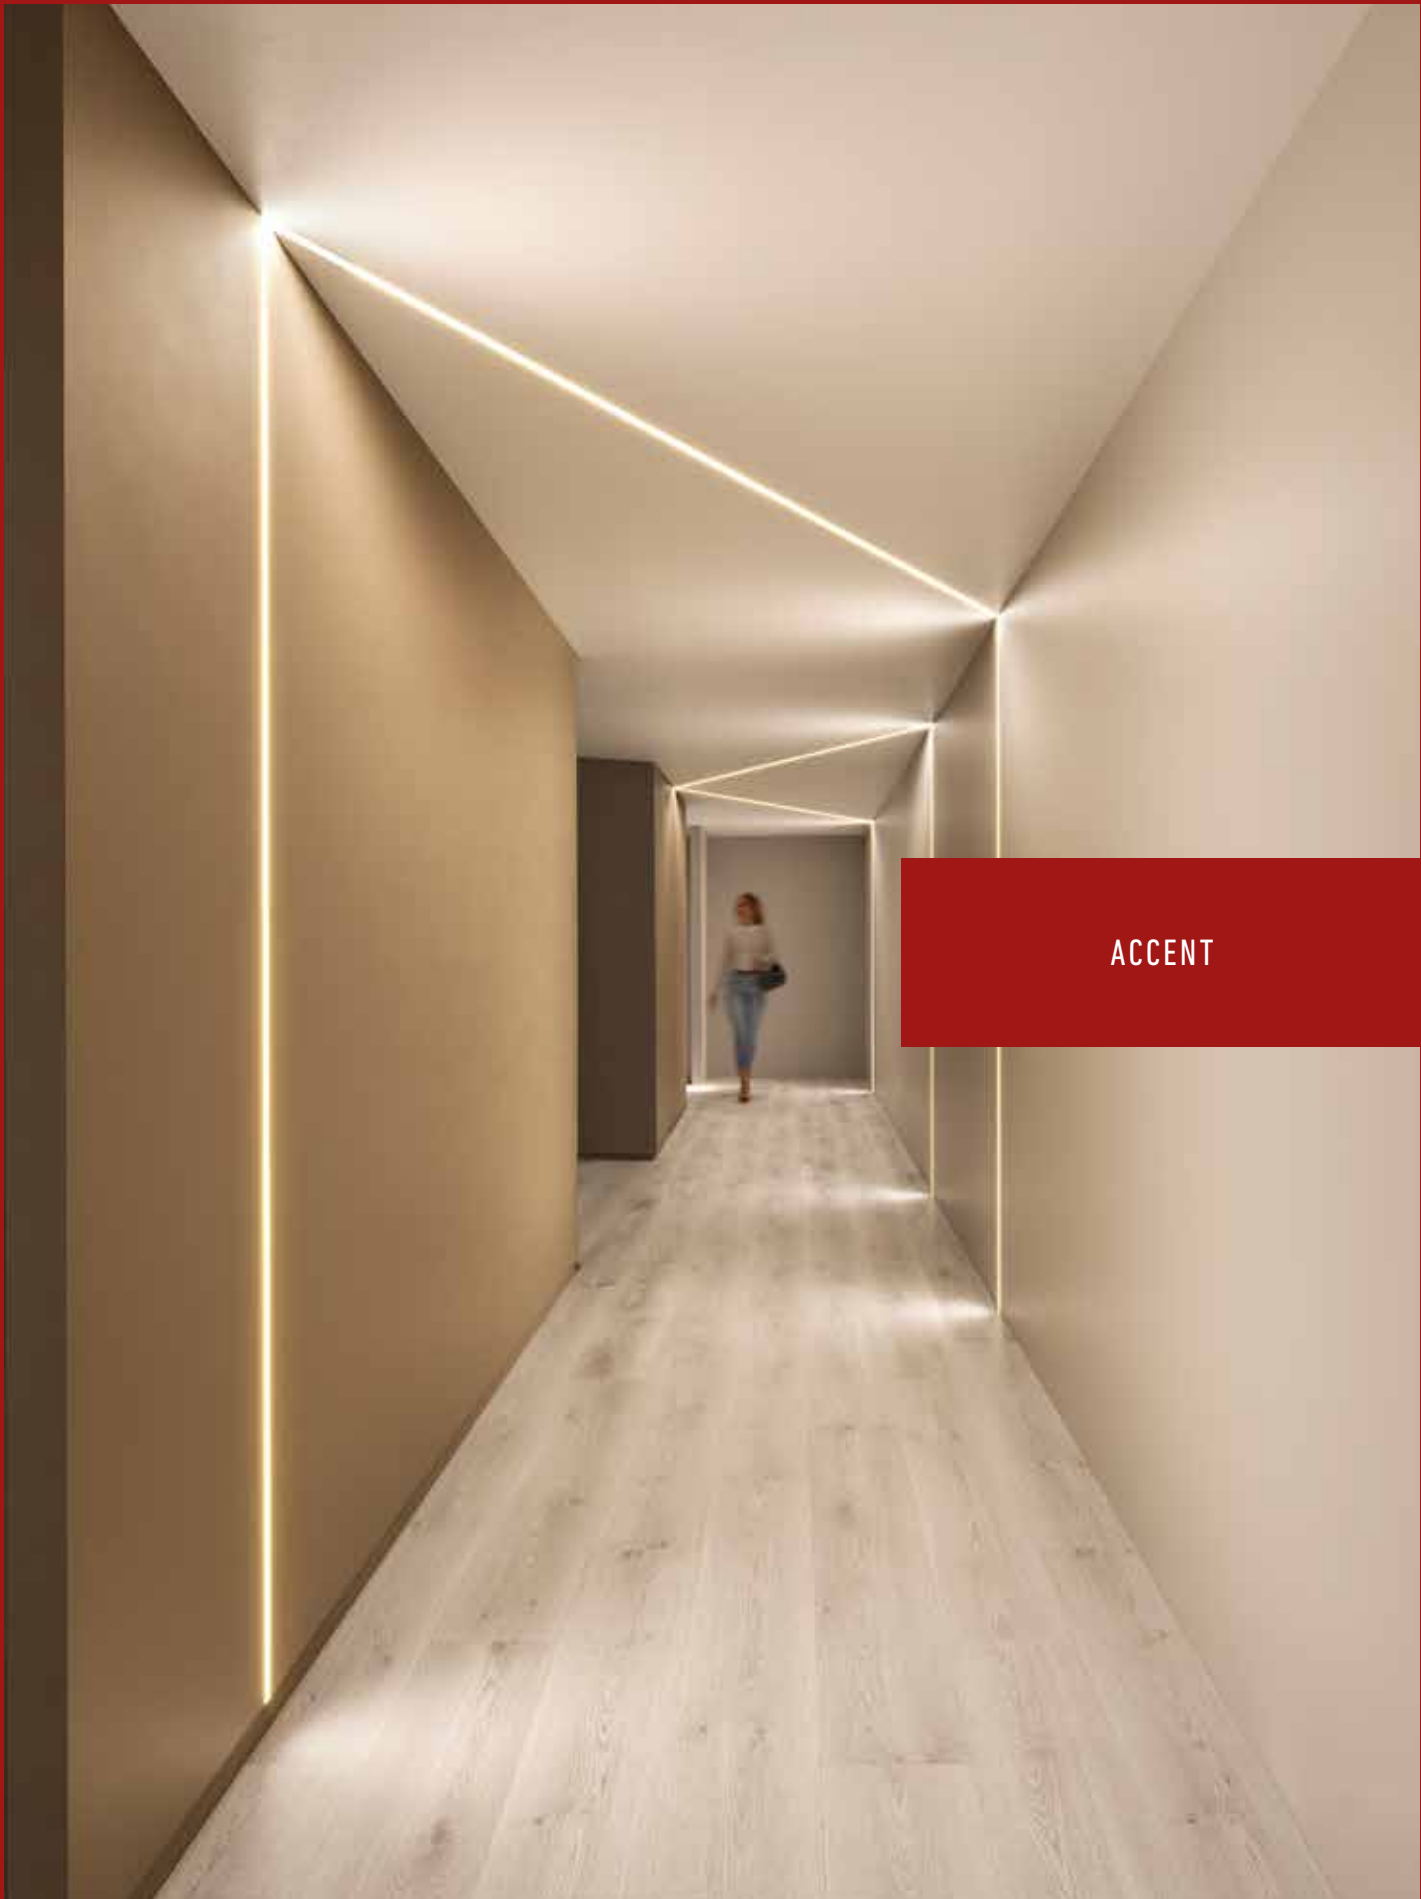


ACCENT

12 V



86

**INSTALLATION
GUIDE**



88

COB-TAPE
COBTP1M/ COBTP5M/
COBTP-REEL



90

SWIVLED12-CC



91

**SUPER-PUCK
RECESSED**
4001-CC



92

DUO-PUCK
4005-CC
K4005-CC



93

MINI-PUCK
LEDRDM1



94

ECO-PUCK
LEDROP18



95

SLIDE
DD1260

24 V



96

COB-TAPE
COBTP24V-K10FT-CC
COBTP24V-K20FT-CC
COBTP24V-R50FT-CC
COBTP24V-R100FT-CC

120 V



98

POWERLED PUCK
6001-CC



99

POWERLED LINEAR
6009CC/ 6012CC/
6024CC/ 6036CC/
6048CC100



100

PROLED LINEAR
HLF09/ HLF12/ HLF18/
HLF24/ HLF30



102

COUNTERLED LINEAR
9009CC/ 9012CC/
9018CC /9024CC/
9030CC

GENERAL



104

**LED DIMMABLE
DRIVERS**



106

ACCESSORIES



Proper Sizing, Spacing and Lighting Techniques


As its name suggests, under cabinet lighting refers to lights that are installed under a cabinet, resulting in illumination of the area immediately below a section of cabinets. It is most commonly used in kitchen areas, where additional lighting is useful for food preparation.

Types of under cabinet lighting



Puck lights

Pucks are the most versatile products as they can be installed in any application. Most of our pucks can be either surface-mounted or recessed into cabinetry, ensuring a flush surface appearance. Our pucks are designed to provide smooth and uniform light output.



Linears

Linears are ideal for efficient and uniform solutions. All our linears are designed for surface mounting, and many of them can pivot to focus on features such as the backsplash. Most linears come in various sizes, allowing them to be combined to cover the length of most surfaces.




Tape lights

Tape lights are flexible rolls of LEDs with adhesive backs, suitable for virtually any application, extending beyond under-cabinet lighting. Tape lights have a super low profile and are easy to install.

How many do I need?


If you are installing pucks, we recommend spacing them approximately 24 inches apart. For linears, you can either seamlessly install them from end to end or leave a gap equivalent to the size of the product.

Power source




Low-voltage (12 V)

A 12V system includes a driver and fixtures, with one driver powering multiple products. It allows for compact fixture designs and uses thin, flexible wiring for easier installation.



Low-voltage (24 V)

A 24V system also uses a driver and fixtures, supporting longer wiring runs than 12V. It enables sleek designs and employs thin, flexible wiring for streamlined installations.



Direct wire (120 V)

120V direct means that no other components are required to power the product. Either the LED's are 120V direct or a driver is integrated in each product. The advantage of a 120V product is the ease of installation.

Dimmer/driver switch (12V)

Replace your 12V driver with an integrated driver/dimmer to control the brightness of your low-voltage lights. Simply connect this unit to your 120V input current to regulate your low-voltage lighting.

Choosing the right driver

We offer a wide range of plug-in (A), direct wire (B), and dimmer/driver switches (C). To select the correct driver, simply add up the wattage from all your lights and choose a driver with a higher wattage that suits your specific needs.

Connections

Direct wire

Direct wire systems are typically installed by electrical contractors. This means the power feed is connected directly inside the product or driver, without any plugs, and with no exposed wires. Direct wire installations must be enclosed in a connection box with sufficient volume to ensure a safe connection. All our direct wire products feature built-in connection boxes with convenient knockouts to discreetly route the wiring.

Plug-in

Plug-in options are really easy to install as they plug directly into an electrical outlet.

Dimmer/driver switch


Dimmer/driver switch systems, two-in-one integrated units often installed by qualified electricians, seamlessly replace your standard wall switch and transformer simultaneously. This involves connecting the power feed directly inside the switch, eliminating the need for plugs and exposed wires.

**GOOD
TO KNOW!**

For optimal dimming try to use up at least 50% of the driver's capacity. For example, if all products come up to 10 watts, you would be much better off with a 12W driver than a 24W driver.

COB-TAPE

This tape will not only emit a wonderful warm glow but also provide you with continuous, seamless light. You can cut it every inch and reattach it with the supplied connectors. No more waste.

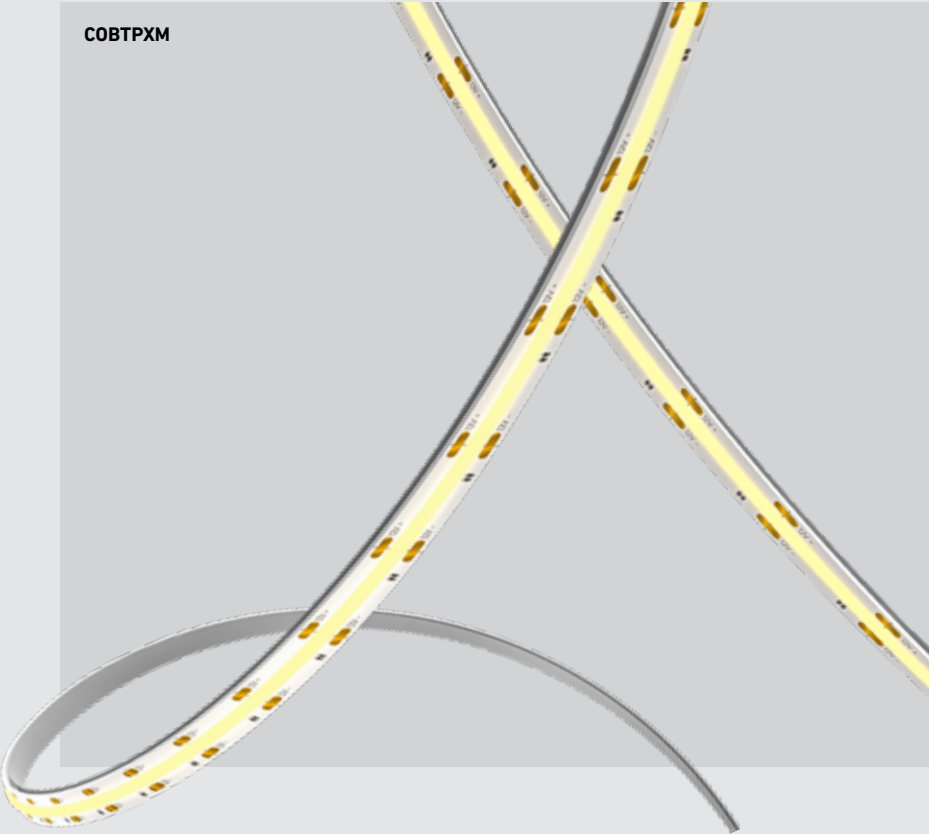

3000k

COLOR TEMPERATURE



DRY



VOLTAGE




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
COBTP3M	3m (118")	24 W	1500 lm	90	3000 K	12 V
COBTP5M	5m (196")	48 W	2250 lm			
COBTP-REEL*	20m (65')	8 W /meter	500 lm /meter			

*20m COB reels do not include a 12V driver. Plug-in or hard-wired power supply required for installation. Sold separately.

COBTP3M	1 x 3m
COBTP5M	1 x 5m
COBTP-REEL*	1 x 20m (65')

* Driver not included

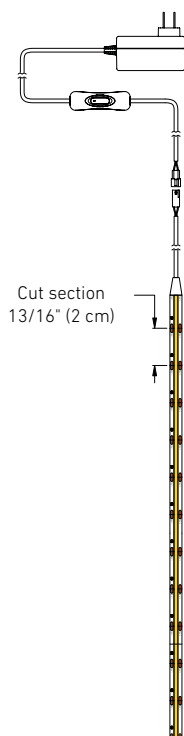

Specifications

12V DC LED plug-in driver included
(3m=24w / 5m=48w)
Seamless light emission (360 LEDs/meter)
Can be cut at every cut mark (every 2 cm)
Maximum run length of 5m (196") in a series
Dimmable with DALI dimming
power supply and most low-voltage
electronic dimmers
5-year warranty

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver

ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired

DD1260
LED driver and dimmer in one unit

BT06DIM-IC
6W dimmable LED hardwire driver

BT12DIM-IC
12W dimmable LED hardwire driver

BT24DIM-IC
24W dimmable LED hardwire driver

BT36DIM
36W dimmable LED hardwire driver

BT48DIM
48W dimmable LED hardwire driver

Accessories

COBTP-ALXT-BK
1 meter black aluminum extrusion
with black lens

COBTP-ALXT-WH
1 meter white aluminum extrusion
with white lens

COBTP-ALXT-L5M-BK
5 meter black lens for extrusions

COBTP-ALXT-L5M-WH
5 meter white lens for extrusions

COBTP-EXT02
2" extension with reconnect connectors


COBTP-EXT24
24" extension with reconnect connectors

COBTP-EXT60
60" extension with reconnect connectors

COBTP-CC06
Connection cord for hard-wired
driver installation


SWIVLED

A 5CCT ultra-slim LED strip can be fixed or directional. Both types of brackets are included, the choice is yours.

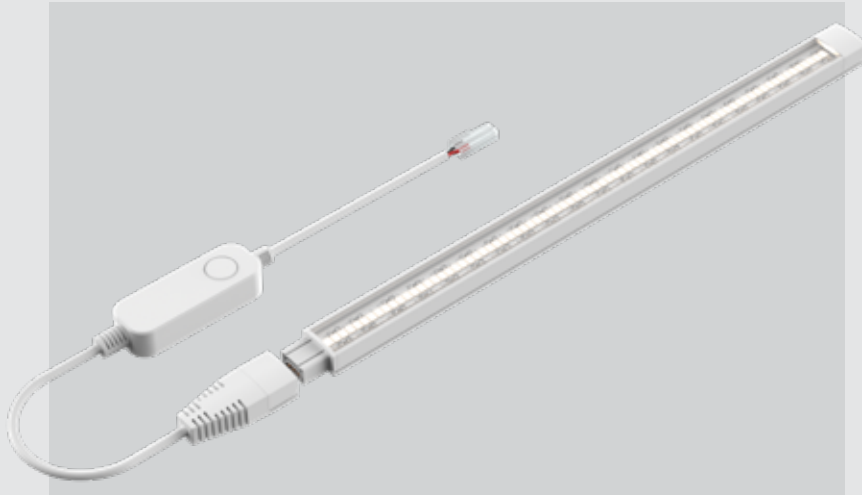

SWIVLED12-CC

*Add 12.5" for each additional unit

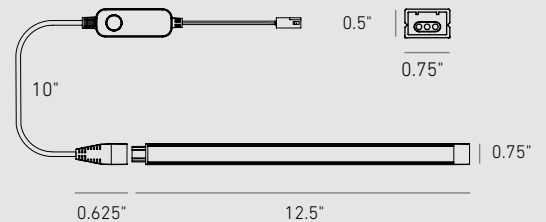

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SWIVLED12-CC	12.5"	3 W	300 lm	80	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	12 V

Specifications

10" (25 cm) power cord with CCT switch included
Switch-selectable CCT
Multiple fixtures can be linked together (Up to 8x SWIVLED in series)
5-year warranty

Note

Plug-in or hard-wired power supply required for installation. Sold separately.
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Finish

☐ **WH** White

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver
ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired


DD1260
LED driver and dimmer in one unit
BT06DIM-IC
6W dimmable LED hardwire driver
BT12DIM-IC
12W dimmable LED hardwire driver
BT24DIM-IC
24W dimmable LED hardwire driver
BT36DIM
36W dimmable LED hardwire driver
BT48DIM
48W dimmable LED hardwire driver

Accessories

SWIVLEDCC-EXT10
10" extension cord
SWIVLEDCC-EXT36
36" extension cord
SWIVLEDCC-EXT60
60" interconnection harness
SWIVLEDACC-45VCLIP
45 degree mounting brackets
SWIVLED-CC10-OUTPUT
10" extension cord with male/female connectors


SUPER-PUCK RECESSED

Enjoy energy-saving white light in a variety of attractive finishes. These LED pucks are well suited to accent and task lighting under cabinets and in other areas.

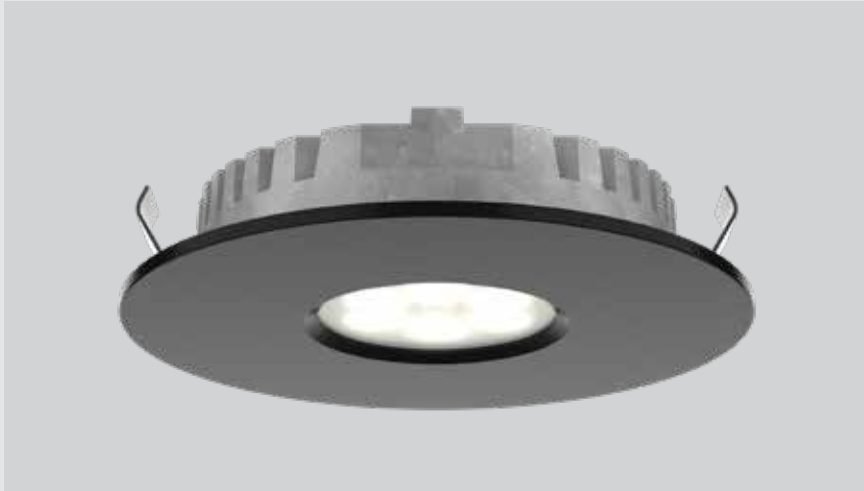


4001-CC

Ø2.375"



Ø2.625"



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
4001-CC	Ø2.625"	3 W	150 lm	90	2700, 3000, 3500, 4000, 5000 K	12 V

Specifications

12V DC LED driver required
12" input lead with quick connector
24" interconnection harness included
Switch-selectable CCT
Smooth 360° wide spread
5-year warranty

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver
ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired

DD1260
LED driver and dimmer in one unit
BT06DIM-IC
6W dimmable LED hardwire driver
BT12DIM-IC
12W dimmable LED hardwire driver
BT24DIM-IC
24W dimmable LED hardwire driver
BT36DIM
36W dimmable LED hardwire driver
BT48DIM
48W dimmable LED hardwire driver

Finish

● **BK** Black
● **GD** Gold
○ **SN** Satin Nickel
○ **WH** White

Accessories

4000-E24
24" extension cord
4000-E60
60" extension cord
4000HRNS-24
24" interconnection harness

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.


DUO-PUCK

These robust LED pucks, equipped with a frosted lens, deliver highly efficient punches of white light, making them well-suited for under-cabinet lighting and various other applications.





4005-CC

Ø2.375"



Ø2.625"



Ø3"

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
4005-CC	Ø2.625"	2 W	138 lm	80	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	12 V
*Per fixture						
K4005-CC	Ø2.625"	2 W*	138 lm*			

Specifications

12V DC LED driver required
12" input lead with quick connector
24" interconnection harness included
Can be recessed or surface mounted
Switch-selectable CCT
Smooth 360° wide spread
Kits available
5-year warranty

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver
ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired

DD1260
LED driver and dimmer in one unit
BT06DIM-IC
6W dimmable LED hardwire driver
BT12DIM-IC
12W dimmable LED hardwire driver
BT24DIM-IC
24W dimmable LED hardwire driver
BT36DIM
36W dimmable LED hardwire driver
BT48DIM
48W dimmable LED hardwire driver

Finish

● **BK** Black
○ **SN** Satin Nickel
○ **WH** White

Accessories

4000-E24
24" extension cord
4000-E60
60" extension cord
4000HRNS-24
24" interconnection harness

Note

Plug-in or hard-wired power supply required for installation. Sold separately.
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.



MINI-PUCK

Enjoy complete flexibility with our mini LED pucks. Feel free to recess, surface mount, or direct-wire these directional pucks to achieve your desired lighting effect.



LED RDM1

Ø1.75"



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LED RDM1	Ø2"	1.1 W	80 lm	80	3000 K	12 V

Specifications

12V DC LED driver required
12" input lead with quick connector
24" interconnection harness included
Smooth 360° wide spread
Can be recessed or surface mounted
Surface adapter included
Gimbal LED module
5-year warranty

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver
ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired

DD1260
LED driver and dimmer in one unit
BT06DIM-IC
6W dimmable LED hardwire driver
BT12DIM-IC
12W dimmable LED hardwire driver
BT24DIM-IC
24W dimmable LED hardwire driver
BT36DIM
36W dimmable LED hardwire driver
BT48DIM
48W dimmable LED hardwire driver

Finish

● **BK** Black
● **SBA** Sandblasted aluminum
● **WH** White

Accessories


4000-E24
24" extension cord
4000-E60
60" extension cord
4000HRNS-24
24" interconnection harness

Note

Plug-in or hard-wired power supply required for installation. Sold separately.
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ECO-PUCK

The sleek design of this LED puck makes it the ideal choice for cabinet and kitchen lighting applications. It can be dimmed to create just the right ambiance for your decor.

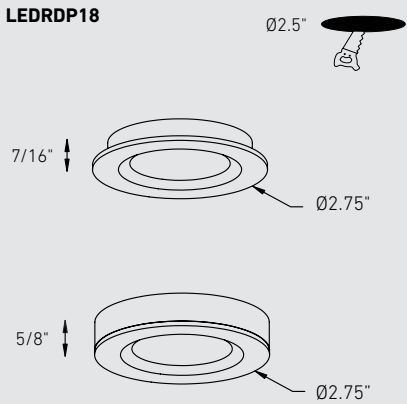

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDRDP18	Ø2.75"	1.7 W	100 lm	80	3000 K	12 V

Specifications

12V DC LED driver required
12" input lead with quick connector
24" interconnection harness included
Recessed or surface mounted installation
Surface adapter included
Smooth 360° wide spread
5-year warranty

Power supplies: plug-in

ETR-LED10WPI
12V DC/10W class 2 LED driver
ETR-LED24WPI
12V DC/24W class 2 LED driver

Power supplies: hard-wired

DD1260
LED driver and dimmer in one unit
BT06DIM-IC
6W dimmable LED hardwire driver
BT12DIM-IC
12W dimmable LED hardwire driver
BT24DIM-IC
24W dimmable LED hardwire driver
BT36DIM
36W dimmable LED hardwire driver
BT48DIM
48W dimmable LED hardwire driver

Finish

☐ **WH** White

Accessories


4000-E24
24" extension cord
4000-E60
60" extension cord
4000HRNS-24
24" interconnection harness

Note


Plug-in or hard-wired power supply required for installation. Sold separately.
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SLIDE

Replace your 12V driver with this 12V dimmer switch with an integrated driver to control the brightness of your low voltage lights. Connect this unit to your 120V input current, and all your lights will dim to a nice, soft glow.

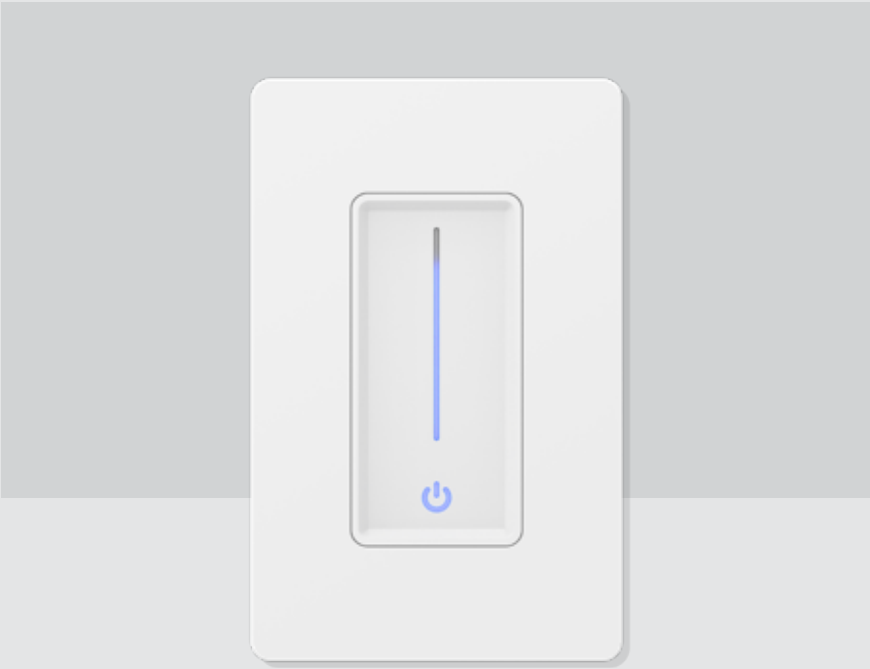

DD1260

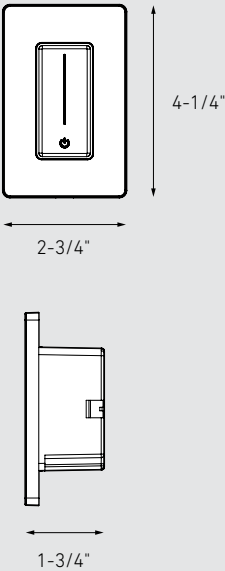

Model	Size	Dimmer	Switch	Minimum load	Maximum load	Input voltage	Output voltage
DD1260	4-1/4"	✓	✓	5 W	60 W	120 VAC	12 VDC

Specifications

LED driver and dimmer in one unit
Indoor use only
Input: 120 VAC ~ 1.0 A, 60 Hz
Dimming range: 100% - 10%
Dimming type: TRIAC edge cut
Fits in a standard electrical box
Single pole
Works with all dimmable 12V lights
5-year warranty

Finish

☐ **WH** White


Note

Does not work with Dals smart lights.
Requires a neutral wire. Works in a single-pole setup only.

NEW

24V COB TAPE

Our 24V COB tape light with 5CCT adjustability delivers a smooth, dot-free glow, five versatile color temperature options, and minimized voltage drop for consistent performance in any space or ambiance.

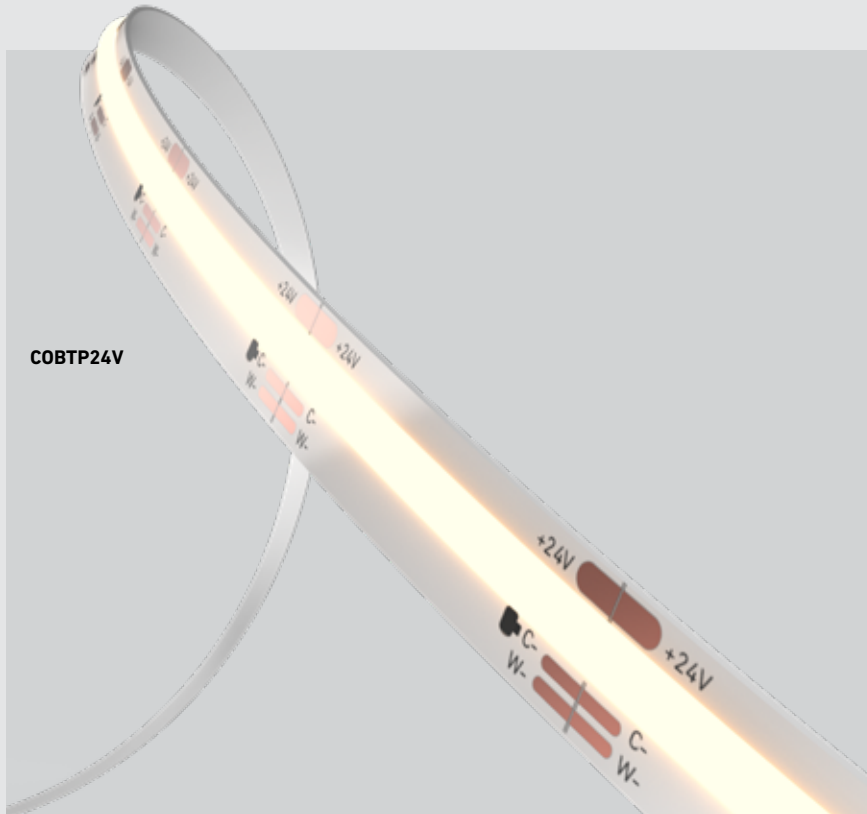

COLOR TEMPERATURE



DRY




VOLTAGE



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
COBTP24V-K10FT-CC	10' (3m)	18 W	1590 lm	90	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	24 V
COBTP24V-K20FT-CC	20' (6m)	36 W	3180 lm			
COBTP24V-R50FT-CC*	50' (15m)	1.8 W /foot	160 lm /foot			
COBTP24V-R100FT-CC*	100' (30m)	1.8 W /foot	160 lm /foot			

*50m and 100m 24V COB reels do not include a driver.
Plug-in or hard-wired power supply required for installation. Sold separately.

COBTP24V-K10FT-CC	1 x 10' (3m) kit
COBTP24V-K20FT-CC	1 x 20' (6m) kit
COBTP24V-R50FT-CC	1 x 50' (15m)
Reel only, driver not included	
COBTP24V-R100FT-CC	1 x 100' (30m)
Reel only, driver not included	

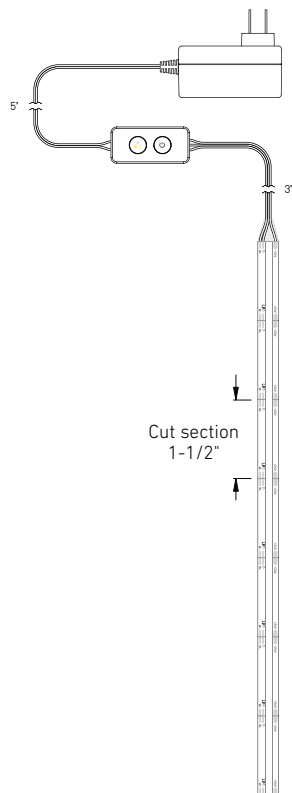

Specifications

24V DC LED plug-in driver included for 10- and 20-foot kits only (10 feet = 30W / 20 feet = 60W)

Seamless light emission (190 LEDs/foot)

Includes a wired remote with selectable CCT and on/off functionality for 10- and 20-foot kits only

Quick-connect assembly for easy installation

Self adhesive

Can be cut at every cut mark (every 1-1/2")

Maximum run of 40 feet

5-year warranty

Power supplies: plug-in

COBTP24V-ETR30
24V DC/30W class 2 LED driver

COBTP24V-ETR60
24V DC/60W class 2 LED driver

Power supplies: hard-wired

DR2412DIM
12W 24V dimmable hardwired driver

DR2424DIM
24W 24V dimmable hardwired driver

DR2448DIM
48W 24V dimmable hardwired driver

DR2460DIM
60W 24V dimmable hardwired driver

DR2496DIM
96W 24V dimmable hardwired driver

Accessories

COBTP24V-ACCI
I-shaped connector (strip-to-strip)

COBTP24V-ACCL
L-shaped connector (strip-to-strip)

COBTP24V-EXT24
24" extension cable

COBTP24V-EXT60
60" extension cable

COBTP24V-EXT120
120" extension cable

COBTP24V-CC36
36" extension cable (strip-to-controller)

COBTP24V-SWT
CCT controller with on/off functionality


COBTP-ALXT-L5M-BK
5 meter black lens for extrusions

COBTP-ALXT-L5M-WH
5 meter white lens for extrusions

POWERLED PUCK



Simplifying life for our customers is always a priority for us. With a direct 120V driverless connection, we have achieved our goal with our PowerLED pucks.

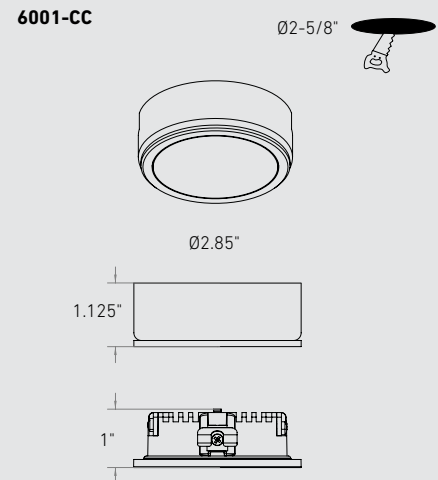

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
6001-CC	Ø2.875"	4 W	235 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

Specifications

12" input and output lead with quick connector
 Can be hardwired to a junction box
 Can be interconnected
 Switch-selectable CCT
 Recessed or surface mounted installation
 Surface adapter included
 Smooth 360° wide spread
 Aluminum construction
 5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

Accessories

- 6000-JB**
Junction box for 120 V series with one 12" extension cord
- 6001-PC**
72" power cord
- 6001-E24**
24" extension cord
- 6001-E60**
60" extension cord

Note

Junction box model 6000-JB or power cord model 6001-PC are required for installation. Sold separately.

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


POWERLED LINEAR




Long runs and flexibility are the primary features of our smooth PowerLED linears. A sleek, driverless connection ensures smooth and continuous light in every application.




6009CC




6012CC




6024CC



6036CC



6048CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
6009CC	9"	3 W	250 lm	80	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	120 V
6012CC	12"	4 W	330 lm			
6024CC	24"	8 W	675 lm			
6036CC	36"	12 W	1080 lm			
6048CC	48"	16 W	1300 lm			

Specifications

Switch-selectable CCT
Dimmable with regular low-voltage electronic dimmers
Smooth linear wide spread
Multiple fixtures can be linked together (up to 200W)
5-year warranty

Finish

● **SBA** Sandblasted aluminum

Note

Junction box model 6000-JB or power cord model 6000-ACCPC are required for installation. Sold separately.

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

Accessories

6000-ACCE06
6" extension cord

6000-ACCE24
24" extension cord

6000-ACCE60
60" extension cord

6000-ACCLR
Kit of left and right L connectors

6000-ACCPC
6' power cord

6000-JB
Junction box

PROLED LINEAR

Everyone loves simplicity. That is exactly what you get when ordering this linear design. All accessories are included, and the ease of installation make it the right choice for your project.



3000k


COLOR TEMPERATURE



DAMP


VOLTAGE



Intertek


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
HLF09-3K	9"	3 W	200 lm	90	3000 K	120 V
HLF12-3K	12"	4 W	380 lm			
HLF18-3K	18"	8 W	675 lm			
HLF24-3K	24"	12 W	900 lm			
HLF30-3K	30"	16 W	1100 lm			

HLF09

HLF12

HLF18

HLF24

HLF30

Specifications

120 V direct connection or plug-in
Dimmable with regular low-voltage
electronic dimmers
Interconnectable
Robust construction

Note

Other color temperatures, finishes, and
voltage options are available but may require
minimum order quantities (MOQs) and
longer lead times. Please contact your DALI
representative for more information.

Finish


☐ **WH** White

Accessories

9000-ACCE24
24" extension cord
9000-ACCE72
72" extension cord


COUNTERLED LINEAR


When designing a linear, we always want our customers to have flexibility at their fingertips. This has become a reality with our CCT linear, as the toggle switch gives you the ability to choose between three color temperatures.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
9009CC-WH*	9"	3.5 W	200 lm	90	2700 K/ 3000 K/ 4000 K	120 V
9012CC-WH	12"	4 W	335 lm		2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	
9018CC-WH	18"	8 W	560 lm			
9024CC-WH	24"	12 W	850 lm			
9030CC-WH	30"	16 W	1115 lm			


*Model 9009CC is plug-in only and comes with three selectable CCTs: 2700K, 3000K, 4000K

9009CC-WH

9012CC-WH

9018CC-WH

9024CC-WH

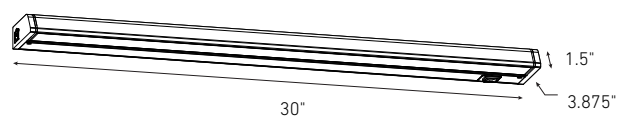9030CC-WH

Specifications

Switch-selectable CCT
120 V direct connection or plug-in*
Dimmable with regular low-voltage electronic dimmers
Interconnectable
5-year warranty

Finish

○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

9000-ACCE24
24" extension cord
9000-ACCE72
72" extension cord

LED DIMMABLE DRIVERS

Dimming is seamlessly integrated with our LED Dimmable Driver series, enabling precise control over light output. These drivers allow for optimal adjustment, ensuring the ideal lighting level based on the time of day and usage requirements of your fixtures.



DAMP



VOLTAGE




VOLTAGE


IC*
RATED







Model	Watts	Input voltage	Output voltage	Model	Watts	Input voltage	Output voltage
BT06DIM-IC*	6 W	100VAC-230VAC, 50/60Hz	12 VDC	DR2412DIM	12 W	100VAC-230VAC, 50/60Hz	24 VDC
BT12DIM-IC*	12 W			DR2424DIM	24 W		
BT24DIM-IC*	24 W			DR2448DIM	48 W		
BT36DIM	36 W			DR2460DIM	60 W		
BT48DIM	48 W			DR2496DIM	96 W		



*IC rated

BT06DIM-IC / BT12DIM-IC

BT24DIM-IC / BT36DIM / BT48DIM

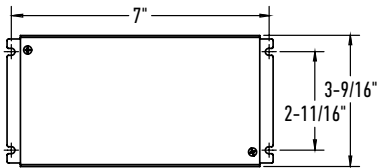DR2412DIM / DR2424DIM / DR2448DIM

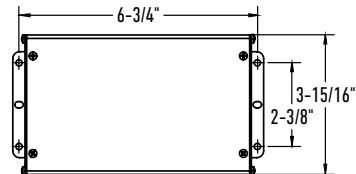DR2460DIM

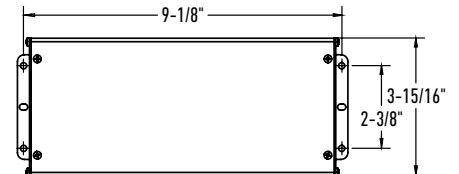DR2496DIM

12V Specifications

Constant voltage mode power supply
AC-dimming supply
(with TRIAC or ELV dimmer)
Protection: short circuit / Over voltage
Integrated junction box for
hard-wire installation
Fully isolated metal case -
Cooling by air convection
Optimal dimming when used at 50%
or more of total load
Load Range: 50% to 100%
Operating temperature: -30°C to 45°C
5-year warranty

24V Specifications









Constant voltage mode power supply
DC-dimming supply
(with TRIAC or ELV dimmer)
Protection: short circuit / Over voltage
Integrated junction box for
hard-wire installation
Fully isolated metal case -
Cooling by air convection
Optimal dimming when used at 50%
or more of total load
Load Range: 50% to 100%
5-year warranty

Finish













- **BK** Black (24V models)
- **WH** White (12V models)

ACCESSORIES

12V GENERAL ACCESSORIES











Title		Model	Finish	Specification
LED EXTENSION ACCESSORY  <small>DRY</small>		4000-E24	Black	<ul style="list-style-type: none"> • 24" extension cord for 12 V LED products • Quick-connect installation
LED EXTENSION ACCESSORY  <small>DRY</small>		4000-E60	Black	<ul style="list-style-type: none"> • 60" extension cord for 12 V LED products • Quick-connect installation
LED HARNESS ACCESSORY  <small>DRY</small>		4000HRNS-24	Black	<ul style="list-style-type: none"> • 24" interconnection harness for 12 V LED products • Quick-connect installation
LED HARNESS ACCESSORY  <small>DRY</small>		LEDHRNS-6	Black	<ul style="list-style-type: none"> • 24" 6 direction interconnection harness for 12 V LED products • Quick-connect installation

12V 3000K COB-TAPE ACCESSORIES





















		Model	Finish	Specifications
EXTRUSIONS 		COBTP-ALXT-BK COBTP-ALXT-WH	Black White	<ul style="list-style-type: none"> • 1 meter black aluminum extrusion with black lens • 1 meter white aluminum extrusion with white lens
EXTRUSIONS 		COBTP-ALXT-L5M-BK COBTP-ALXT-L5M-WH	Black White	<ul style="list-style-type: none"> • 5 meter roll of black aluminum extrusion with black lens • 5 meter roll of white aluminum extrusion with white lens
COB-TAPE EXTENSION CORD 		COBTP-CC06	White	<ul style="list-style-type: none"> • 6 in. connection cord for hard-wired driver installation for COB tape
COB-TAPE EXTENSION CORD 		COBTP-EXT02	White	<ul style="list-style-type: none"> • 2 in. extension cord with reconnect connectors for COB tape
COB-TAPE EXTENSION CORD 		COBTP-EXT24	White	<ul style="list-style-type: none"> • 24 in. extension cord with reconnect connectors for COB tape
COB-TAPE EXTENSION CORD 		COBTP-EXT60	White	<ul style="list-style-type: none"> • 60 in. extension cord with reconnect connectors for COB tape

ACCESSORIES

12V SWIVLED ACCESSORIES









		Model	Finish	Specifications
SWIVLED EXTENSION CORD  <small>DRY</small>	 10"	SWIVLEDCC-EXT10	White	<ul style="list-style-type: none"> • 10" extension cord for SwivLED series • One end with male connector and one end with female connector • Can be connected together • Quick-connect installation
SWIVLED EXTENSION CORD  <small>DRY</small>	 36"	SWIVLEDCC-EXT36	White	<ul style="list-style-type: none"> • 36" extension cord for SwivLED series strips • One end with male connector and one end with female connector • Can be connected together • Quick-connect installation
SWIVLED EXTENSION CORD  <small>DRY</small>	 60"	SWIVLEDCC-EXT60	White	<ul style="list-style-type: none"> • 60" extension cord for SwivLED series strips • One end with male connector and one end with female connector • Can be connected together • Quick-connect installation
SWIVLED MOUNTING BRACKETS  <small>DRY</small>		SWIVLEDACC-45VCLIP	Chrome	<ul style="list-style-type: none"> • 45 Degree Brackets for SwivLED Series
SWIVLED CONNECTION ACCESSORY  <small>DRY</small>	 10"	SWIVLED-CC10-OUTPUT	White	<ul style="list-style-type: none"> • 10" extension cord for SwivLED series • One end with male connector and one end with female connector • Can be connected together • Quick-connect installation

24V 5CCT COB-TAPE ACCESSORIES

















		Model	Finish	Specifications
EXTRUSIONS 		COBTP-ALXT-BK COBTP-ALXT-WH	Black White	<ul style="list-style-type: none"> • 1 meter black aluminum extrusion with black lens • 1 meter white aluminum extrusion with white lens
30W 24V COB-TAPE PLUG-IN DRIVER 		COBTP24V-ETR30	White	<ul style="list-style-type: none"> • 30W Plug-in driver for 24V COB tape
60W 24V COB-TAPE PLUG-IN DRIVER 		COBTP24V-ETR60	White	<ul style="list-style-type: none"> • 60W Plug-in driver for 24V COB tape
COB-TAPE I-CONNECTOR 		COBTP24V-ACCI	White	<ul style="list-style-type: none"> • I-shaped connector (strip-to-strip)
COB-TAPE L-CONNECTOR 		COBTP24V-ACCL	White	<ul style="list-style-type: none"> • L-shaped connector (strip-to-strip)
COB-TAPE EXTENSION CABLE 		COBTP24V-EXT24	White	<ul style="list-style-type: none"> • 24" extension cable
COB-TAPE EXTENSION CABLE 		COBTP24V-EXT60	White	<ul style="list-style-type: none"> • 60" extension cable
COB-TAPE EXTENSION CABLE 		COBTP24V-EXT120	White	<ul style="list-style-type: none"> • 120" extension cable
COB-TAPE CABLE FOR CONTROLLER 		COBTP24V-CC36	White	<ul style="list-style-type: none"> • 36" extension cable (strip-to-controller)
COB-TAPE CCT CONTROLLER 		COBTP24V-SWT	White	<ul style="list-style-type: none"> • CCT controller

120V ACCESSORIES

120V POWERLED PUCK ACCESSORIES

Model		Compatibility	Finish	Specification
6000-JB  DRY		6001	White	<ul style="list-style-type: none"> • Hardwire junction box for PowerLed pucks and linears series • Quick-connect installation • Allows hard-wired 120V setup
6001-PC  DRY		6001	White	<ul style="list-style-type: none"> • 72" power cord for PowerLed pucks • On/off switch on cord • Quick-connect installation • Plug-in version
6001-E24  DRY		6001	White	<ul style="list-style-type: none"> • 24" extension cord for PowerLed pucks series • One end with male connector and one end with female connector • Quick-connect installation
6001-E60  DRY		6001	White	<ul style="list-style-type: none"> • 60" extension cord for PowerLed pucks series • One end with male connector and one end with female connector • Quick-connect installation

120V LINEAR ACCESSORIES

Model		Compatibility	Finish	Specification
6000-JB 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • Hardwire junction box for PowerLED pucks and linears series • Quick-connect installation • Allows hard-wired 120V setup
6000-ACCPC 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • 72" power cord for PowerLED linear series • On/off switch on cord • Quick-connect installation • Plug-in version
6000-ACCE06 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • 6" extension cord for PowerLED linear series • One end with male connector and one end with female connector • Quick-connect installation
6000-ACCE24 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • 24" extension cord for PowerLED linear series • One end with male connector and one end with female connector • Quick-connect installation
6000-ACCE60 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • 60" extension cord for PowerLED linear series • One end with male connector and one end with female connector • Quick-connect installation
6000-ACCLR 		6009CC 6012CC 6024CC 6036CC 6048CC	White	<ul style="list-style-type: none"> • Kit of left and right L connectors
9000-ACCE24 		9009CC HLF09 9012CC HLF12 9018CC HLF18 9024CC HLF24 9030CC HLF30	White	<ul style="list-style-type: none"> • 24" extension cord for 9000 and HLF linear series • One end with male connector and one end with female connector • Quick-connect installation
9000-ACCE72 		9009CC HLF09 9012CC HLF12 9018CC HLF18 9024CC HLF24 9030CC HLF30	White	<ul style="list-style-type: none"> • 72" extension cord for 9000 and HLF linear series • One end with male connector and one end with female connector • Quick-connect installation





FORMS




118
NAPA
NAPF20-CC



120
IRIS
IRPD-CC



122
QUARTET
CAPD72-CC



124
BOULEVARD PENDANT
LNPD48-CC
LNPDSC48-CC



126
PINPOINT
MSLPD48-CC



128
BEAM
SPD48-CC
SPD72-CC



132
CURRENT
SLPD60-CC



134
SWAY ONE
W1PD48-CC



134
SWAY THREE
W3PD36-CC



136
SPIN
BRPD40-CC



136
SPIN
BRPD18-CC



138
OLYMPIA FIVE
RRPD5-CC



138
OLYMPIA TWO
RRPD2-CC




140
HELIX
SPR20-CC
SPR34-CC



142
TWIST
TWPS-3K



144
TWIRL
TWPD-CC



146
ATOM PENDANT
FPD60-CC



146
ATOM ONE
FPD-CC



146
ATOM THREE
FPDC3-CC



148
CIRCA
RGPD24-CC



150
ECLIPSE
PDR14-CC



152
PYRA
TRPD34-CC



154
DROP
CFPD20-CC



158
ASTERISK
SSPD32-CC



160
STELLAR PENDANT
STRPD-3K



164
NOVA
PDC18-CC



166
CHANNEL PENDANT
PDLED120-
24/36 /48/60
5/5SQ/8/8SQ



124
BOULEVARD FLUSH
MOUNT
LNFM48-CC



168
FOCUS
CYL05-CC
CYL06-CC-V



118

NAPA
NAPF20-CC



146

ATOM
FDB-CC



158

ASTERISK FLUSH MOUNT
SSF20-CC



160

STELLAR FLUSH MOUNT
STRFM-3K



134

SWAY FLUSH MOUNT
W3FM-CC



170

HOVER
CCFM-CC



172

NEWTON
FMT18-CC



152

PYRA FLUSH MOUNT
TRFM22-CC



174

MISTY
FUZ11-CC



176

AURORA
CFH12-CC



178

ORA
CFG13-C



180

FUSION
TLFM12-CC
TLFM21-CC



182

DELTA
CFLEDR 6/10/14/18/24-CC
CFLED SQ6/10/14-CC



186

RADIANCE
FMM09-CC
FMM12-CC



188

PRIME
FMP05-CC
FMP05M-CC
FMP09/12-CC



190

SHIFT
VA032-CC
VA024-CC



192

LEDGE
VAL24-CC
VAL36-CC



194

BALANCE
VCC24-CC
VCC36-CC



136

SPIN SCONCE
BRV24-CC
BRV36-CC



196

LIGHTNING
VDL40-CC



198

ARIA
VSW24-CC
VSW36-CC



200

NOBLE ONE
LEDVAN001-CC-18
LEDVAN001-CC-24



202

NOBLE TWO
LEDVAN002-CC-24
LEDVAN002-CC-36



204

LYRA
LEDVAN003-CC-24
LEDVAN003-CC-32



206

PORTRAIT
VLG24-CC
VLG36-CC



160

STELLAR
STK21-CC
STK37-CC



208

GEMINI
SWS24-CC
SWS36-CC
SWS48-CC
SWS60-CC



210

MIDNIGHT
RWS24-CC
RWS48-CC
RWS60-CC



214

PROFILE
LWJ08-CC
LWJ16-CC
LWJ24-CC



126

PINPOINT WALL
MSLWALL-CC



216

ADEN
LEDWALL-A



218

BROOKLYN
LEDWALL-B



220

EDINBURGH
LEDWALL-E



222

SHIELD
DSWC05-CC
DSWC07-CC-V



224

GENEVA
LEDWALL-G-CC



226

HARLOW
LEDWALL-H



228

ALTO
SQS06/10/15



230

CUBIX
LEDWALL001D



232

RISE
LSTP12-CC



228

ALTO STEP LIGHT
SQSTP-CC



234

ECHO
LEDSTEP002D-CC



236

PEARL
LEDSTEP004D-CC



238

CAMBER
LEDSTEP005D-CC



240

ASCEND
LSTP07-CC



250

GLAM
RTL-3C



160

STELLAR FLOOR
STRFL-3K



242

ACCESSORIES



NEW

NAPA

The versatile Napa fixture features a timeless dome-shaped design and the flexibility to be mounted as either a pendant or a sleek ceiling flush mount. Its unique internal dome lens hides the light source, delivering a soft, gradient glow without glare.



COLOR TEMPERATURE



DAMP



LOW-GLARE

**T24
JA8**

CERTIFIED



NAPF20-CC

Quick-Connect


Pendant with Quick-Connect stems for effortless installation. No wires—just screw in the desired length directly to the canopy.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
NAPF20-CC	20"	40 W	1825 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V



NAPF20-CC

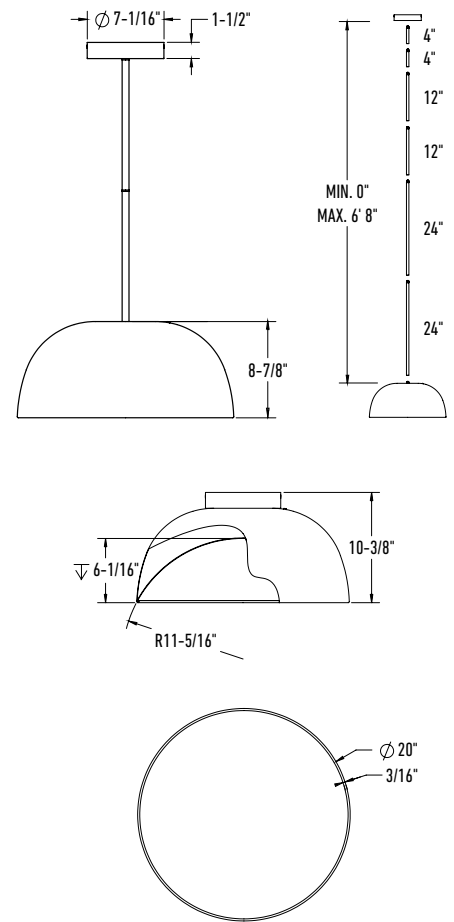

Specifications

Can be mounted as either a pendant or a ceiling flush mount
 Unique internal dome lens hides the light source, delivering a soft, gradient glow.
 Adjustable height up to 6'-8" with quick connect stems
 Switch-selectable CCT
 Integrated dimmable driver
 Canopy mount on 4" octagon junction box
 5-year warranty

Finish

- **BK** Black
- **WH** White


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

IRIS

Add a touch of elegance to any room with our 9-inch Iris pendant, featuring a sleek glass dome and the innovative Gravity Glide feature for effortless height adjustment. Available in multiple finishes, it's perfect for creating a sophisticated ambiance at home or in any professional setting.



DRY




GRAVITY GLIDE



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
IRPD-CC	9"	12 W	760 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

IRPD-CC

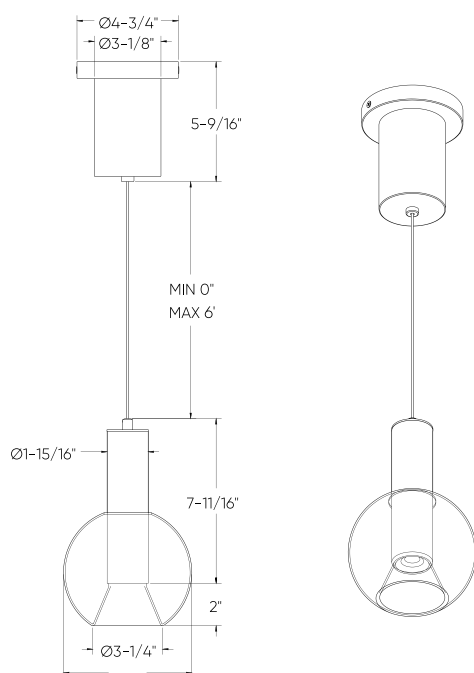

Specifications

Adjustable height up to 6 feet
Gravity Glide height adjustment allows you to effortlessly adjust the height of a pendant lamp by simply pulling or pushing the cord.
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish

- **BK** Black
- **GD** Gold
- **WH** White


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


NEW

QUARTET

Explore the sophisticated design and versatile functionality of our Quartet pendant, featuring swiveling heads that efficiently direct light in both residential and commercial environments.



CAPD72-CC

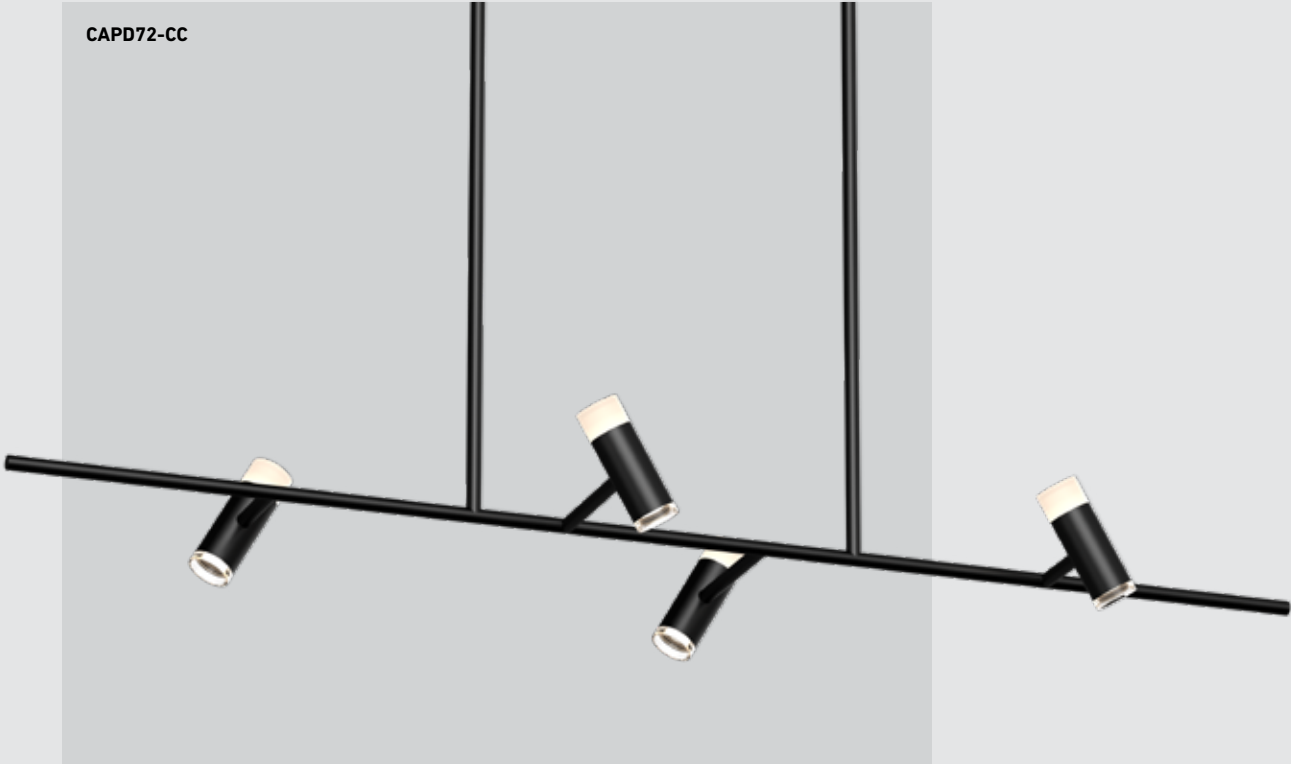

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CAPD72-CC	72"	30 W	2400 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V



Specifications

Four 1/4-inch and four 1-1/2-inch interchangeable lenses included
Adjustable height up to 6.5 (36", 24", 12" and 6" stems)
Includes 4 swiveling heads
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish

● **BK** Black

Accessories


CAPD-ACCLL

Kit of 4 long lenses (1/4-inch)

CAPD-ACCLS

Kit of 4 short lenses (1-1/2-inch)

CAPD72-CC

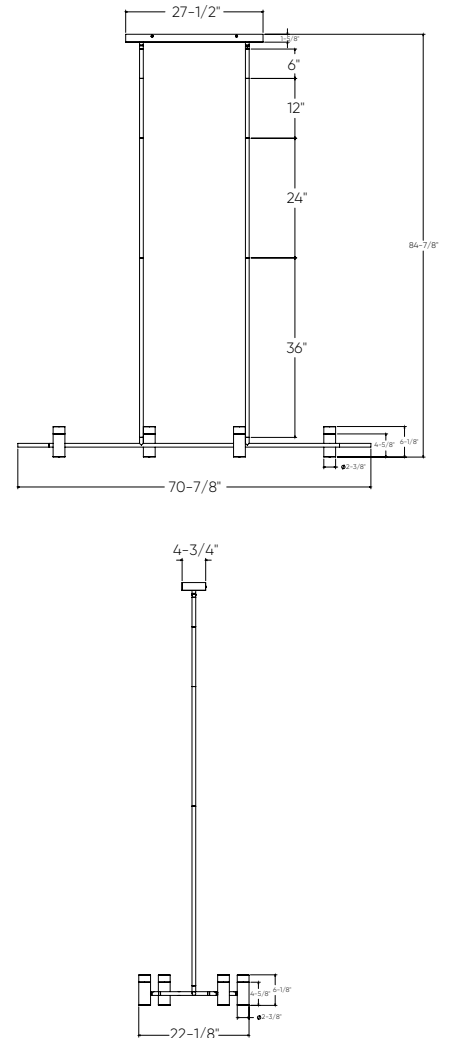


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.




NEW

BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.




**T24
JA8**
CERTIFIED

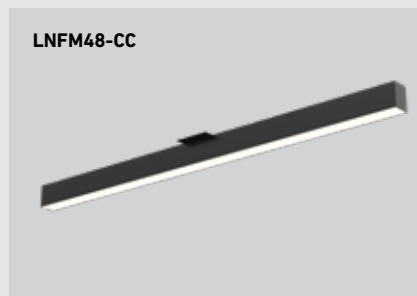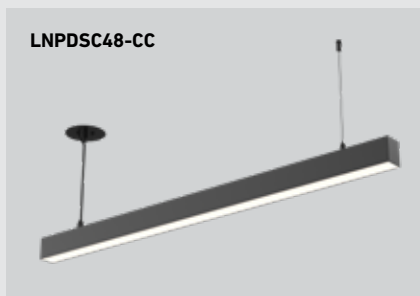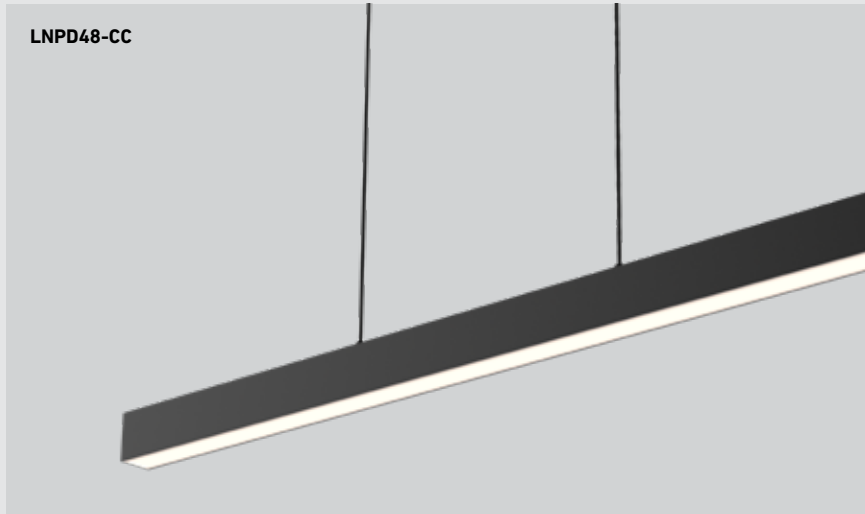


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
LNP48-CC	48"	40 W	2805 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LNP48-CC	48"	40 W	2805 lm			or
LNF48-CC	48"	40 W	3000 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)


LNP48-CC

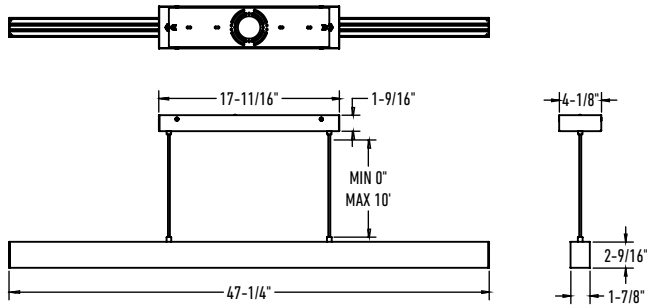

LNFM48-CC

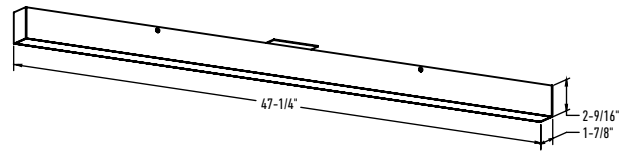

LNP48-CC

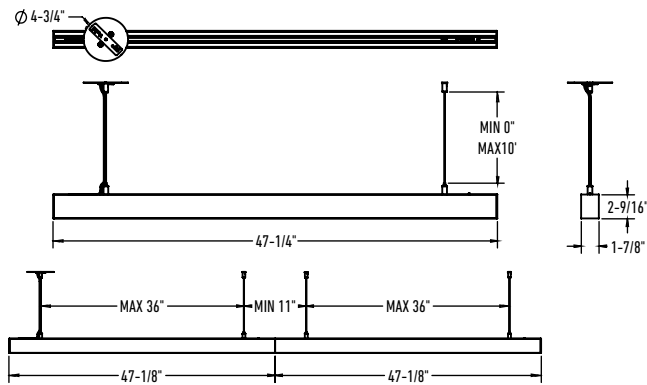

More from this family



LNR24-CC
pg. 50



LNR48-CC
pg. 50

Specifications

Switch-selectable CCT
Unique 20% up/ 80% down light output
(LNP48-CC, LNP48-CC only)
Multiple fixtures can be linked together
LNFM48 can be mounted on 4" octagon
junction box or directly on the ceiling
Adjustable height up to 10 feet
Aluminum housing which serves as a
highly efficient heat sink
Integrated dimmable driver
Canopy mount on 4" octagonal
junction box
5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

LNACC-L16FT

16-foot lens for Boulevard series pendants,
flush mounts and recessed linears

Multi-voltage (V) ⚡




This product family offers multi-voltage
drivers (120/277/347) that are dimmable
using 0-10V dimming systems. Please
note that longer lead times may apply for
this option. Kindly reach out to your DALI
representative for additional information and
to confirm availability.

Note

Other color temperatures, finishes, and
voltage options are available but may require
minimum order quantities (MOQs) and
longer lead times. Please contact your DALI
representative for more information.

PINPOINT

The MSL series, with its sleek glossy piano-black reflector, combines contemporary design with functionality, making it the ideal choice for any space

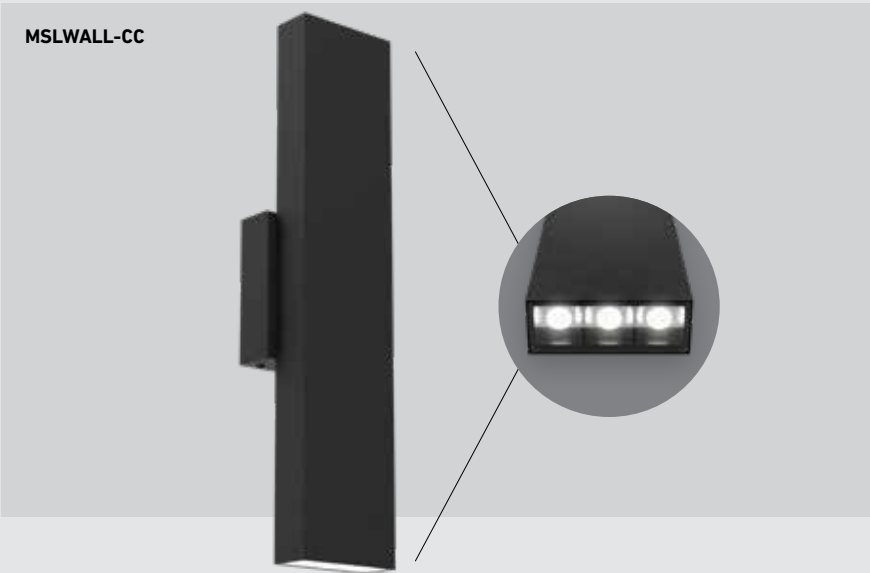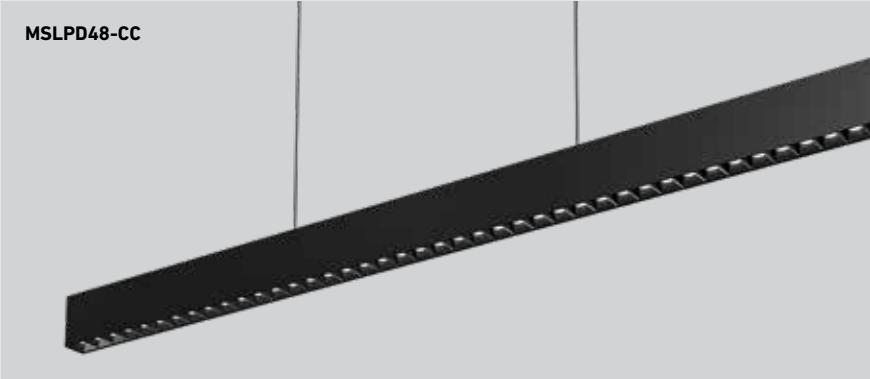


ADA
COMPLIANT **




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
MSLPD48-CC*	48"	40 W	2710 lm	90	2700, 3000, 3500,	120 V
MSLWALL-CC**	18"	15 W	760 lm		4000, 5000 K	

MSLPD48-CC

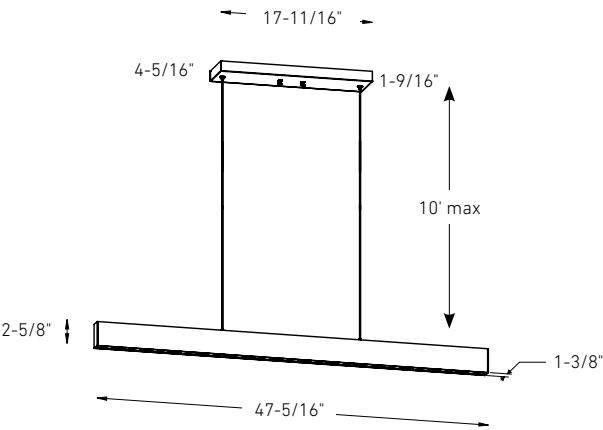

MSLWALL-CC

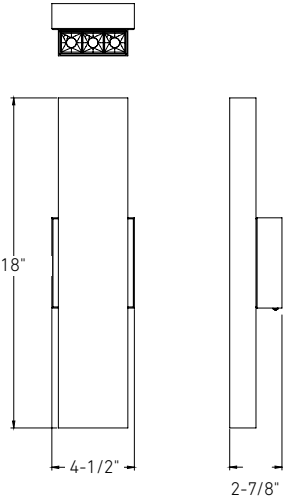

Specifications

Adjustable height up to 10 feet
(MSLPD48-CC only)
Aluminum housing
Switch-selectable CCT
30° beam angle
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

More from this family



MSL1
pg. 44



MSL2
pg. 44



MSL4
pg. 44



MSL5
pg. 44



MSL5G
pg. 44



MSL10
pg. 44





MSL10G
pg. 44

Finish

● **BK** Black


BEAM

This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.

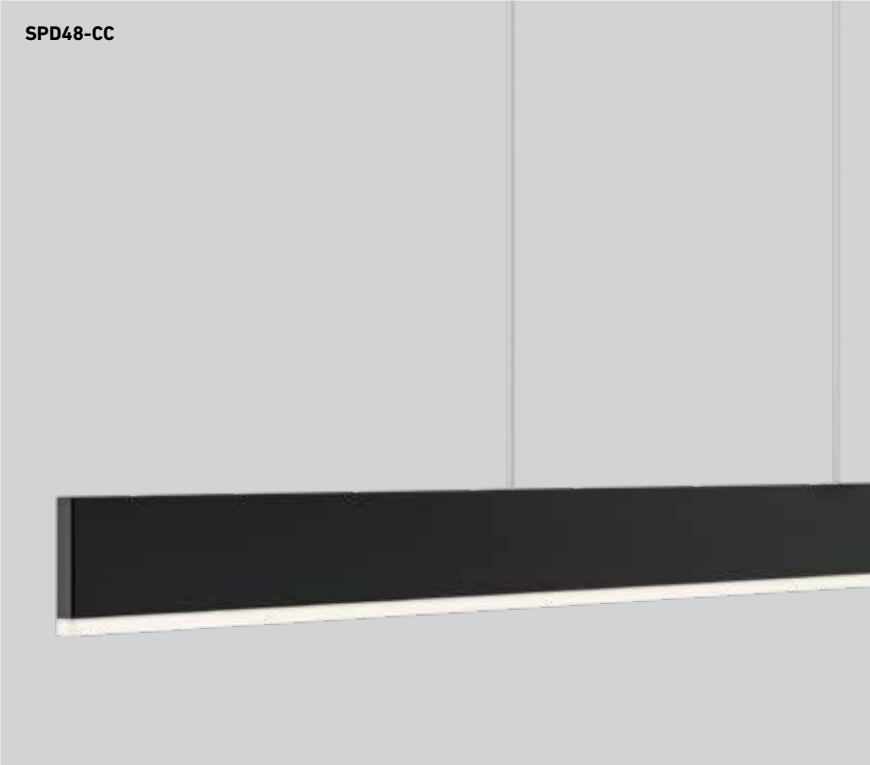


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SPD48-CC	48"	27 W	1530 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
SPD72-CC	72"	54 W	2300 lm			

SPD48-CC

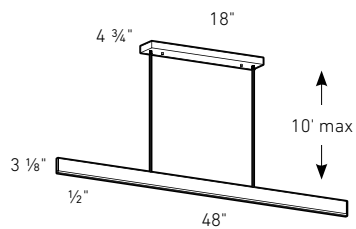

SPD72-CC

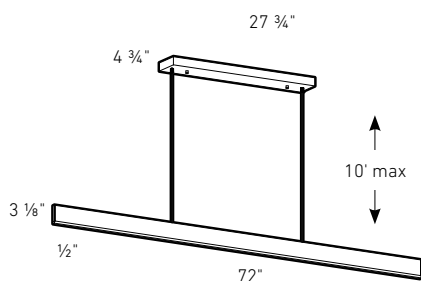

Specifications

Adjustable cable length up to 10 feet
Switch-selectable CCT
Frosted lens
Aluminum die-cast housing which serves as a highly efficient heat sink
Integrated dimmable driver
5-year warranty

Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

More from this family




SWS24-CC
SWS36-CC
SWS48-CC
SWS60-CC
pg. 208





CURRENT


Elevate your space with this sleek luminary, meticulously crafted to blend seamlessly into contemporary interiors. Its minimalist profile, characterized by a slender silhouette and unobtrusive design, not only illuminates your surroundings with a soft and uniform glow but also serves as a striking aesthetic statement.



DAMP



SLPD60-CC

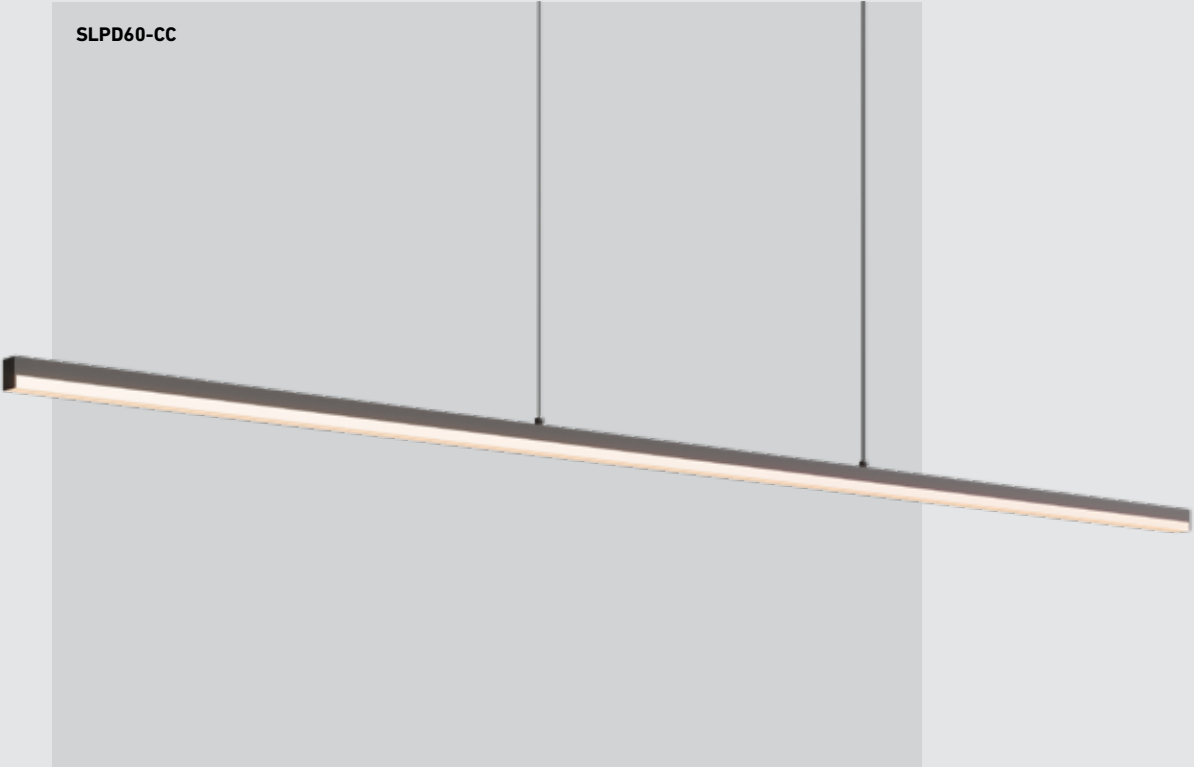

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SLPD60-CC	60"	32 W	2140 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V



Specifications

Adjustable height up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty


Finish

- **BK** Black
- **GD** Gold
- **WH** White

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SLPD60-CC

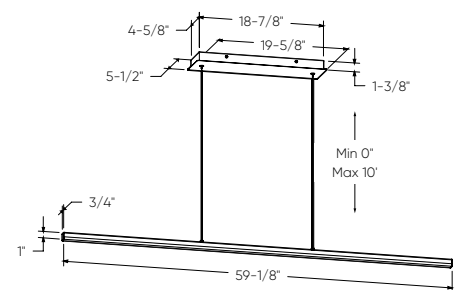

SWAY


Introducing our cutting-edge, ultra-slim curved linear LED pendant and flush mount lights—an embodiment of sophistication and modernity in lighting design




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
W1PD48-CC	48"	24 W	1330 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
W3PD36-CC	36"	31 W	1590 lm			
W3FM-CC	20"	20 W	880 lm			




W1PD48-CC

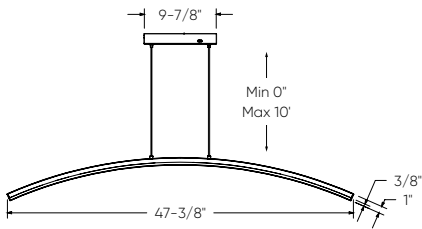

W3PD36-CC

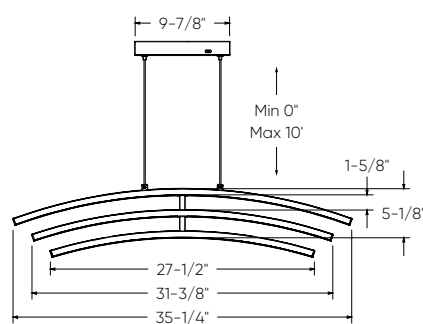

W3FM-CC

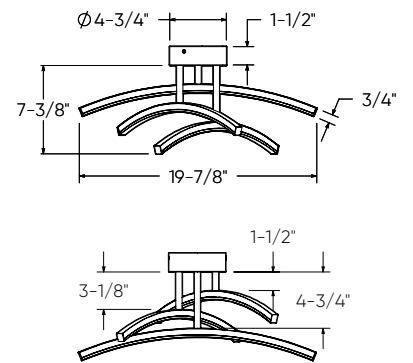

Specifications

Adjustable height up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish


● **BK** Black
● **GD** Gold

Note





Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SPIN

Illuminate your space with style, efficiency, and a touch of architectural brilliance with the Spin LED series



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
BRPD40-CC*	40"	41 W	2410 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
BRPD18-CC*	18"	15 W	880 lm			
BRV24-CC**	24"	15 W	880 lm			
BRV36-CC**	36"	22 W	1490 lm			

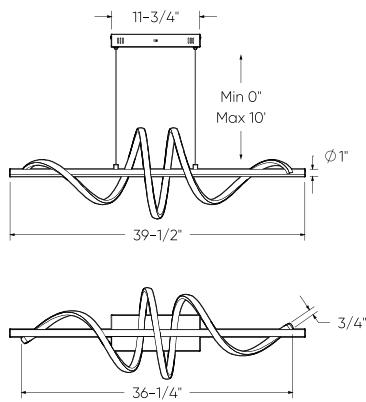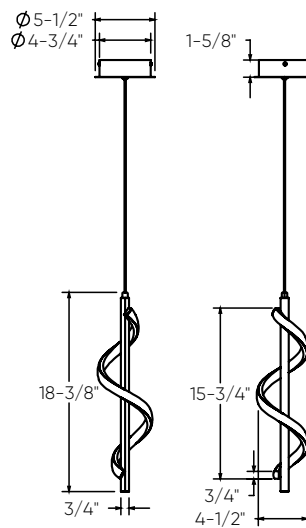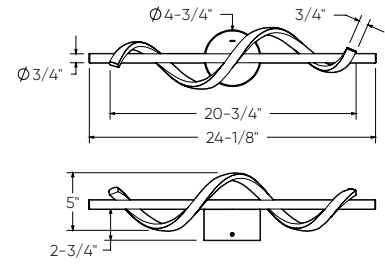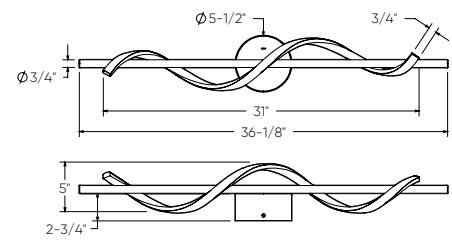BRPD40-CC**BRPD18-CC****BRV24-CC****BRV36-CC****Specifications**

Pendant height adjustable up to 10 feet
 Switch-selectable CCT
 Integrated dimmable driver
 Canopy mount on 4" octagon
 junction box
 5-year warranty

Finish



● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


OLYMPIA

A statement lamp with a lot of character. With its 5 adjustable rings, this linear pendant emits a bright light that makes it perfect for use as a primary light source over a kitchen counter, dining table, or even in a bar setting.

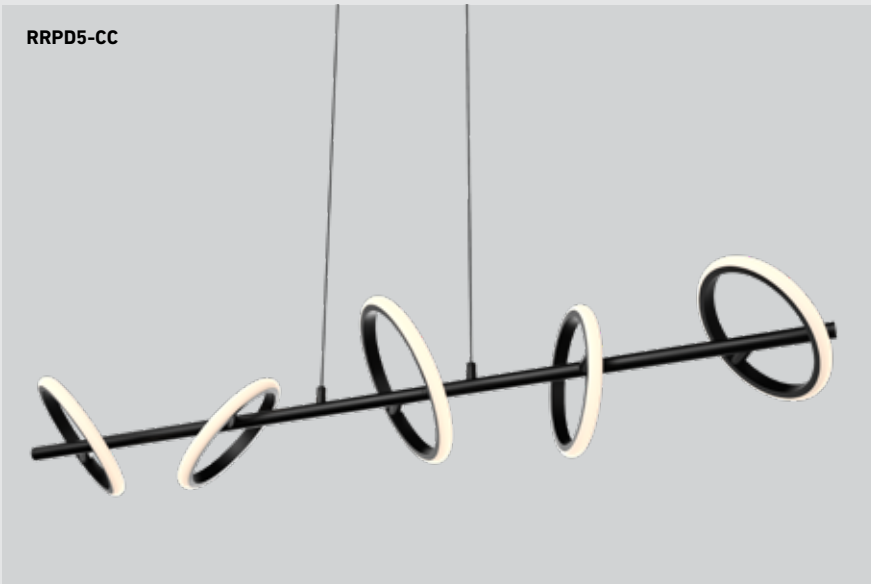


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RRPD2-CC	14"	12 W	750 lm	80	2700, 3000, 3500,	120 V
RRPD5-CC	42"	30 W	1530 lm		4000, 5000 K	

RRPD2-CC

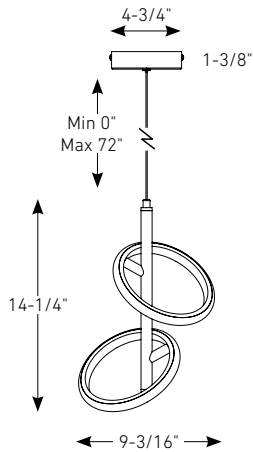

RRPD5-CC

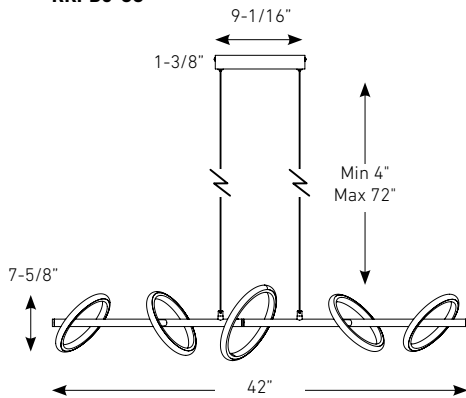

Specifications

Adjustable height up to 6 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish


● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


HELIX

A classic shape with a contemporary design. Helix is perfect for adding stature and prestige to any space. Its gentle spirals instantly enhance areas of the bedroom, kitchen islands, offices, and reading nooks.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SPR20-CC	20"	30 W	1060 lm	80	2700, 3000, 3500,	120 V
SPR34-CC	34"	60 W	2370 lm		4000, 5000 K	

SPR20-CC

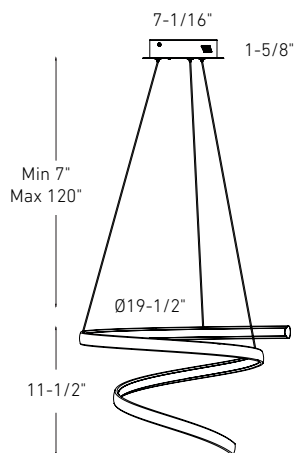

SPR34-CC

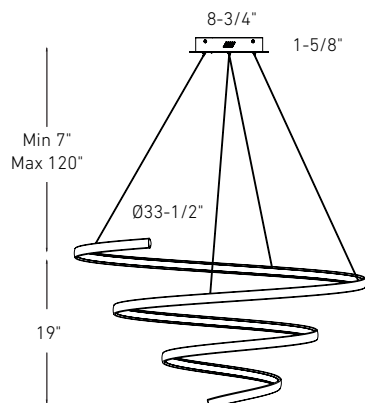

Specifications

Adjustable height up to 10 feet
Switch-selectable CCT
Frosted lens
Integrated dimmable driver
Canopy mount on 4" octagonal junction box
5-year warranty

Finish



● BK Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


TWIST

This smaller ribbon-like pendant gives you a continuous warm flow. As a new addition to our popular pendant series, it's ideal for smaller foyers, over a console table or even above the sink.

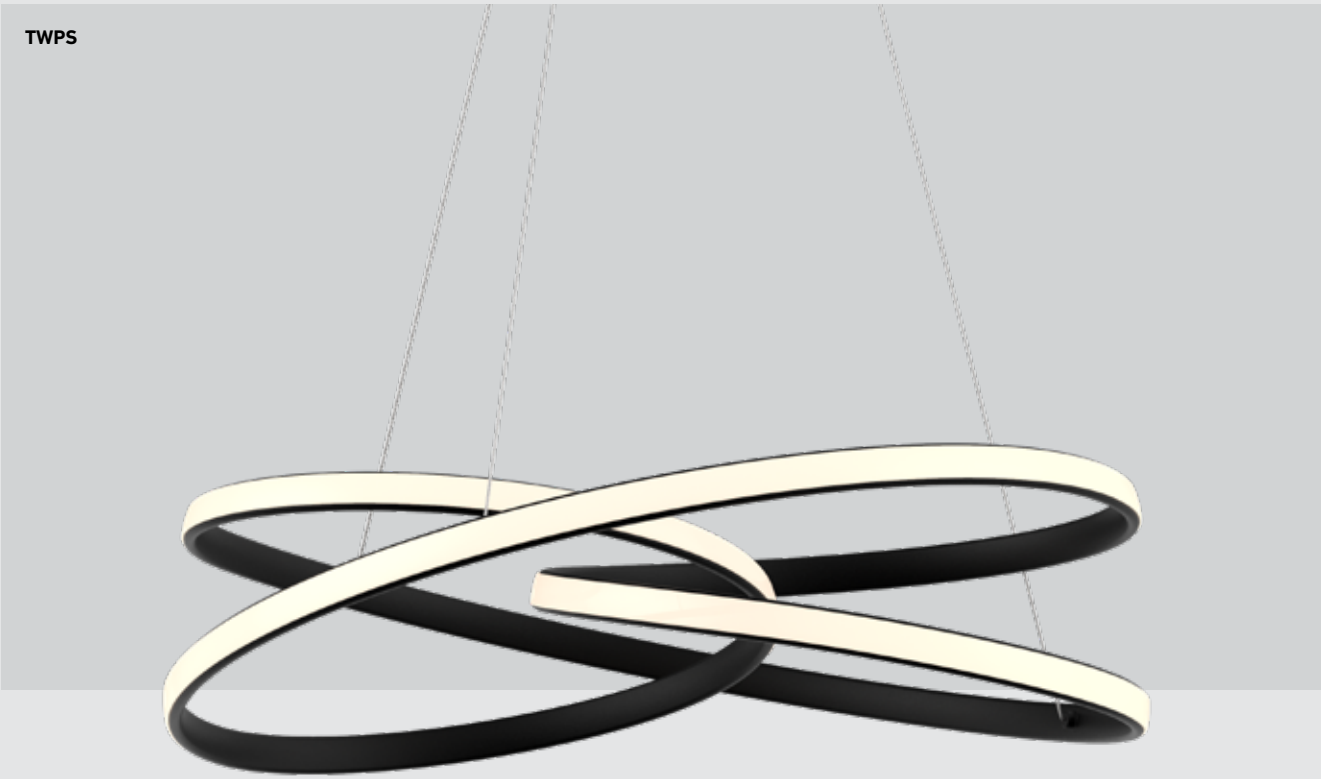

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TWPS	20.5"	30 W	1800 lm	85	3000 K	120 V

TWPS

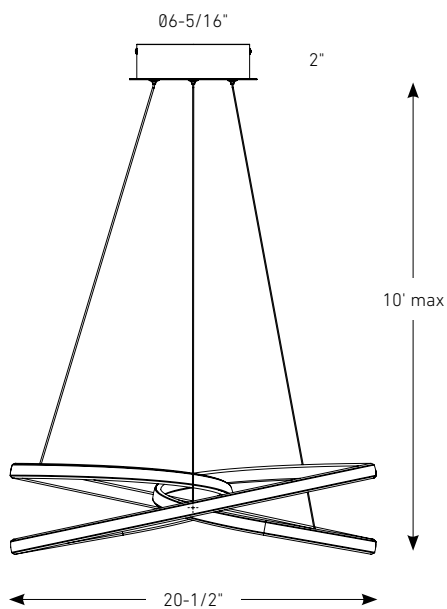

Specifications

Adjustable height up to 10 feet
Frosted lens
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish


● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


TWIRL

This ribbon-like pendant gives you a continuous warm white flow. It will definitely be a beautiful focal point to any room.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TWPD-CC	28"	84 W	3960 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

TWPD-CC

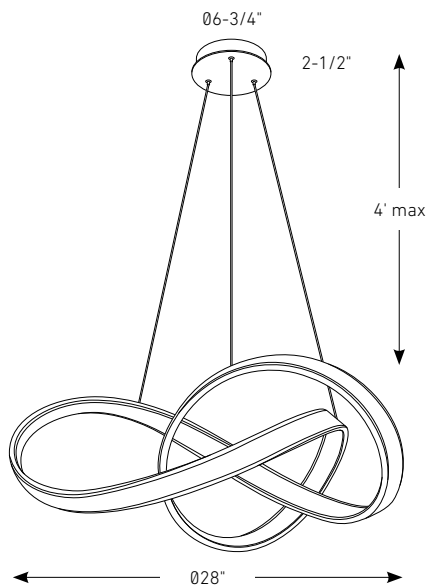

Specifications

Adjustable height up to 4 feet
Frosted lens
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish


● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ATOM

A unique design with clean lines that will add the final touch to your office, bedroom and even that newly renovated mud room. The double-sided ring will add warmth and character.




DAMP



FPD60-CC



FPDC3-CC

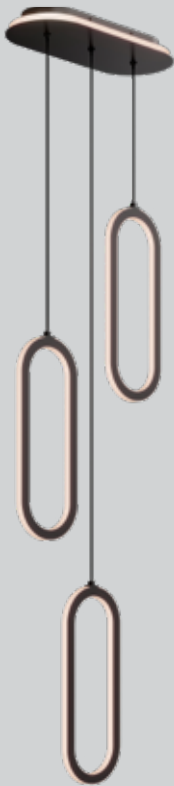

FDB-CC




FPD-CC




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FPD60-CC	60"	50 W	1700 lm	90	2700, 3000, 3500,	120 V
FPD-CC	16"	24 W	820 lm		4000, 5000 K	
FPDC3-CC	16-3/8"/3 lights	40 W	1400 lm			
FDB-CC	16"	40 W	1350 lm			


FPD60-CC

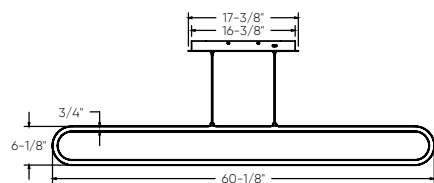


FPD-CC

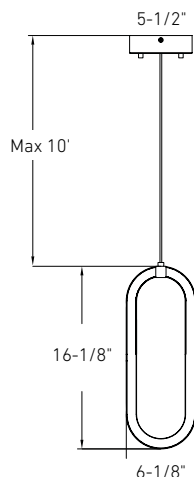

FPDC3-CC

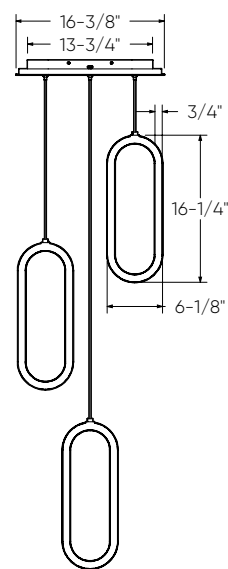

FDB-CC

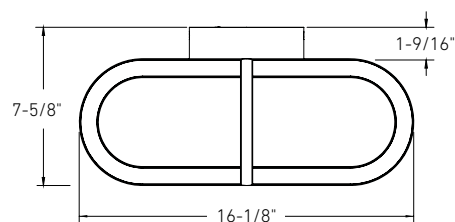

Specifications

Pendant height adjustable up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish


- BK** Black
- GD** Gold
(Not available for FPD60-CC)

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

CIRCA

Illuminate your space in style with our 24-inch circular pendant, available in multiple finishes, featuring adjustable 5CCT settings for customizable illumination that seamlessly blends style and functionality.




RGPD24-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RGPD24-CC	24"	28 W	1500 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V



RGP24-CC

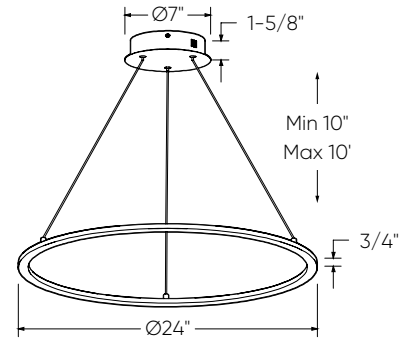

Specifications

Adjustable height up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish


- **BK** Black
- **GD** Gold
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



ECLIPSE

Simplicity and elegance are reunited in this minimalist double ring pendant. Over the kitchen island, as foyer lighting or in the boardroom, this will scream sophistication.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDR14-CC	14"	25 W	1700 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

PDR14-CC

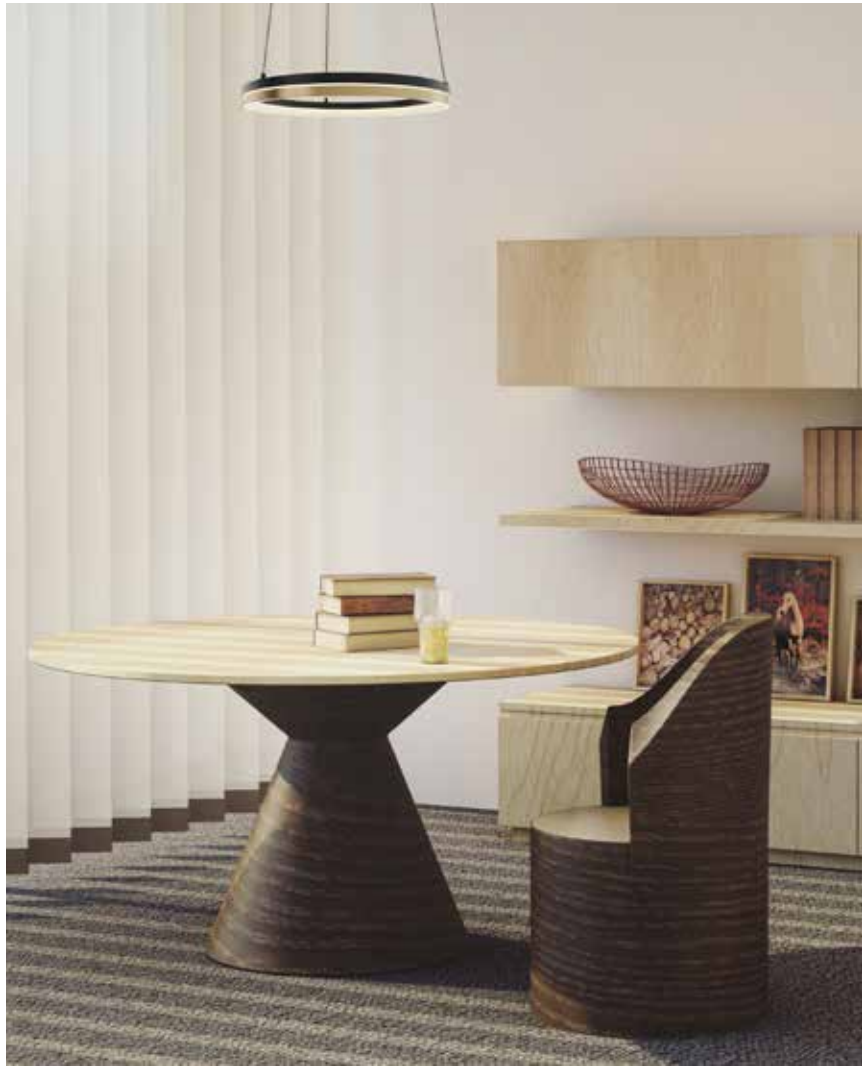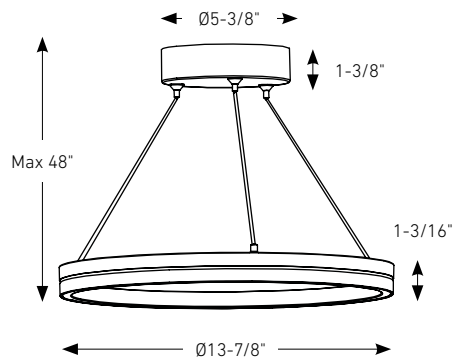

Specifications

Adjustable height up to 4 feet
Aluminum housing which serves as a highly efficient heat sink
Switch-selectable CCT
Frosted lens
Integrated dimmable driver
Canopy mount on 4" octagonal junction box
5-year warranty

Finish


 **BG** Black/Gold

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

PYRA

Discover contemporary elegance with these 22-inch and 34-inch rounded triangular pendant and flush mount lights, available in a variety of finishes and customizable 5CCT options.



DAMP


**T24
JA8**

CERTIFIED




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TRFM22-CC	22"	40 W	1900 lm	90	2700, 3000, 3500,	120 V
TRPD34-CC	34"	80 W	3600 lm		4000, 5000 K	

TRPD34-CC

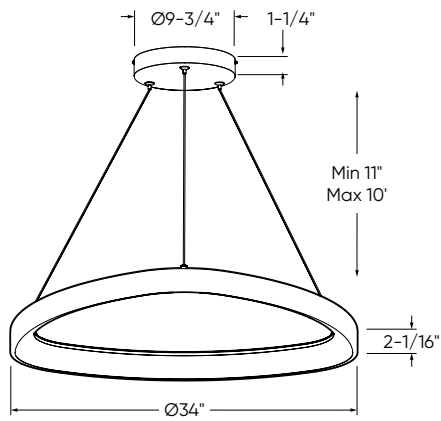

TRFM22-CC

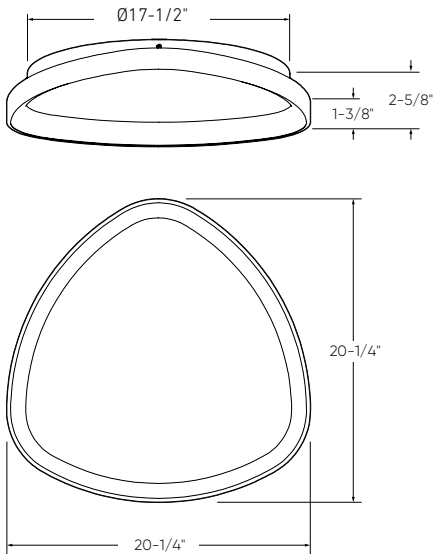

Specifications

Pendant height adjustable up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish

- **BK** Black
- **GD** Gold
- **WH** White


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.



DROP

Illuminate your space in style with our two-tier 20-inch pendant, showcasing two-zone lighting with a lit canopy and a 12-inch downlight—all customizable with 5 CCT options—in a sleek black finish, effortlessly blending modern design with versatile functionality.



DRY




CFPD20-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CFPD20-CC	20"	39 W	1675 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

CFPD20-CC

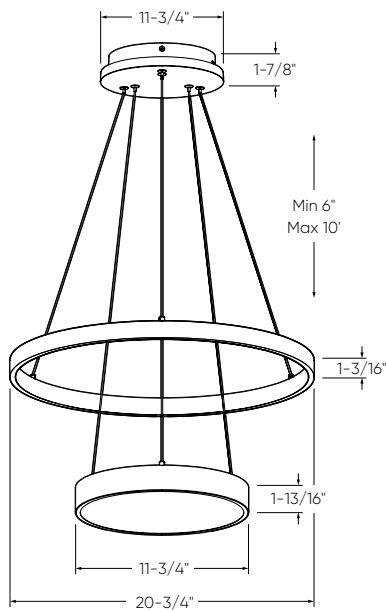

Specifications

Adjustable height up to 10 feet
Both lights are independently adjustable
Switch-selectable CCT
Integrated dimmable driver
Illuminated canopy
Canopy mount on 4" octagon
junction box
5-year warranty

Finish

● **BK** Black

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.





ASTERISK

Apportez une touche de sophistication à votre espace avec la famille Asterisk, alliant style et fonctionnalité pour éclairer votre environnement avec élégance moderne.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SSPD32-CC	32"	30 W	1500 lm	80	2700, 3000, 3500,	120 V
SSFM20-CC	20"	15 W	1060 lm		4000, 5000 K	



Specifications

Adjustable height up to 10 feet
Switch-selectable CCT
Integrated dimmable driver
Includes 5 robust stems
Canopy mount on 4" octagon junction box
5-year warranty


Finish

● **BK** Black




Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SSPD32-CC



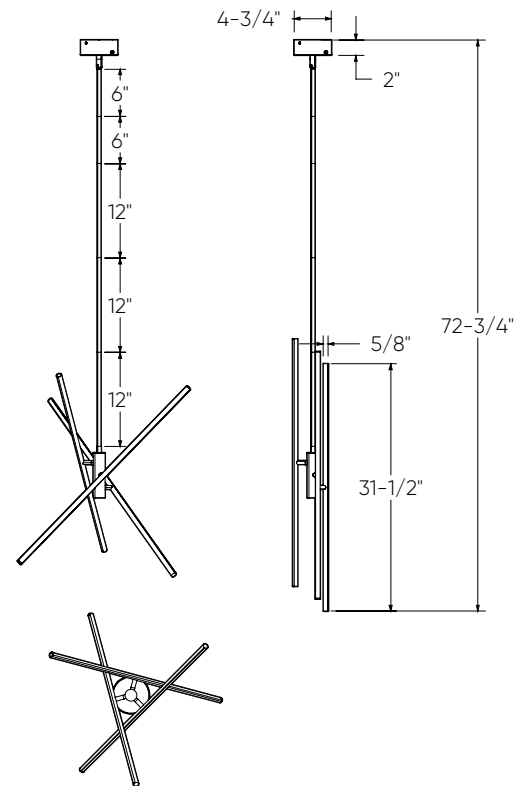


SSFM20-CC

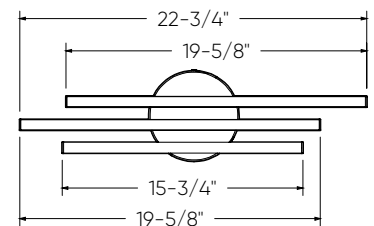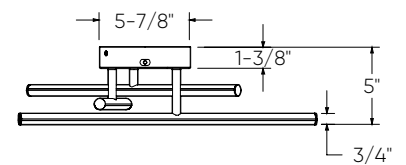

STELLAR

The Stellar series is designed to illuminate your space like no other. With both uplight and downlight elements, these fixtures make a striking addition to any dining room, kitchen, living room, or foyer

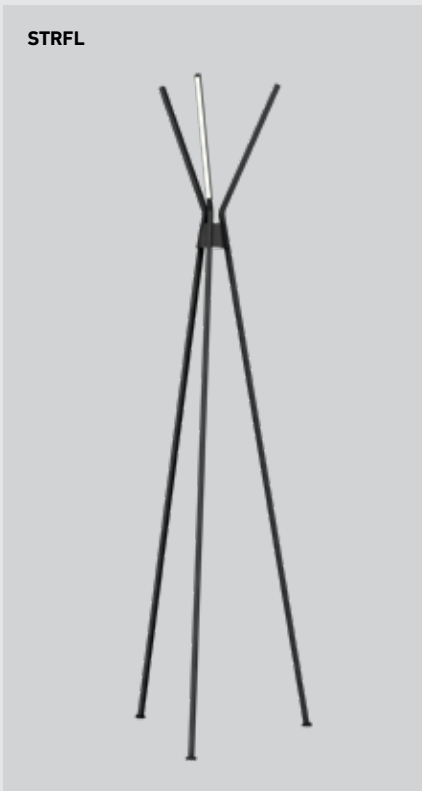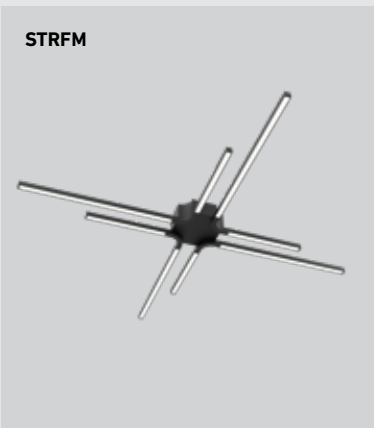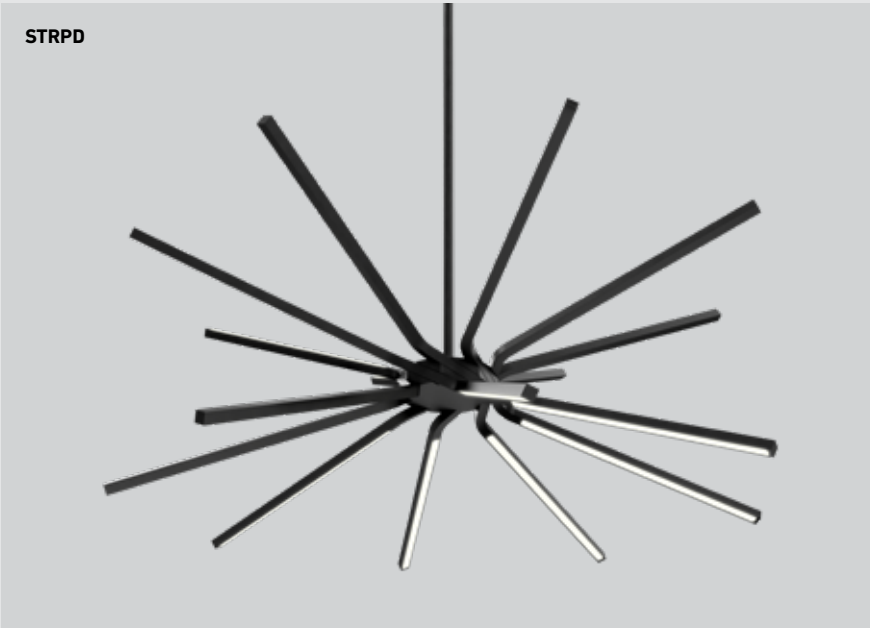

3000k






COLOR TEMPERATURE



ADA
COMPLIANT**



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
STRPD*	30"	33 W	1880 lm	90	3000 K	120 V
STRFL*	64"	14 W	1200 lm			
STRFM*	32"	40 W	2000 lm			
STK21**	21"	7 W	400 lm			
STK37**	37"	13 W	840 lm			

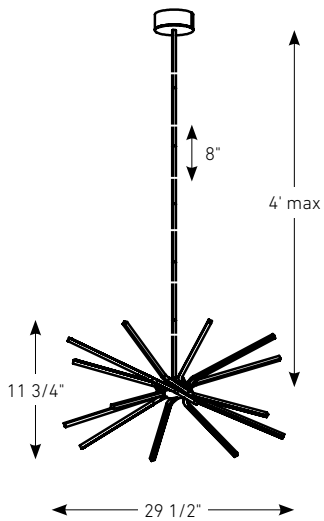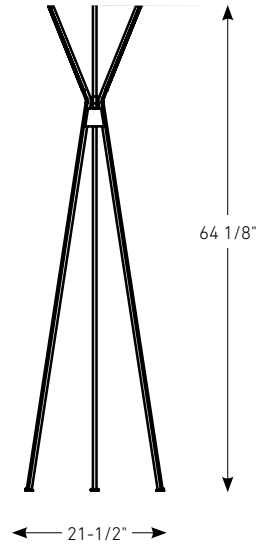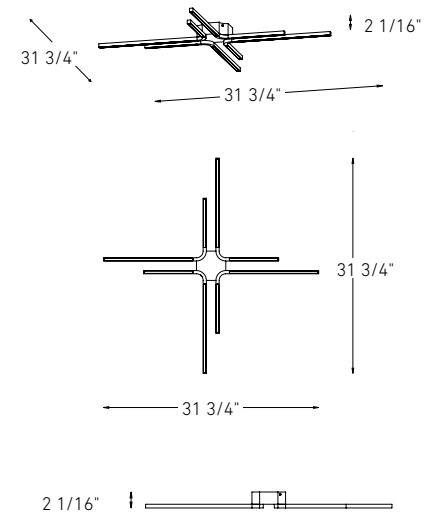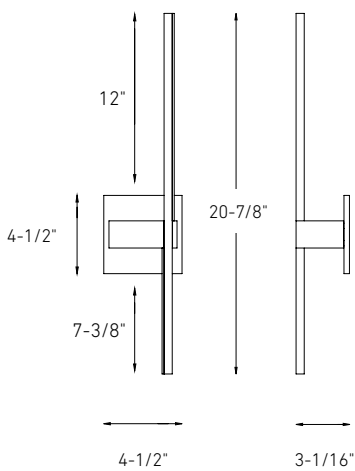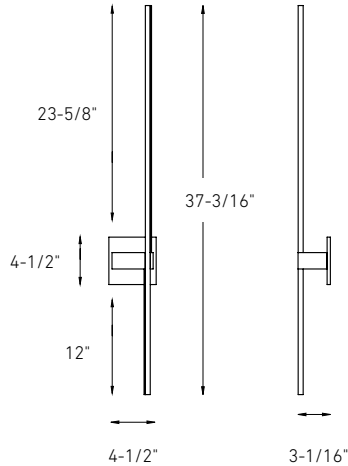STRPD**STRFL****STRFM****STK21****STK37****Specifications**

Aluminum housing which serves as a highly efficient heat sink
 Frosted lens
 Integrated dimmable driver
 Canopy mount on 4" octagon junction box
 5-year warranty

Finish

- **BK** Black
- **WH** White

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.






NOVA

Designed for modern and new builds, this cylindrical hanging pendant provides a simple and elegant way to enhance your space. At 18-inches in length, and with an ultra-thin flat canopy with adjustable 10-foot cable, this fixture can be installed as easily as any recessed light. Switch-selectable color temperatures ranging from 3000, 3500, and 4000 K, to create a subtle and customizable lighting effect.



DAMP

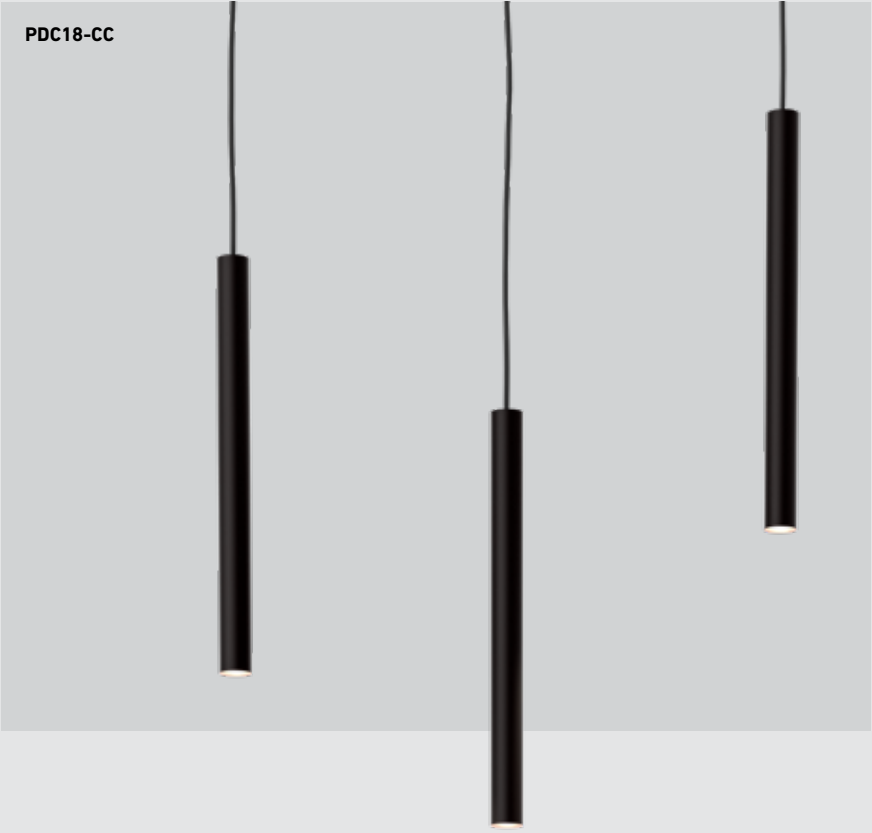


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDC18-CC	18"	9 W	510 lm	90	3000 K - 3500 K - 4000 K	120 V



PDC18-CC

Ø3 3/8"

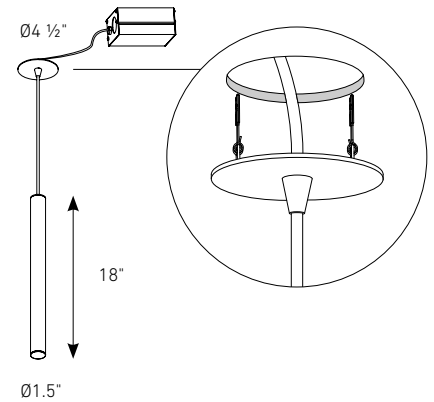

Specifications

Adjustable cable length up to 10 feet
Switch-selectable CCT
Every fixture includes a junction box with integrated dimmable driver
Ultra-slim canopy, installs like a recessed fixture
Frosted reflector
5-year warranty

Finish

- **BK** Black
- **SBA** Sandblasted aluminum
- **WH** White

Accessories



RFP-UNI
Universal rough-in plate

Note









Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

CHANNEL

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design, whether in a cluster or standalone. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.

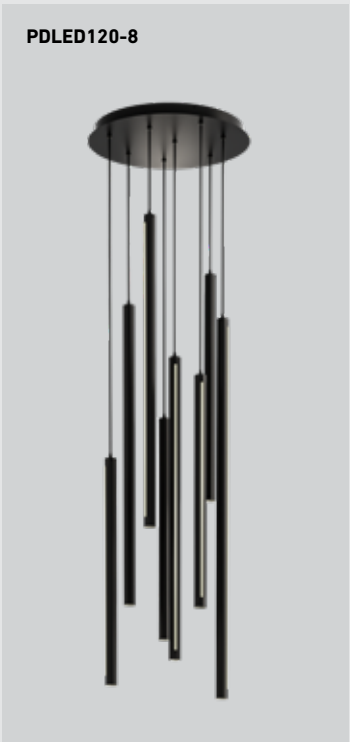

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDLED120-24	24"	30 W	300 lm	90	3000, 3500, 4000 K	120 V - 277 V
PDLED120-36	36"	30 W	300 lm			
PDLED120-48	48"	30 W	300 lm			
PDLED120-60	60"	30 W	300 lm			
PDLED120-5	Ø22"/5 lights	150 W	1500 lm			
PDLED120-8	Ø26"/8 lights	240 W	2400 lm			
PDLED120-5SQ	47"/5 lights	150 W	1500 lm			
PDLED120-8SQ	84"/8 lights	240 W	2400 lm			

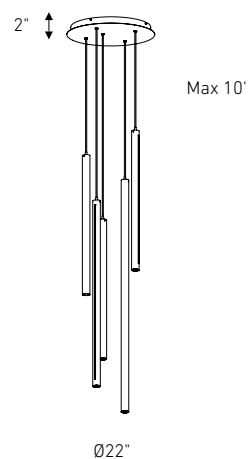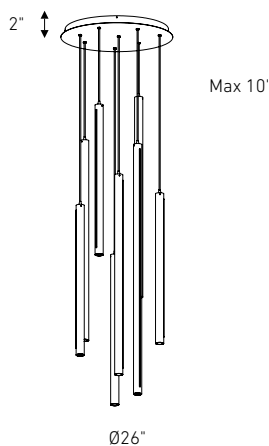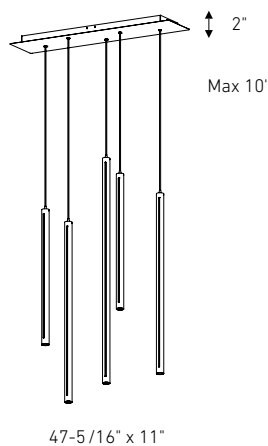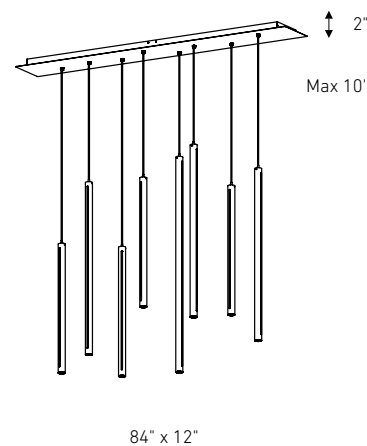PDLED120-24**PDLED120-36****PDLED120-48****PDLED120-60****PDLED120-5****PDLED120-8****PDLED120-5SQ****PDLED120-8SQ****Specifications**

Adjustable cable length to 10 feet
 Switch-selectable CCT: 3000 K/
 3500 K/4000 K inside canopy
 Frosted reflector
 Canopy mount on 4" octagon junction box
 Integrated dimmable driver
 Compatible with TRIAC, ELV and
 0-10 V dimmers
 5-year warranty

Finish

- **BK** Black
- **WH** White


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

FOCUS

The Focus modern LED cylinder flush mounts are available in two sizes—5-inch and 6-inch—with the larger size featuring a multi-voltage driver for added versatility.



COLOR TEMPERATURE



WET

**T24
JA8**
CERTIFIED




CYL05-CC

CYL06-CC-V

Multi-lens


3 optical options:
clear, frosted and honeycomb




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CYL05-CC	5"	20 W	1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
CYL06-CC-V	6"	26 W	1500 lm	90	2700, 3000, 3500, 4000, 5000 K	V: 120 / 277 / 347V 0-10V dimming



CYL05-CC



CYL06-CC-V



Specifications

Every fixture includes a junction box with an integrated driver

3 optical options: clear, frosted and honeycomb

35° beam angle for CYL05-CC

45° beam angle for CYL06-CC-V

Aluminum construction

Switch-selectable CCT

5-year warranty

Finish

● **BK** Black

○ **WH** White

Accessories

CYL05-TRIM-XX

Internal trim for 5" cylinder available in Alzak, Black, Gold, or White finishes

CYL06-TRIM-XX


Internal trim for 6" cylinder available in Alzak, Black, Gold, or White finishes

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

HOVER

Rise to the occasion – crafted to ascend in design, this versatile fixture adds a contemporary touch to any room, bringing a sleek and efficient aesthetic to your space.




CCFM-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CCFM-CC	24"	42 W	2250 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

CCFM-CC

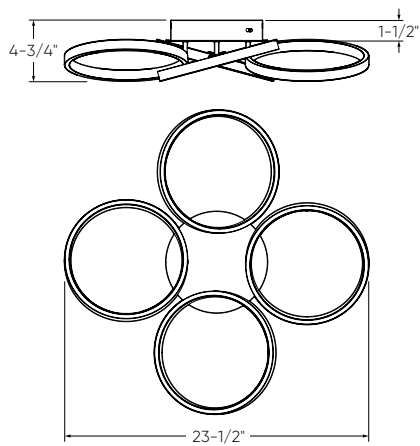

Specifications

Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish


● **BK** Black
● **GD** Gold

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEWTON

A classic yet modern style, this unique flush mount will definitely impress. Not only will it light up the room from its central light source but will also emit a soft glow from its illuminated outer rings.




DAMP



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FMT18-CC	18"	24 W	1300 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

FMT18-CC

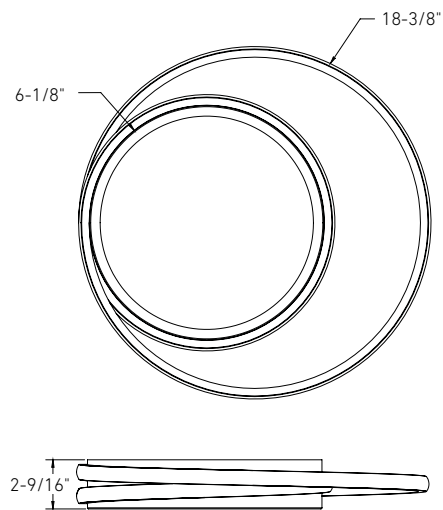

Specifications

Die-cast aluminum housing
Switch-selectable CCT
Canopy mount on 4" octagonal
junction box
Adjustable mounting position
5-year warranty

Finish


● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

MISTY

This flush mount offers clean lines and a wonderful semi-opaque diffuser that adds flair without being the center of attention. It will definitely blend into any project you may have.




FUZ11-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FUZ11-CC	11"	15 W	1000 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

FUZ11-CC

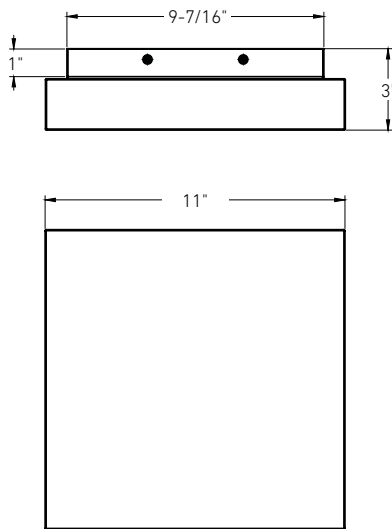

Specifications

Integrated dimmable driver
Die-cast aluminum housing
Switch-selectable CCT
Canopy mount on 4" octagonal
junction box
5-year warranty

Finish


● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

AURORA

We have succeeded in creating a very unique solution with our LED flush mounts. They project a tremendous amount of light, and can also be dimmed to provide a back-lit halo that will gently illuminate your way during the night hours.




CFH12-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CFH12-CC	12"	27 W	1725 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V



CFH12-CC

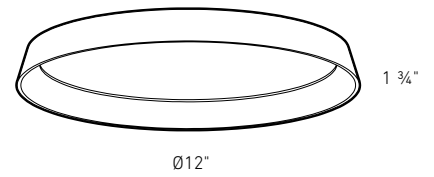

Specifications

Dual control functionality: Adjust the CCT of the main light and backlight independently
Frosted lens
Edge-lit technology
Die-cast aluminum housing
General lighting zone turns off in the lower dimming range, back lighting stays on
Canopy mount on 4" octagon junction box
5-year warranty

Finish


- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ORA

A beautiful round glass flush mount that offers more than the eye can see. With five color temperatures to choose from, this is as versatile as can be. From hallways to bedrooms and bathrooms to basements. It will add flair to any room.




CFG13-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
CFG13-CC	13"	32 W	1800 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V



CFG13-CC

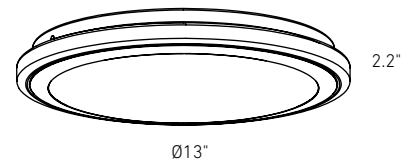

Specifications

Integrated dimmable driver
Frosted glass lens
Die-cast aluminum housing
Switch-selectable CCT
Canopy mount on 4" octagonal junction box
5-year warranty

Finish


- **BK** Black
- **GD** Gold
- **SN** Satin Nickel

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

FUSION FLUSH MOUNT

The Fusion trimless 12- and 21-inch flush mount family showcase a harmonious union of minimalist design and expansive illumination, providing a blend of sophistication and functionality for contemporary spaces.




WET




TLFM12-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TLFM12-CC	12"	25 W	2000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
TLFM21-CC	21"	45 W	4300 lm			

TLFM12-CC

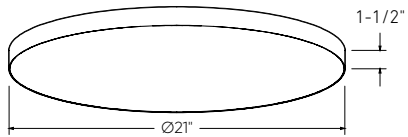TLFM21-CC

Specifications

Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-year warranty

Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

DELTA

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. With 5 sizes to choose from, every application is covered.

CFLEDR18-CC



CFLEDR06-CC



CFLEDR10-CC




CFLEDR24-CC



CFLEDR14-CC



NEW




WET



**T24
JA8**
CERTIFIED


CFLEDSQ06-CC



CFLEDSQ10-CC




CFLEDSQ14-CC

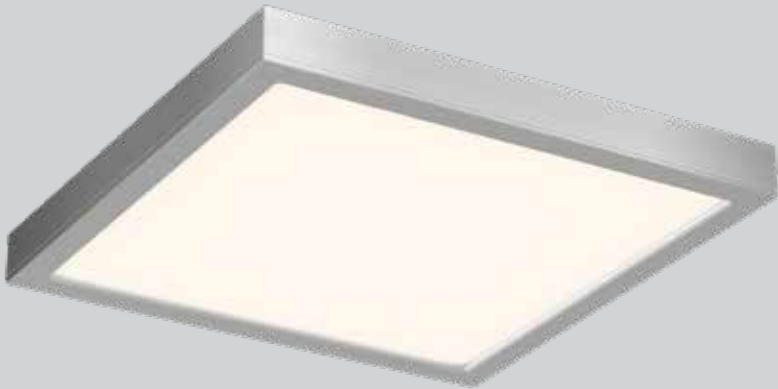

NEW

DELTA

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. With 5 sizes to choose from, every application is covered.



COLOR TEMPERATURE




WET





**T24
JA8**
CERTIFIED


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
CFLEDR06-CC	6"	11 W	700 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
CFLEDSQ06-CC*	6"	11 W	700 lm			
CFLEDR10-CC	10"	17 W	1200 lm			or
CFLEDSQ10-CC*	10"	17 W	1200 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)
CFLEDR14-CC	14"	26 W	1700 lm			
CFLEDSQ14-CC*	14"	26 W	1700 lm			
CFLEDR18-CC	18"	30 W	2100 lm			
CFLEDR24-CC	24"	40 W	3000 lm			


*Not available in multi-voltage


CFLEDR06-CC


CFLEDR10-CC


CFLEDR14-CC

CFLEDR18-CC

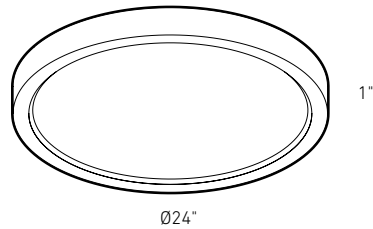CFLEDR24-CC

CFLEDSQ06-CC





CFLEDSQ10-CC

CFLEDSQ14-CC

Specifications

Integrated dimmable driver
Smooth 360° wide spread
Minimal heat emission
Frosted lens
Edge-lit technology
Cast aluminum construction
Suitable for outdoor locations
on covered ceilings only
5-year warranty

Finish

-  **BK** Black
-  **GD** Gold
(6, 10, 14" round models)
-  **SN** Satin Nickel
(6, 10, 14" round and square models)
-  **WH** White

Multi-voltage (V) ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

RADIANCE

The Radiance family features a seamless fusion of refined metal craftsmanship, offering a sophisticated and understated focal point that smoothly integrates into any interior decor.



WET




FMM09-CC

FMM12-CC




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FMM09-CC	9"	14 W	1100 lm	80	2700, 3000, 3500,	120 V
FMM12-CC	12"	20 W	1800 lm		4000, 5000 K	

FMM09-CC



FMM12-CC

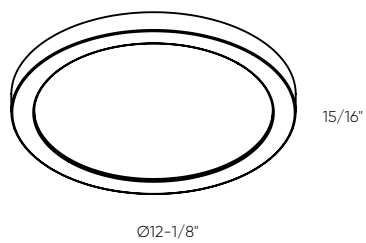

Specifications

Switch-selectable CCT
Integrated dimmable driver
Suitable for outdoor locations
on covered ceilings only
Canopy mount on 4" octagon
junction box
5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White



Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

PRIME

These 5-, 9-, and 12-inch flush mount fixtures form a versatile trio, each exuding contemporary design and providing practical illumination. The 5-inch model boasts a variant equipped with a motion sensor, adding a touch of modern convenience to your lighting experience.

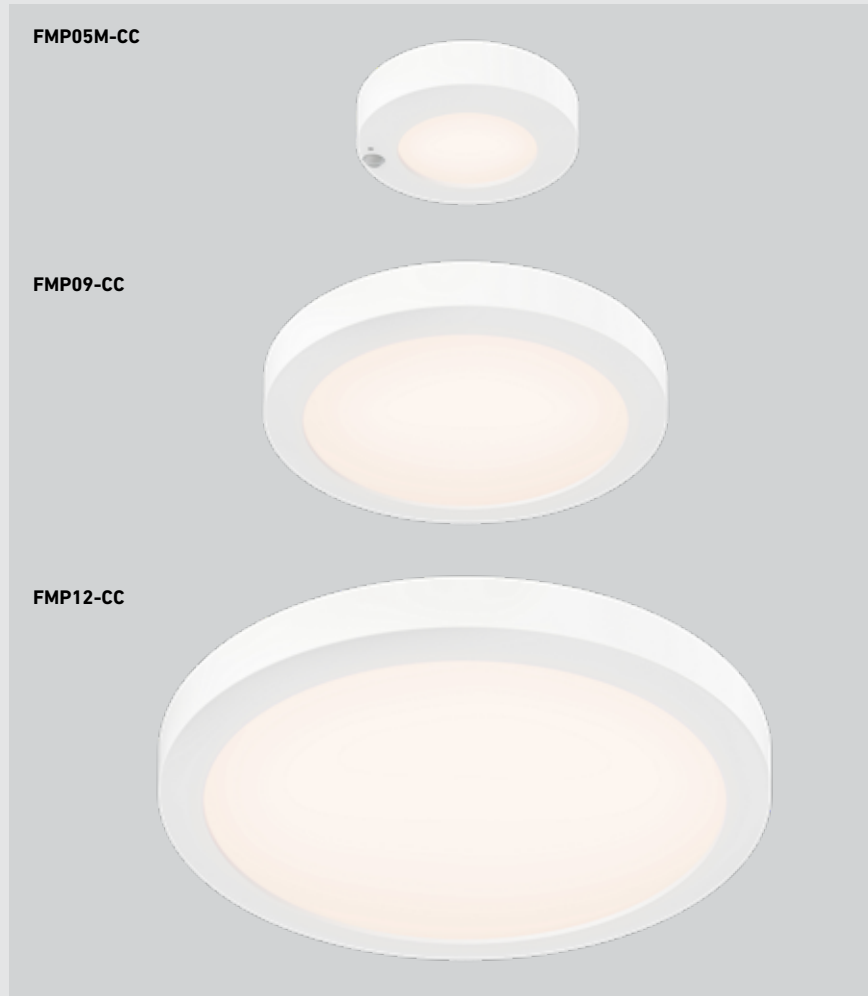

COLOR TEMPERATURE



DAMP



WET**



MOTION SENSOR*




COASTAL FRIENDLY**





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FMP05-CC	5"	9 W	600 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
FMP05M-CC*	5"	9 W	600 lm	80		
FMP05-CC-CR**	5"	9 W	470 lm	90		
FMP09-CC	9"	14 W	1110 lm	80		
FMP09-CC-CR**	9"	14 W	960 lm	90		
FMP12-CC	12"	20 W	1800 lm	80		
FMP12-CC-CR**	12	20 W	1530 lm	90		

*Model FMP05M-CC only, non dimmable.

**Models FMP05-CC-CR, FMP09-CC-CR, FMP12-CC-CR only, designed to withstand salty air. 480h salt spray test approved. Equivalent to 6.5 years in coastal environment.

FMP05-CC, FMP05-CC-CR, FMP05M-CC

FMP09-CC, FMP09-CC-CR

FMP12-CC, FMP12-CC-CR

Specifications

Switch-selectable CCT
Integrated dimmable driver (models FMP05, FMP09, FMP12-CC only)
Motion sensor (model FMP05M-CC only)
Designed to withstand salty air (models FMP05-CC-CR, FMP09-CC-CR, FMP12-CC-CR only)
5-year warranty

Finish

○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

SHIFT

A sleek, high-quality LED profile luminaire with direct light output, crafted from durable aluminum extrusion. Its oblong linear head features an efficient 90° swiveling design for versatile lighting.



COLOR TEMPERATURE



DAMP



SWIVEL/DIRECTIONAL



VA032-CC




VA024-CC





Easy-Adjust Mounting

The fixture can be offset from the electrical box by up to 5-1/2 inches to the left or right, making it easy to align with existing elements such as a sink or mirror.

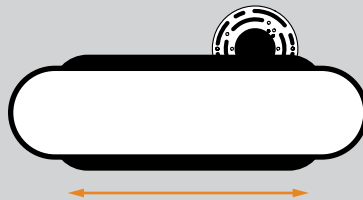

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VA024-CC	24"	31 W	2470 lm	90	2700, 3000, 3500,	120 V
VA032-CC	32"	34 W	2680 lm		4000, 5000 K	

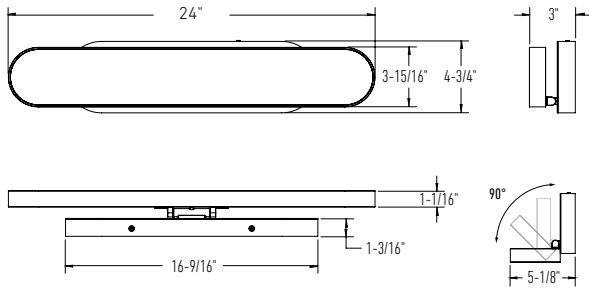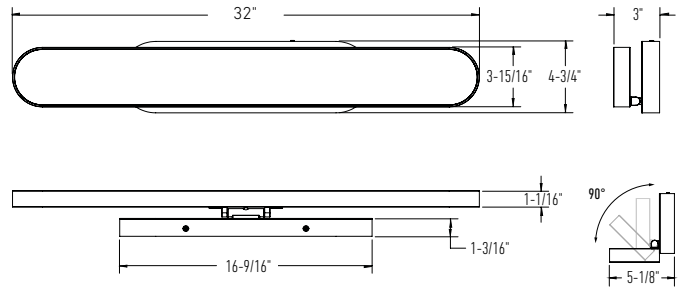VA024-CC**VA032-CC****Specifications**

Switch-selectable CCT
90 degree swivel
Sliding mounting bracket for easy adjustability
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish

BK Black
GD Gold


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

LEDGE

A sleek, high-quality LED vanity light with direct illumination, made from sturdy aluminum. Its streamlined linear design provides even, versatile lighting, perfect for modern spaces. Available in two sizes and multiple finishes.



VAL24-CC




VAL36-CC




Easy-Adjust Mounting

The fixture can be offset from the electrical box by up to 9 1/2 inches (VAL24-CC) or 15 1/2 inches (VAL36-CC) to the left or right, allowing for easy alignment with existing elements such as a sink or mirror.

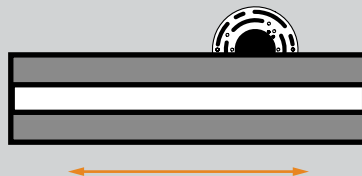


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VAL24-CC	24"	30 W	2200 lm	90	2700, 3000, 3500,	120 V
VAL36-CC	36"	32 W	2330 lm		4000, 5000 K	

VAL24-CC

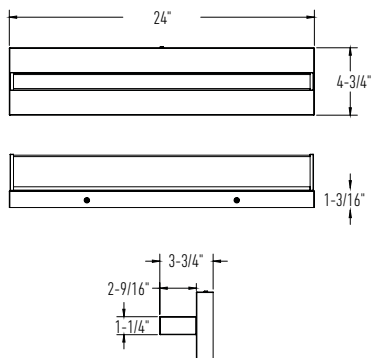

VAL36-CC

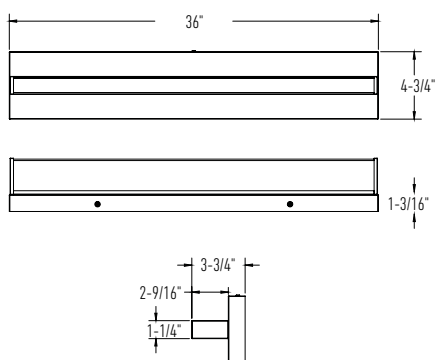

Specifications

Switch-selectable CCT
Sliding mounting bracket for easy adjustability
Integrated dimmable driver
Canopy mount on 4" octagon junction box
5-year warranty

Finish


- BK** Black
- CH** Chrome
- SN** Satin Nickel

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

BALANCE

Transform your bathroom ambiance with our 24 and 36-inch two-tone vanity light, featuring a stylish interplay of finishes, and complete with an elegant round canopy for a minimalist touch.




VCC36-CC

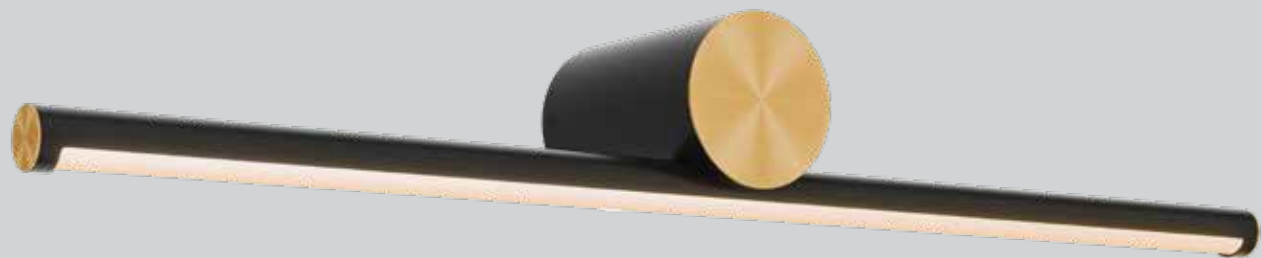


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VCC24-CC	24"	20 W	1490 lm	90	2700, 3000, 3500,	120 V
VCC36-CC	36"	30 W	1950 lm		4000, 5000 K	

VCC24-CC

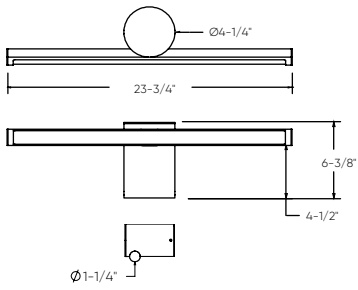

VCC36-CC

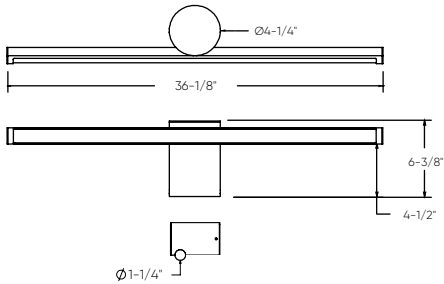

Specifications

Switch-selectable CCT
Integrated dimmable driver
Canopy mount on 4" octagon
junction box
5-1/4" decorative disc included
5-year warranty

Finish


 **BG** Black/Gold

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

LIGHTNING

Make a bold statement with this wall-mounted light fixture, featuring a sleek bolt-shaped design that seamlessly combines modern aesthetics with functional elegance. Versatile in its installation, it can also be mounted vertically for a unique lighting experience.



DAMP

ADA
COMPLIANT




VDL40-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VDL40-CC	40"	30 W	1500 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

VDL40-CC

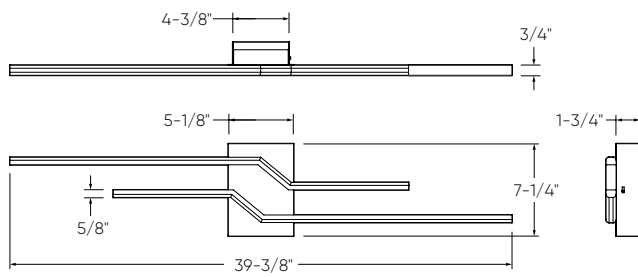

Specifications

Switch-selectable CCT
Integrated dimmable driver
Illuminated canopy
Canopy mount on 4" octagon
junction box
5-year warranty

Finish


- **BK** Black
○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ARIA

A modern, high-quality LED profile luminaire with direct light emission. Made of an aluminum extrusion and comes with an efficient 120° swiveling linear head.



DAMP




SWIVEL/DIRECTIONAL



VSW36-CC*




VSW24-CC

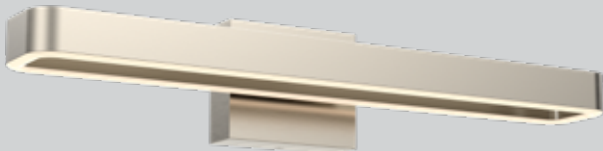


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VSW24-CC	24"	40 W	1280 lm	90	2700, 3000, 3500,	120 V
VSW36-CC	36"	40 W	1500 lm		4000, 5000 K	

VSW24-CC

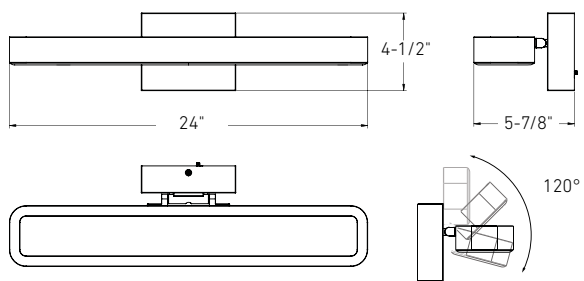

VSW36-CC

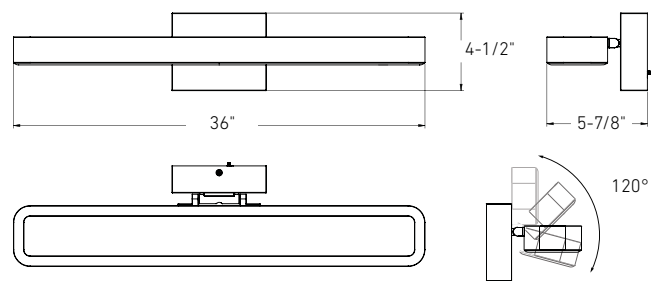

Specifications

Superior color consistency
Integrated dimmable driver
Switch-selectable CCT
Minimal heat emission
Aluminum construction
120 degree swivel
5-year warranty

Finish


- BK** Black
- SN** Satin Nickel (VSW24-CC only)

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

NOBLE ONE

The flexibility of our LED vanity will give you many options to work with. It can be installed in a horizontal or vertical direction, and is available in 3 finishes.




DAMP

ADA
COMPLIANT




LEDVAN001-CC-18

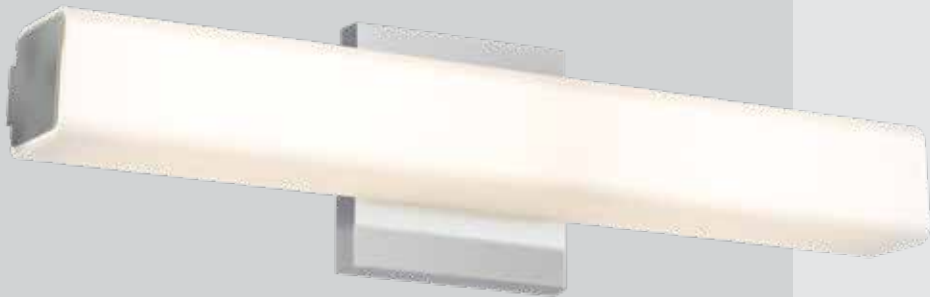


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDVAN001-CC-18	18"	16 W	1000 lm	90	2700, 3000, 3500,	120 V
LEDVAN001-CC-24	24"	24 W	1600 lm		4000, 5000 K	



LEDVAN001-CC-18



LEDVAN001-CC-24

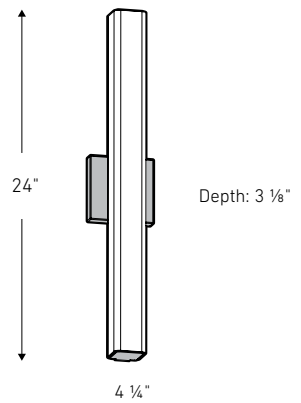

Specifications

Switch-selectable CCT:
 Square frosted glass lens
 Superior color consistency
 Integrated dimmable direct-AC
 LED technology
 5-year warranty

Finish


- **BK** Black
- **CH** Chrome
- **SN** Satin Nickel

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

NOBLE TWO

The flexibility of our LED vanity will give you many options to work with. It can be installed horizontally or vertically, and is available in 3 finishes.




DAMP


ADA
COMPLIANT




LEDVAN002-CC-24

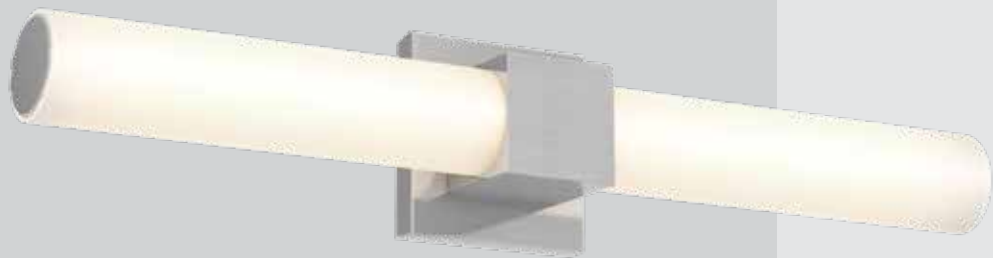

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDVAN002-CC-24	24"	24 W	1525 lm	90	2700, 3000, 3500,	120 V
LEDVAN002-CC-36	36"	32 W	2050 lm		4000, 5000 K	

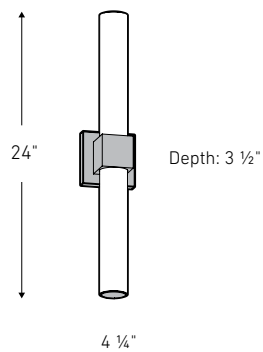LEDVAN002-CC-24

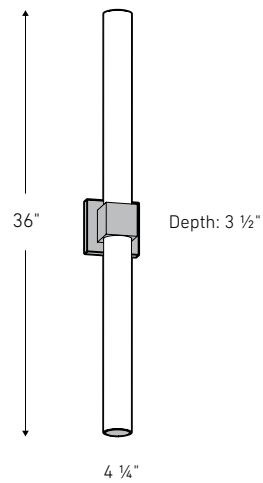LEDVAN002-CC-36

Specifications

Switch-selectable CCT
Round frosted glass lens
Integrated dimmable direct AC
LED technology
5-year warranty

Finish


- **BK** Black
- **CH** Chrome
- **SN** Satin Nickel

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

LYRA

These modern LED vanity lights can be installed in 2 directions; horizontal or vertical based on your desired lighting layout. Let your imagination go.



DAMP

ADA
COMPLIANT

**T24
JA8**
CERTIFIED

LEDVAN003-CC-24




LEDVAN003-CC-32




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDVAN003-CC-24	24"	23 W	1900 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
LEDVAN003-CC-32	32"	38 W	2800 lm			

LEDVAN003-CC-24

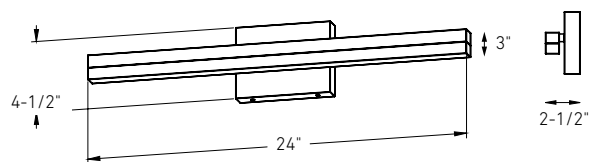

LEDVAN003-CC-32

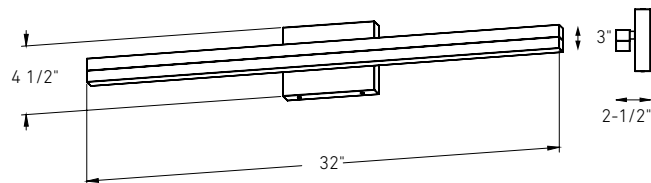

Specifications

Switch-selectable CCT
Superior color consistency
Integrated dimmable driver
5-year warranty

Finish


- **BK** Black
- **CH** Chrome
- **GD** Gold
- **SN** Satin Nickel

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

PORTRAIT

Upgrade your living space with our versatile directional vanity light, suitable for any room. This fixture allows you to point the light in any direction, providing both functionality and style for a modern touch.



DAMP


180°

SWIVEL/DIRECTIONAL




VLG36-CC

VLG24-CC




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VLG24-CC	24"	16 W	1100 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
VLG36-CC	36"	26 W	1400 lm			

VLG24-CC

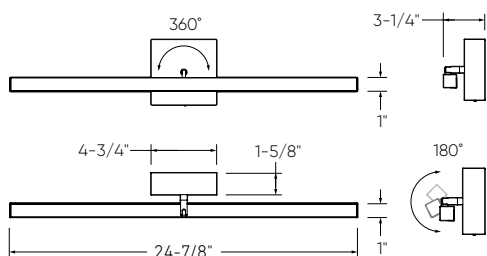

VLG36-CC

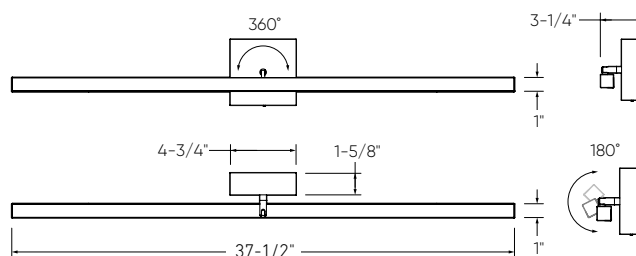

Specifications

Switch-selectable CCT
Integrated dimmable driver
360° rotation, 180° swivel
Multi-directional lighting with light coming from below and behind the luminaire
Canopy mount on 4" octagon junction box
5-year warranty

Finish



- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

GEMINI





This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.

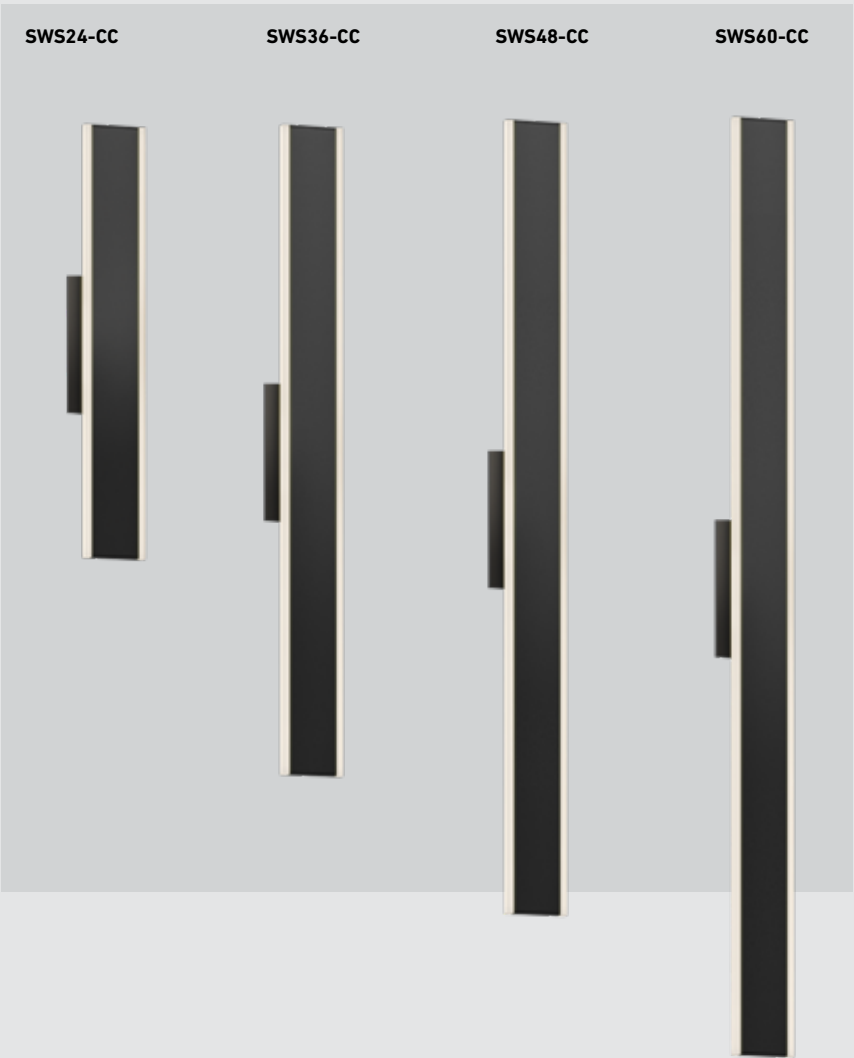

ADA
COMPLIANT



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SWS24-CC	24"	20 W	900 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
SWS36-CC	36"	30 W	1600 lm			
SWS48-CC	48"	40 W	1900 lm			
SWS60-CC	60"	50 W	2300 lm			

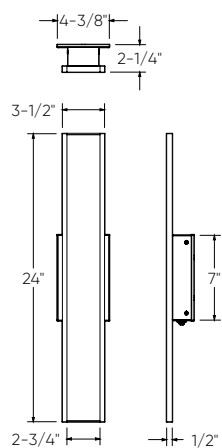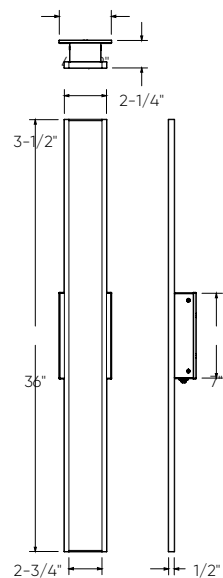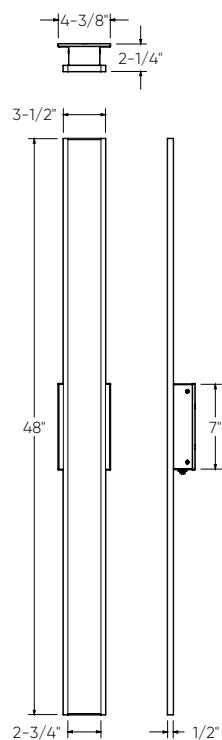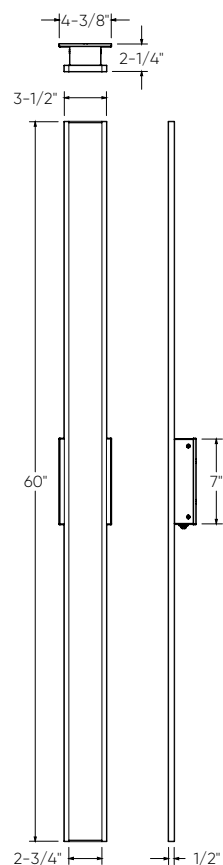SWS24-CC**SWS36-CC****SWS48-CC****SWS60-CC****Specifications**

Switch-selectable CCT
 Integrated dimmable driver
 Compatible with TRIAC and ELV dimmers
 5-year warranty

Finish



● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

MIDNIGHT

The 24-inch indirect linear wall sconce emanates a soft, ambient glow, elegantly transforming any space with its sleek design. Get creative with its versatile mounting options, allowing it to be installed in a clock-like manner, offering a customizable lighting solution.

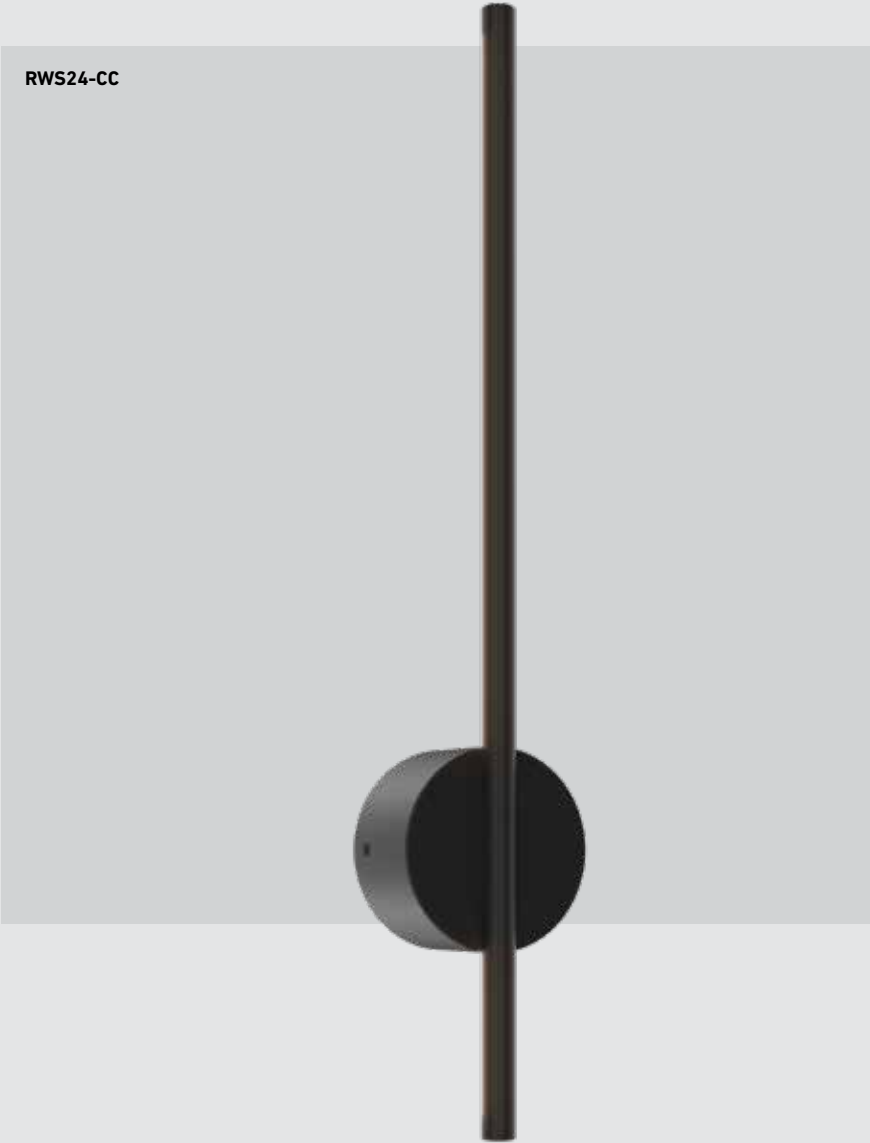


ADA
COMPLIANT




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RWS24-CC	24"	6 W	400 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
RWS48-CC	48"	14 W	1000 lm			
RWS60-CC	60"	17 W	1400 lm			


RWS24-CC

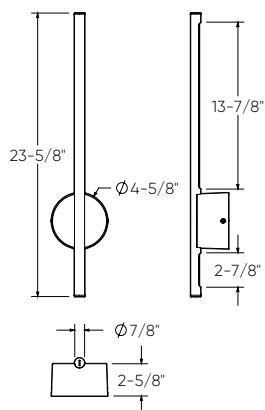

RWS48-CC

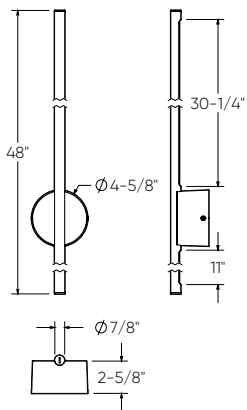

RWS60-CC

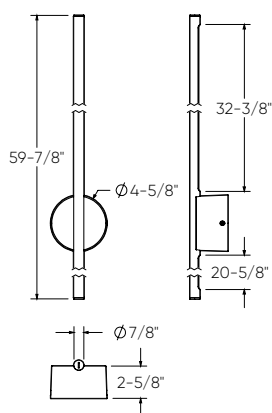

Specifications

Switch-selectable CCT
Integrated dimmable driver
Wall mount on 4" octagon
junction box
5-year warranty

Finish

● **BK** Black

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.





PROFILE

Love at first sight, guaranteed. This will not only give you up and down lighting but also central through a delicate acrylic opening. Want to adapt your lighting to your environment? No problem. This wall mount has five color temperatures to choose from which makes it ideal for city or country living.




WET




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LWJ08-CC	8"	10 W	390 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
LWJ16-CC	16"	20 W	760 lm			
LWJ24-CC	24"	45 W	2345 lm			




LWJ08-CC



LWJ16-CC



LWJ24-CC

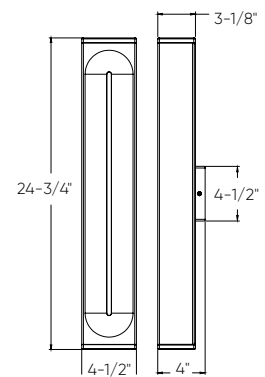

Specifications

Made of extruded aluminum
Unique up, down, and center lighting output
Low profile design
Switch-selectable CCT
Integrated dimmable driver
5-year warranty

Finish

- BK Black
- WH White (LWJ16-CC only)

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ADEN

The key design element of our LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.



3000k
COLOR TEMPERATURE



ADA
COMPLIANT



T24
JA8
CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-A	11-3/4"	29 W	2100 lm	90	3000 K	120 V - 277 V



LEDWALL-A

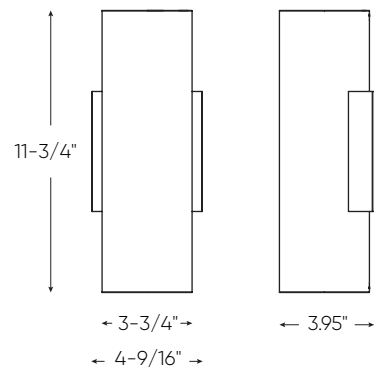

Specifications

Cylindrical housing made of extruded aluminum

Cylinder comes with 3 optical options:

- Bright aluminum reflector that provides a 45° beam spread
- Frosted glass lens to allow a wider beam spread
- Die-cast aluminum cap to allow a down light only version

Baked powder paint coat for a highly durable finish

5-year warranty

Finish

● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

BROOKLYN

The key design element of our LED square cylinder is the removable lens, which allows for three distinctive styles during installation.



3000k

COLOR TEMPERATURE



WET


ADA
COMPLIANT

T24
JA8
CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-B	11-3/4"	28 W	2100 lm	90	3000 K	120 V - 277 V

LEDWALL-B

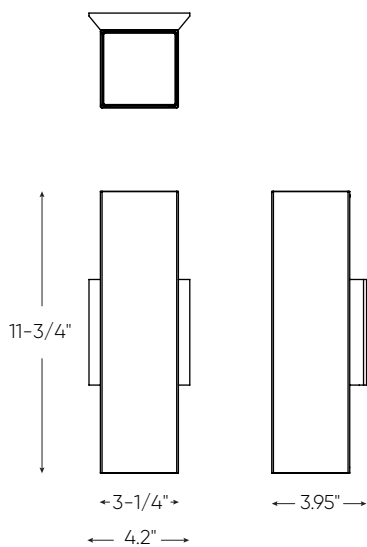

Specifications

Cylindrical housing made of extruded aluminum

Cylinder comes with 3 optical options:

- Bright aluminum reflector that provides a 45° beam spread
- Frosted glass lens to allow a wider beam spread
- Die-cast aluminum cap to allow a down light only version

Baked powder paint coat for a highly durable finish

5-year warranty

Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

EDINBURGH

European inspiration is made prevalent in this LED wall mount. Indirect lighting allows for a uniform and even light output that will enhance every application.



3000k

COLOR TEMPERATURE

WET


ADA
COMPLIANT

ETL
US
Intertek

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-E	13-3/4"	12 W	870 lm	90	3000 K	120 V



LEDWALL-E

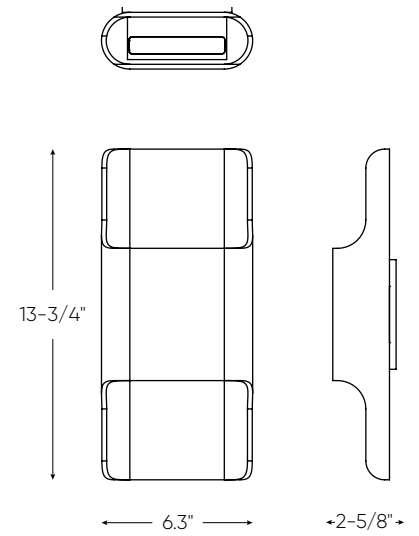

Specifications

Made of extruded aluminum
Fully sealed light engine
Unique up and down lighting output
Low profile design
Integrated dimmable driver
5-year warranty

Finish

● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

SHIELD

These 5" and 7" dark-sky friendly wall fixtures offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.



COLOR TEMPERATURE



WET



DARK SKY FRIENDLY



PHOTOCELL



DSWC05-CC

DSWC07-CC-V




Photocell


The photocell feature automatically adjusts to changing light conditions, providing energy-efficient illumination without requiring manual control.

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DSWC05-CC	5"	16 W	1200 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
DSWC07-CC-V	7"	24 W	2000 lm	90	2700, 3000, 3500, 4000, 5000 K	V: 120 / 277 / 347V 0-10V dimming

DSWC05-CC

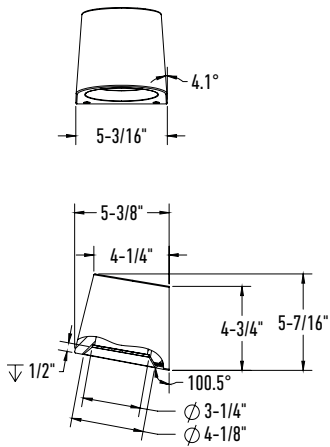

DSWC07-CC-V

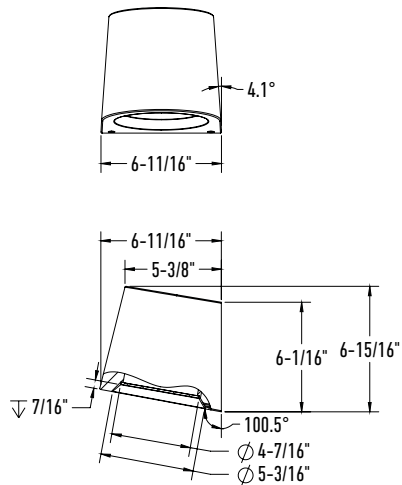

Specifications

Die-cast aluminum housing
Switch-selectable CCT
Integrated photocell for automatic lighting control
Integrated dimmable driver
Installs in a standard electrical junction box
5-year warranty

Finish

● **BK** Black


Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



GENEVA

Imagine being able to manually control the amount of light spread coming from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



ADA
COMPLIANT



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-G-CC	4-1/2"	14 W	600 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V



Specifications

Made of extruded aluminum
 Separately adjustable up and down lighting
 Easily adjustable lighting angle from 0° to 92°
 Superior color consistency
 Directional lighting
 Integrated dimmable driver
 5-year warranty


Finish

● **BK** Black
 ○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

LEDWALL-G-CC



HARLOW

This distinctive LED wall-mounted sconce permeates a gentle multi-directional light. Its unique geometric shape and robust design will provide a dramatic flare to any indoor/outdoor space. Ideal for residential and commercial projects, its warm splashes of light create an impressive architectural and alluring touch.



3000k

COLOR TEMPERATURE



WET

ADA
COMPLIANT



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-H	6"	15 W	900 lm	90	3000 K	120 V



Specifications

Made of extruded aluminum
Fully sealed light engine
Unique up and down lighting output
Integrated dimmable driver
5-year warranty


Finish

● **BK** Black

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

LEDWALL-H



ALTO

The Alto blends light functionality with an opportunity for artistic creation. Combine multiple fixtures to create infinite compositions or simply use alone, the choice is yours.




ADA
COMPLIANT*




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SQS06-CC*	6"	8.5 W	550 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
SQS10-CC*	10"	13 W	800 lm			
SQSTP-CC	6"	3 W	190 lm			

SQS06




SQS10

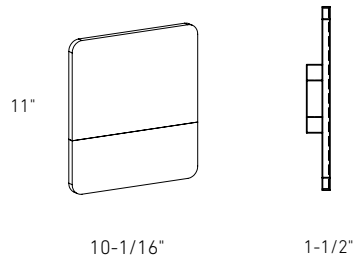

SQSXX-NUM

0123456789
0123456789
0123456789
0123456789
0123456789
- ABCDEFGH
IJKLMNOPQ
RSTUVWXYZ

SQSTP-CC

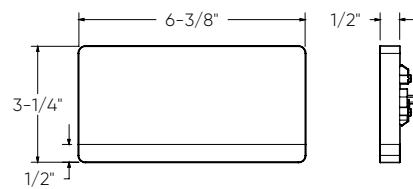

Specifications

Cast aluminum construction
Black adhesive character set included with wall sconce only
Low profile design
Switch-selectable CCT
Integrated dimmable driver
5-year warranty

Finish

- **BK** Black
- **WH** White (model SQSTP-CC only)

Accessories

SQS06-NUM-BK

An adhesive set of 50 numbers and 27 characters for the SQS06 wall sconce

SQS10-NUM-BK


An adhesive set of 50 numbers and 27 characters for the SQS10 wall sconce

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

CUBIX

Imagine being able to manually control the amount of light spread coming out from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



LEDWALL001D-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL001D-CC	4"	7 W	540 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V



Specifications

Up and down lighting
Easily adjustable lighting angle
from 0° to 92°
Integrated dimmable driver
5-year warranty


Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


LEDWALL001D-CC

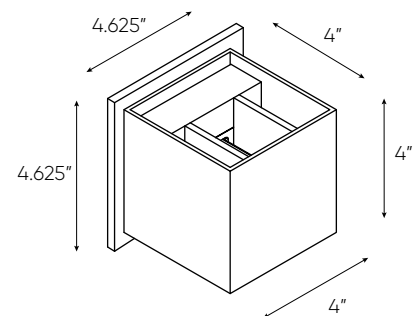

NEW

RISE

This 12" horizontal step light features a streamlined design, offering both uniform illumination and a modern, minimalist aesthetic for stairways and pathways.



LSTP12-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSTP12-CC	12"	10 W	300 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V



Specifications

Die-cast aluminum housing
 Switch-selectable CCT
 Integrated dimmable driver
 Fits in 2x3 junction boxes or octagonal
 junction boxes
 5-year warranty


Finish

● **BK** Black

Note


Other color temperatures, finishes, and
 voltage options are available but may require
 minimum order quantities (MOQs) and
 longer lead times. Please contact your DALI
 representative for more information.

LSTP12-CC

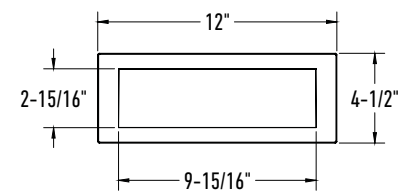

ECHO

Inspiration will come in abundance once you try our LED accent step lights. Use them outdoors on your deck or on the stairs inside your home. You will be truly impressed by the effect!



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDSTEP002D-CC	4-3/4"	3 W	75 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V



Specifications

Die-cast aluminum housing
Switch-selectable CCT
Integrated dimmable driver
Install in standard electrical junction box
Ideal operating temperature:
-20° to 40° C
5-year warranty


Finish

● **BK** Black
○ **WH** White

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

LEDSTEP002D-CC



PEARL

The simplicity of this design allows for the highest level of flexibility when choosing your application. Light glowing from all directions creates the perfect ambiance for every setting.





LEDSTEP004D-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDSTEP004D-CC	3-1/4"	3 W	50 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V



LEDSTEP004D-CC



Specifications

Die-cast aluminum housing
Switch-selectable CCT
Integrated dimmable driver
Includes a junction box approved for concrete applications
5-year warranty

Finish


● **BK** Black
○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

CAMBER

The innovation of this design comes from its recessed installation. This step light will be perfectly integrated into stairs and can also be used on decks.



WET




LEDSTEP005D-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDSTEP005D-CC	4-3/4"	3 W	90 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V

LEDSTEP005D-CC

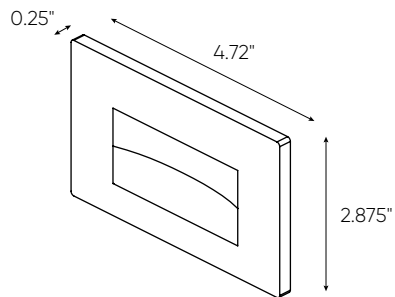

Specifications

Die-cast aluminum housing
Switch-selectable CCT
Integrated dimmable driver
Install in standard electrical junction box
5-year warranty

Finish


- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

ASCEND

This flat panel step light, designed for both indoor and outdoor use, combines modern elegance with robust functionality, casting a subtle and inviting glow to enhance safety and aesthetics in any space.




LEDSTEP005D-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSTP07-CC	4-3/4"	4 W	150 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V

LSTP07-CC

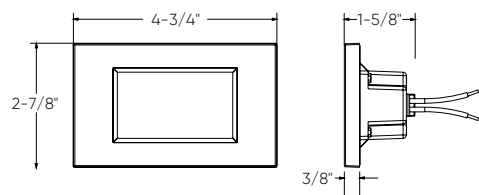

Specifications

Die-cast aluminum housing
Switch-selectable CCT
Integrated dimmable driver
Install in standard electrical junction box
5-year warranty

Finish










- **BK** Black
- **WH** White

Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


ACCESSORIES

FORMS GENERAL ACCESSORIES

		Model	Finish	Specifications
LENS COVER  DRY		LNACC-L16FT	White	<ul style="list-style-type: none"> 16-foot lens for Boulevard series pendants, flush mounts and recessed linears
GLASS DOME  DRY		GL-CFG13	-	<ul style="list-style-type: none"> Frosted glass dome replacement for CFG13-CC flush mount
CHARACTER SET  WET	0123456789 0123456789 0123456789 0123456789 0123456789 -ABCDEFGHIJ KLMNOPQR STUVWXYZ	SQS06-NUM-BK SQS10-NUM-BK SQS15-NUM-BK	Black	<ul style="list-style-type: none"> Adhesive Set: Includes 50 numbers and 27 characters, specifically designed for the SQS series wall sconces. SQS06-NUM-BK: Size per letter: 3 cm SQS10-NUM-BK: Size per letter: 5 cm SQS15-NUM-BK: Size per letter: 7cm
LENS REPLACEMENT  DRY		CAPD-ACCLL CAPD-ACCLS		<ul style="list-style-type: none"> Kit of 4 long lenses for CAPD72-CC 4-light pendant Kit of 4 short lenses for CAPD72-CC 4-light pendant
INTERNAL TRIM  WET		CYL05-TRIM-XX CYL06-TRIM-XX		<ul style="list-style-type: none"> 5" internal trim for CYL05-CC flush-mount cylinders, available in Alzac, Black, Gold, and White 6" internal trim for CYL06-CC flush-mount cylinders, available in Alzac, Black, Gold, and White



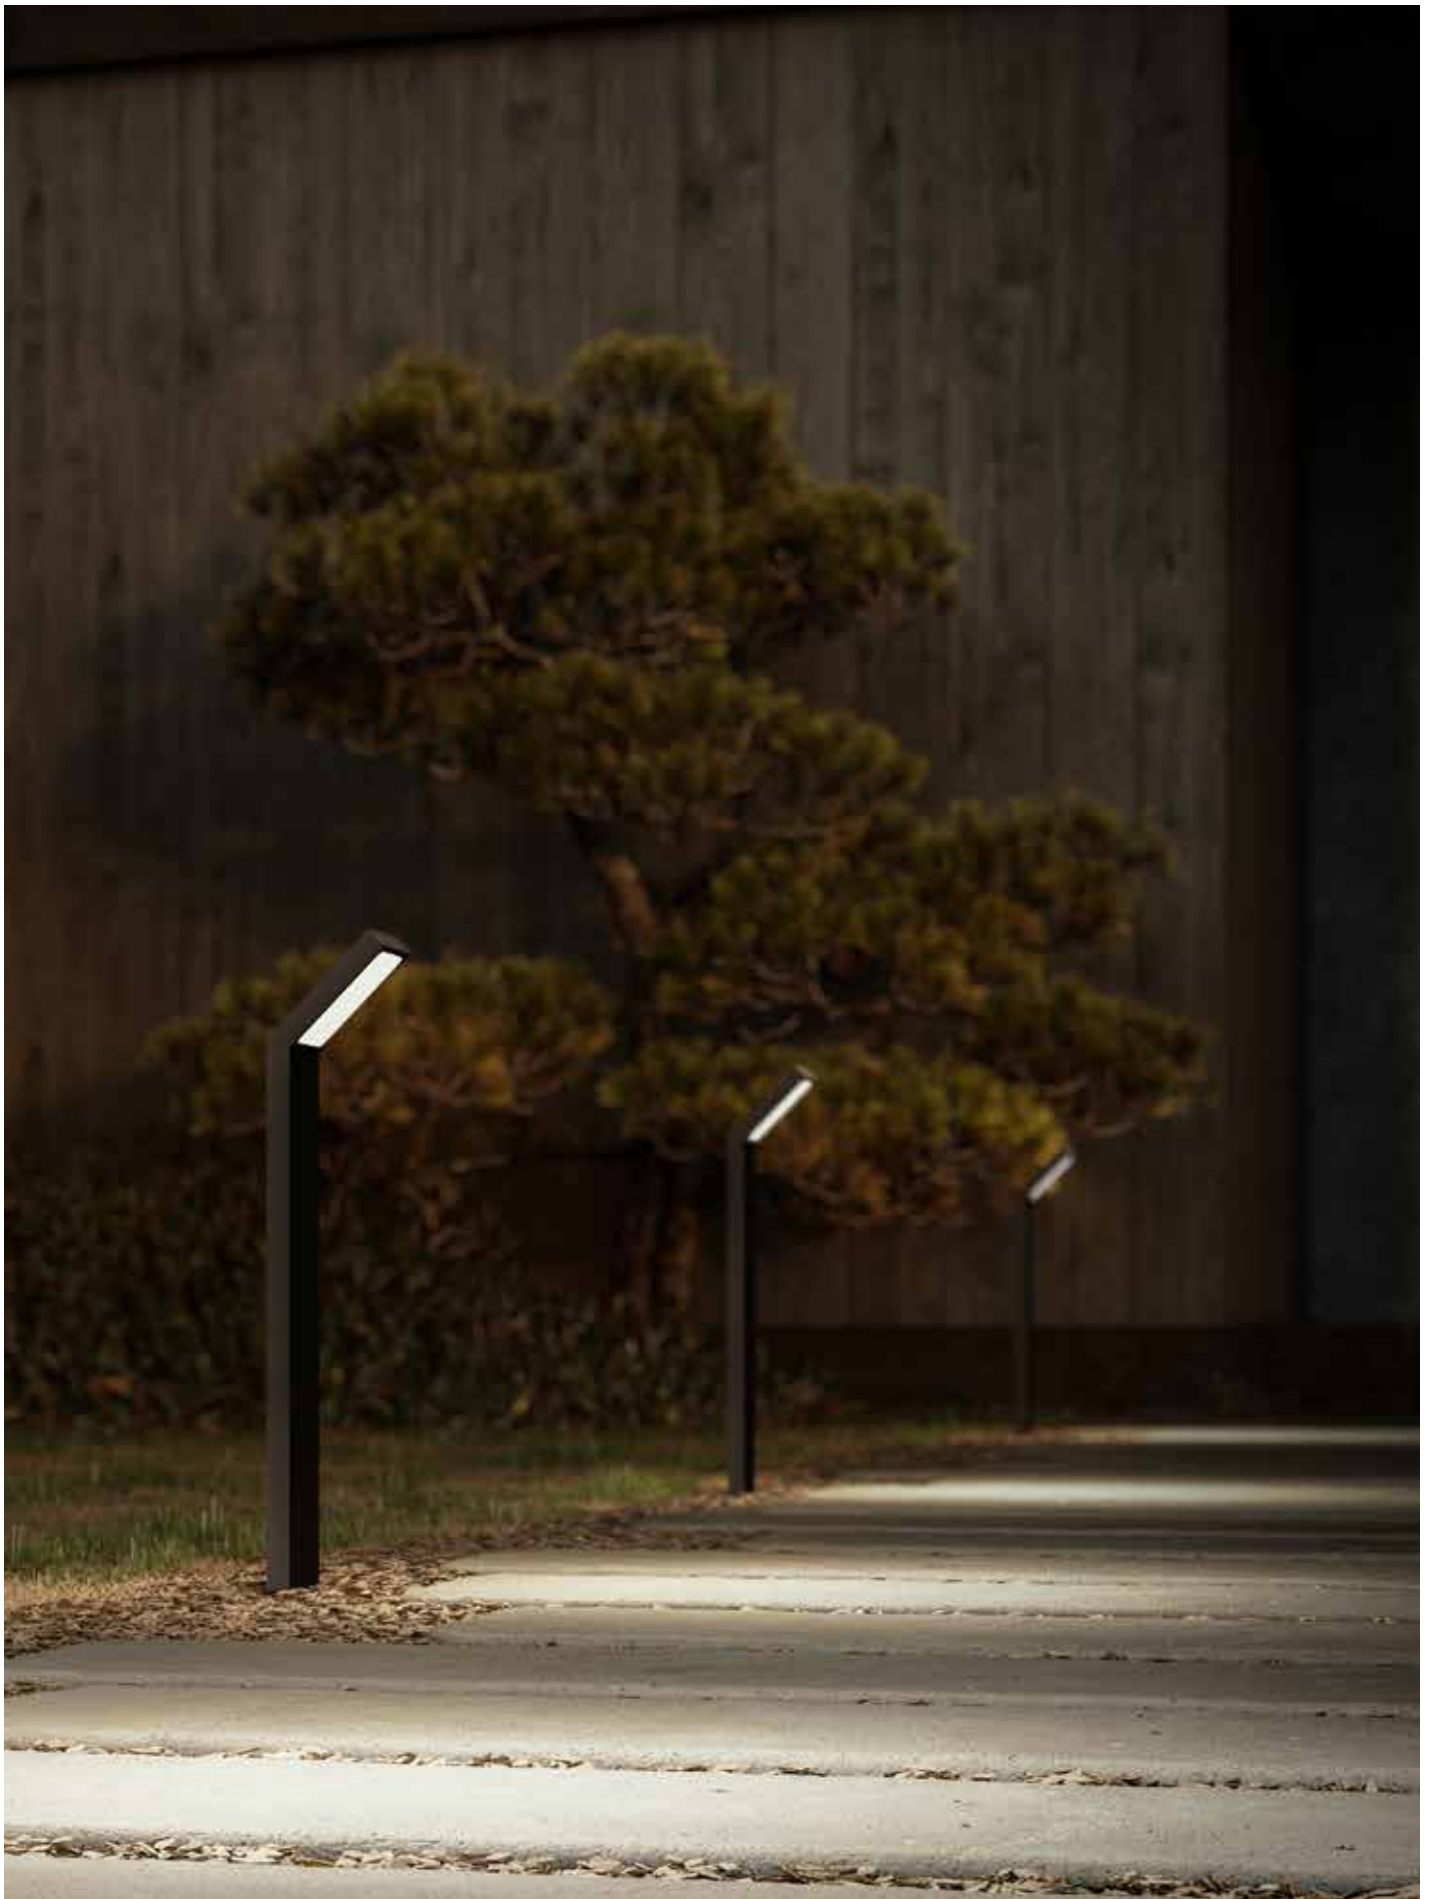

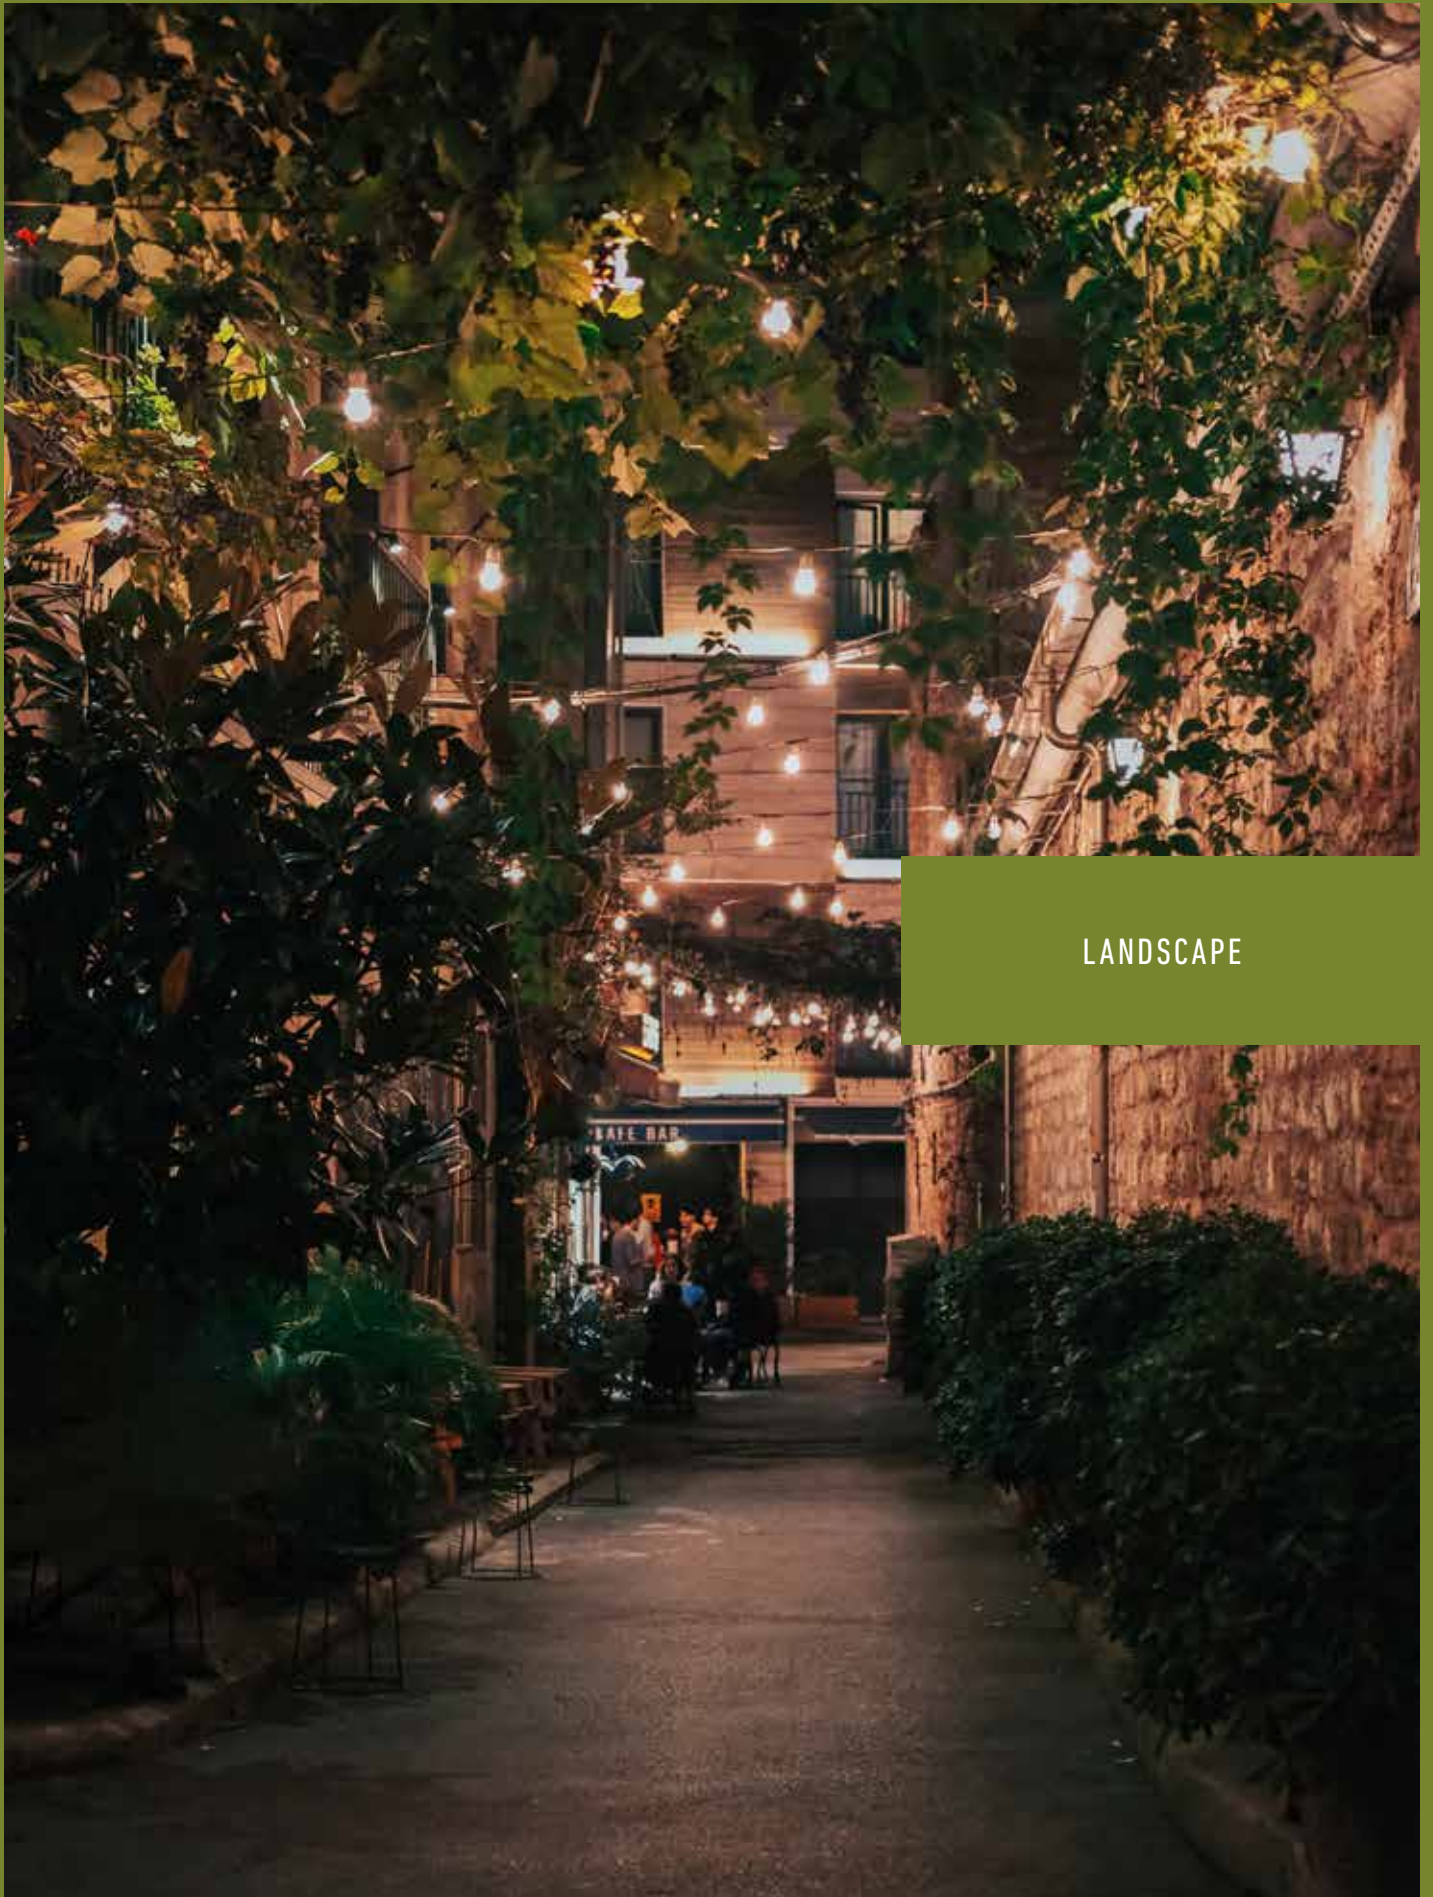

LANDSCAPE

12 V



247

CONNECTION
GUIDE



250

GLAM
RTL-3C



252

SLIM SPOT
LSS10-CC



254

SPOT
LSP3-CCL
LSP4-CCL



256

SOL
GRD2-CC



258

EDGE
LSQP-CC



260

FLUX
LPP20-CC



262

COLUMN
LRB20-CC
LRB30-CC



264

CONTOUR
LHS07-CC



266

TRANSFORMERS
LTRP-60
LTR-300

120 V



268

STATURE
LEDPATH004D

GENERAL



296

ACCESSORIES

24 V



272

SMART CONNECTION
GUIDE



276

CORE
DCP-TR60, DCP-TR200,
DCP-TR300



278

ORBIT
DCP-SPT6



280

GAÏA
DCP-CPL24



282

AXIS
DCP-STK20
DCP-STK50



284

ACUTE
DCP-45HP20



286

HORIZON
DCP-FLD30



288

MASON
DCP-BRK12



290

FLEX
DCP-NFTAP5M



292

ORION
DCP-STG48



294

KAYU
DCP-RK10
DCP-RK18



297

ACCESSORIES

How to create

A low-voltage landscape lighting plan

The three main components



A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoor-rated **GFCI** electrical outlet.

**Avoid mounting the transformer in shady areas, this could interfere with the "dusk-to-dawn" photoelectric cell.*

**Should be installed at least 36" (3 feet) off the ground.*



B. Landscape lighting fixtures

- Integrated LED spot lights, path lights, and bollards.
- Powered by the transformer

**When you choose lights, add up the total wattage they consume. You'll need this number for choosing other parts of your landscape lighting system.*




C. Landscape lighting wire

- The wire connecting the transformer to the light fixtures.
- Rated according to the size of its conductor (gauge)


**A 12-gauge wire is larger and can handle more wattage than a 14-gauge wire.*

**Selecting the right wire size is important and will prevent any issues down the road.*


Transformers



60W




300W



Path lights

These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.



Spot lights

Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.



Bollards

Use these lights to enhance the look of your yard while making walkways obvious at night.



Landscape wire

Versatile 12, 14, and 16 gauge low-voltage wire for spot lights, path lights, and bollards.



Mix it up! Different types of fixtures can be connected together.

The four steps for an LED landscape installation



Check your LED fixtures' voltage requirements. We strongly recommend verifying the voltage at each fixture with a voltmeter before finalizing and burying your installation.

1. Map out a plan

- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.


2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.

3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. However, the total wattage of your lights should be 20 percent less than the transformer's rated wattage.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the fixtures.

Sample 12V Lighting Layout

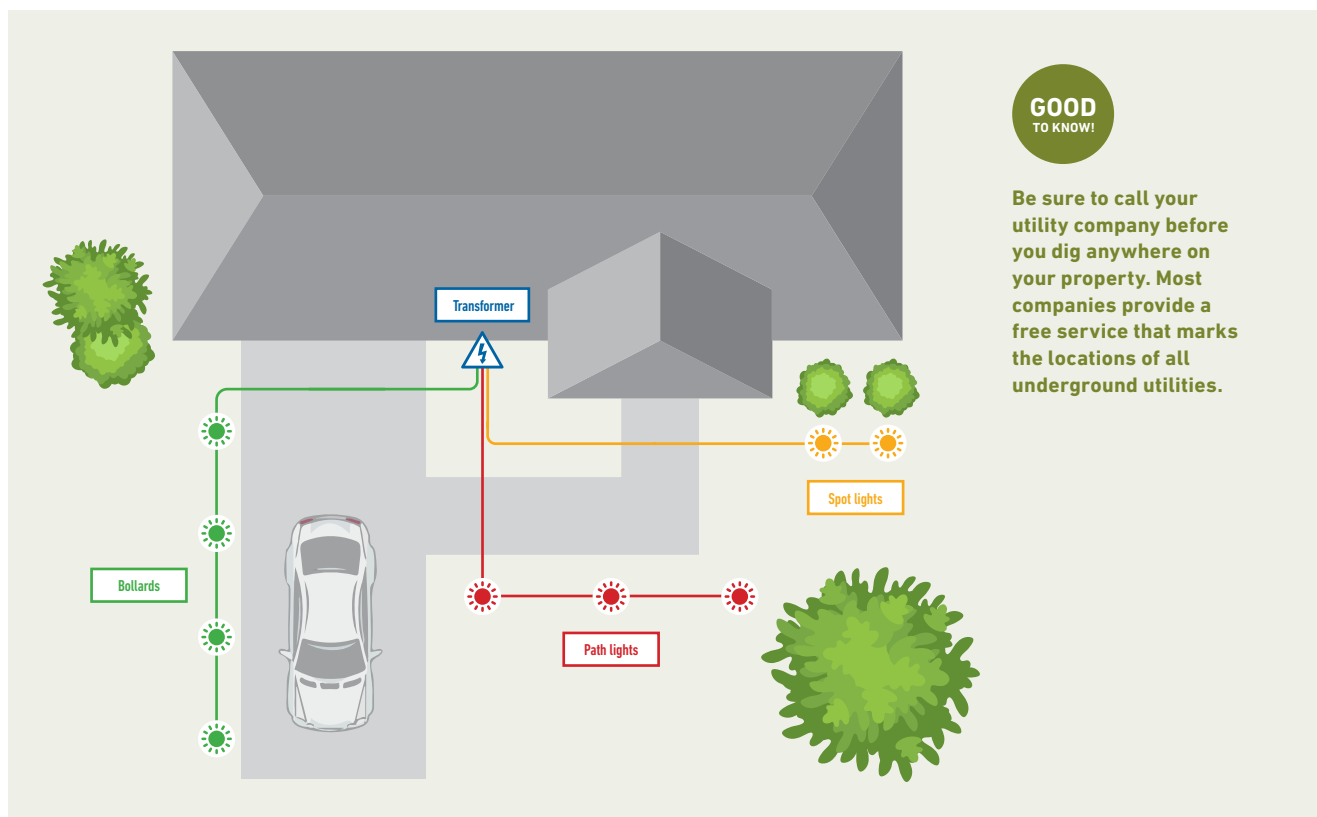



Safe! Low-voltage lighting installations are much safer than 120V systems, with a significantly lower risk of electric shock and fire hazards.

4. Wiring

Now you need to provide power to the fixtures. The length of runs helps determine what gauge of wire to buy. As a general rule, try to keep the runs under 50 feet with a maximum of 8 fixtures per run. Lower loads per run means lower voltage drop.

What is Voltage Drop?

Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 1.5-volt drop should be corrected.

Minimize voltage drop and reduce wasted wire by using one of the wiring methods below:

Daisy Chain (A)


Connects all fixtures in a linear fashion, where the first fixture connects to the transformer.

T-Method (B)


Similar to the Daisy Chain method, except the transformer connects to the middle of the chain

Hub Method (C)

All fixtures run through a hub junction and are connected to a single line from the transformer, ensuring each fixture receives an equal share of voltage

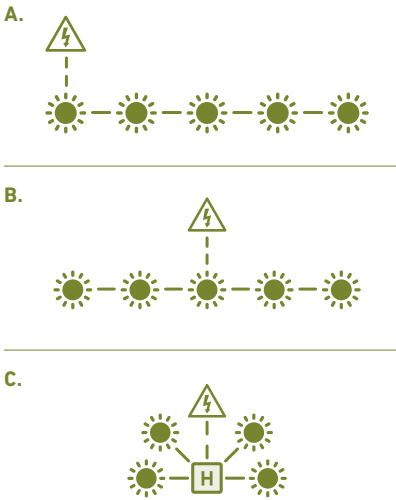


Sample 12V Wiring Diagram

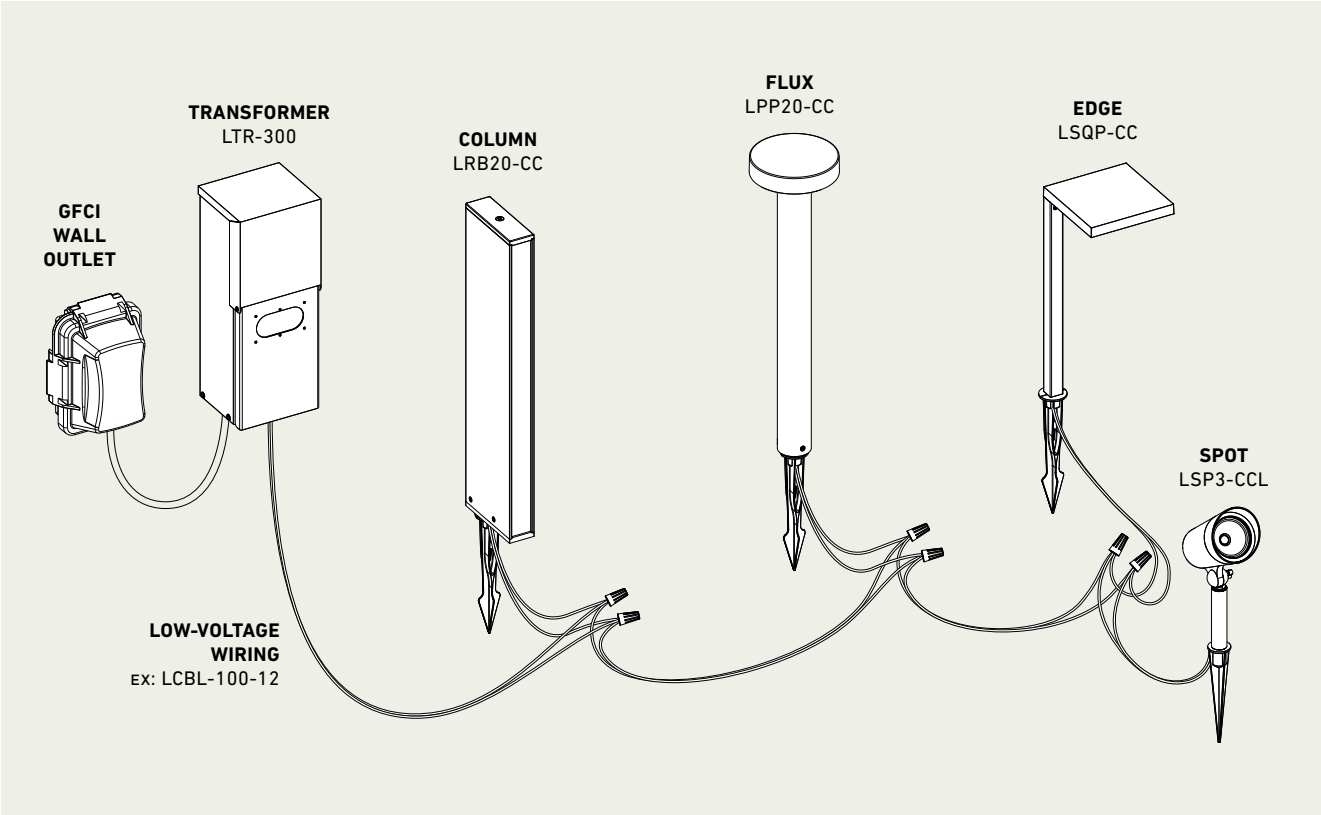

GLAM

This rechargeable table lamp, featuring three color temperature settings and stepless dimming functionality, offers versatile lighting with a long-lasting 10-hour battery life.




RTL-3C



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RTL-3C	14"	2 W	220 lm	80	2200, 2700, 3000 K	5 V



RTL-3C

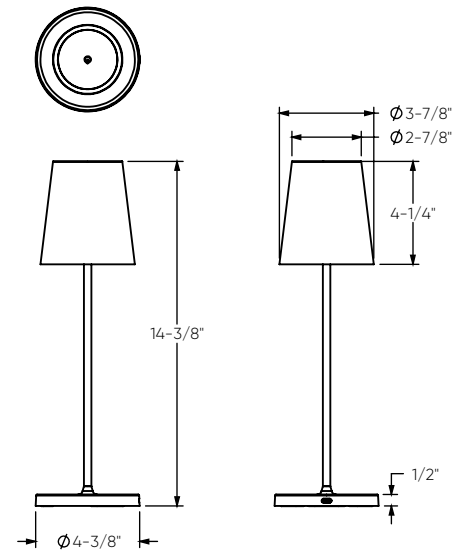

Specifications

USB-C input/charge
Button-selectable CCT
98° beam angle
Smooth stepless dimming
5-year warranty

Finish


- **BK** Black
- **SA** Sage green
- **WH** White

Note

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.




SLIM SPOT

Illuminate your outdoor landscape with precision using this 12V spotlight, featuring a narrow 10° beam angle for focused and impactful lighting.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSS10-CC	5-1/2"	10 W	370 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC

LSS10-CC

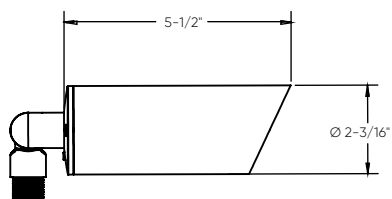

Specifications

180° swiveling head
Ground stake included
10° beam angle
Switch-selectable CCT
5-year warranty

Note

Low-voltage transformer required.
Sold separately.
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK
60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK
300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Accessories

LAN-ACC-MS
6-3/4" metal ground stake

LSP-EXT04
4" extension arm

LSP-WM
Spotlight wall mount adapters

LCBL-50-16
50 feet of 16 gauge low-voltage wiring

LCBL-100-16
100 feet of 16 gauge low-voltage wiring

LCBL-50-14
50 feet of 14 gauge low-voltage wiring

LCBL-100-14
100 feet of 14 gauge low-voltage wiring

LCBL-100-12
100 feet of 12 gauge low-voltage wiring

LCBL-200-12
200 feet of 12 gauge low-voltage wiring

SPOT


This durable, fully sealed 12V LED landscape spot is constructed of solid aluminum. It includes an integrated LED module that emits a cool, natural, or warm white light in multiple beam patterns, all selectable with a 5CCT switch. Can be rotated 180° and equipped with a glare shield for pinpoint accuracy. The landscape spotlight is great for gardens, tree uplighting, architectural lighting, and more.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSP3-CCL	3"	10 W	500 lm	80	2200, 2700, 3000,	12 VAC
LSP4-CCL	4"	20 W	1000 lm		3500, 4000 K	



LSP3-CCL

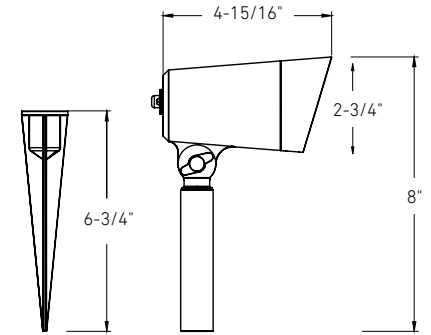

LSP4-CCL

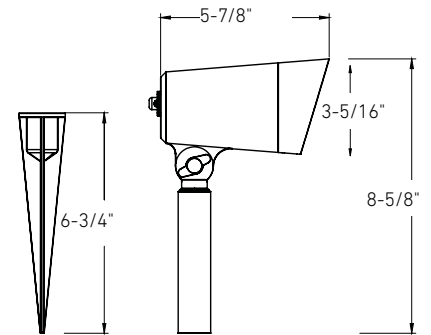

Specifications

Switch-selectable CCT
Easy-access CCT switch on back of spot
Interchangeable 20°, 40°, and 90° beam angle lens
180° swiveling head
Ground stake included
5-year warranty

Finish

● **BK** Black

Power supplies

LTRP-60-BK
60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK
300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Note

Low-voltage transformer required.
Sold separately.
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

LAN-ACC-MS
6-3/4" metal ground stake

LSP-EXT04
4" extension arm

LSP-WM
Spotlight wall mount adapters

LCBL-50-16
50 feet of 16 gauge low-voltage wiring

LCBL-100-16
100 feet of 16 gauge low-voltage wiring

LCBL-50-14
50 feet of 14 gauge low-voltage wiring


LCBL-100-14
100 feet of 14 gauge low-voltage wiring

LCBL-100-12
100 feet of 12 gauge low-voltage wiring

LCBL-200-12
200 feet of 12 gauge low-voltage wiring

SOL

This durable, fully sealed 12V LED recessed ground light features an integrated LED module that provides cool, natural, or warm white light, all adjustable via a 5CCT switch. It is ideal for uplighting, wall washing, pathways, garden accents, and architectural highlights.



WET


IP67
RATED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
GRD2-CC	2"	9 W	600 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC



GRD2-CC



Specifications

Switch-selectable CCT
IP67-rated products are dustproof and can withstand immersion in water up to 1 meter for 30 minutes
Can be recessed or surface mounted
Includes a mounting housing
30° beam angle
5-year warranty

Finish

● **BK** Black

Power supplies

LTRP-60-BK
60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK
300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Note

Low-voltage transformer required.
Sold separately.
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

LCBL-50-16
50 feet of 16 gauge low-voltage wiring

LCBL-100-16
100 feet of 16 gauge low-voltage wiring

LCBL-50-14
50 feet of 14 gauge low-voltage wiring


LCBL-100-14
100 feet of 14 gauge low-voltage wiring

LCBL-100-12
100 feet of 12 gauge low-voltage wiring

LCBL-200-12
200 feet of 12 gauge low-voltage wiring

EDGE

A symmetrical luminaire made of rust-resistant aluminum and finished in a matte textured paint. Perfect for walkways, garden beds, or simply to direct the eye to some of your home's best features. Equipped with color-select technology that allows you to cast a particular color of light.





LSQP-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSQP-CC	12"	3 W	265 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC

LSQP-CC

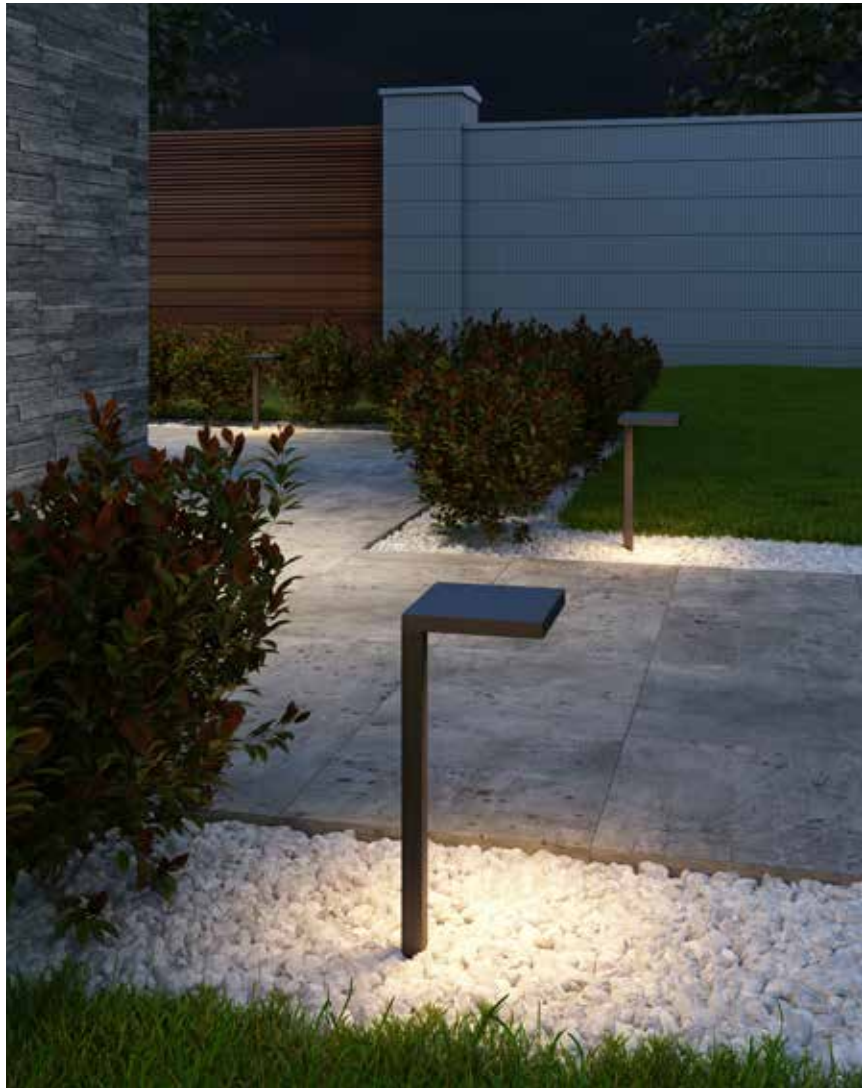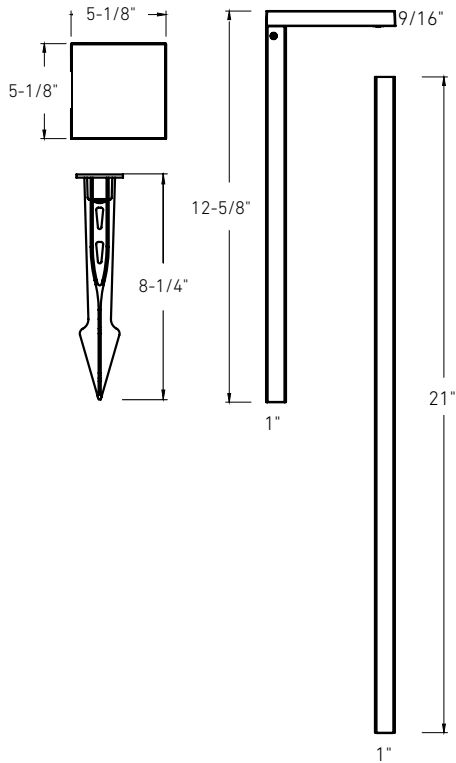

Specifications

Ground stake included
90° beam angle
Switch-selectable CCT
21" extension tube included
5-year warranty

Note

Low-voltage transformer required.
Sold separately.
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK
60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK
300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16
50 feet of 16 gauge low-voltage wiring

LCBL-100-16
100 feet of 16 gauge low-voltage wiring

LCBL-50-14
50 feet of 14 gauge low-voltage wiring


LCBL-100-14
100 feet of 14 gauge low-voltage wiring

LCBL-100-12
100 feet of 12 gauge low-voltage wiring

LCBL-200-12
200 feet of 12 gauge low-voltage wiring

FLUX

Add visual interest to your garden with the Flux outdoor path light. A 360° light spread and cast aluminum construction with a powder-coated finish fits best along pathways, garden beds, and walkways.




LPP20-CC



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LPP20-CC	20"	8 W	360 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC



LPP20-CC

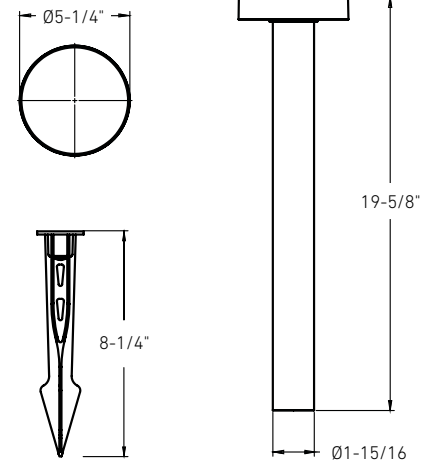

Specifications

Ground stake included
93° beam angle
Can be mounted to wood or concrete (screws not included)
Switch-selectable CCT
5-year warranty

Note

Low-voltage transformer required.
Sold separately.
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times.
Please contact your DALI representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK
60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK
300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16
50 feet of 16 gauge low-voltage wiring

LCBL-100-16
100 feet of 16 gauge low-voltage wiring

LCBL-50-14
50 feet of 14 gauge low-voltage wiring


LCBL-100-14
100 feet of 14 gauge low-voltage wiring

LCBL-100-12
100 feet of 12 gauge low-voltage wiring

LCBL-200-12
200 feet of 12 gauge low-voltage wiring


COLUMN

The Column series, a robust rectangular bollard that features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, it provides a chic solution to eco-conscious homeowners.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LRB20-CC	20"	12 W	600 lm	80	2200, 2700, 3000,	12 VAC
LRB30-CC	30"	13 W	700 lm		3500, 4000 K	

LRB20-CC

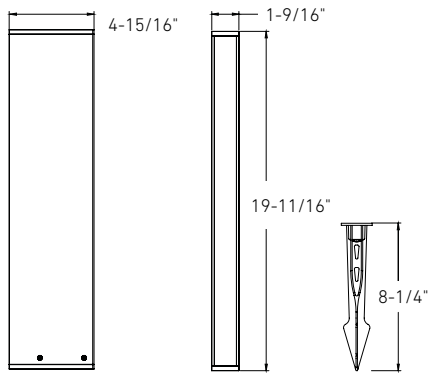

LRB30-CC

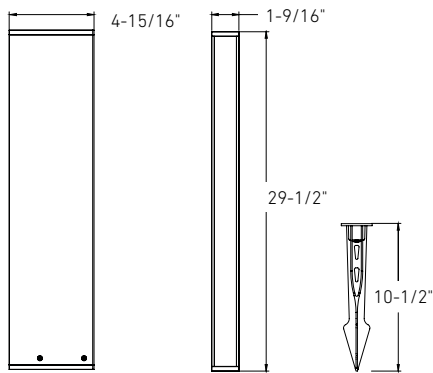

Specifications

Ground stake included
108° beam angle
Can be mounted to wood or concrete
using the included mounting bracket
(screws not included)
Switch-selectable CCT
5-year warranty

Finish

● **BK** Black

Power supplies

LTRP-60-BK

60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK

300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage
transformer

Note

Low-voltage transformer required.
Sold separately.

Other color temperatures and finish options
are available but may require minimum order
quantities (MOQs) and longer lead times.
Please contact your DALI representative for
more information.

Accessories

LCBL-50-16

50 feet of 16 gauge low-voltage wiring

LCBL-100-16

100 feet of 16 gauge low-voltage wiring

LCBL-50-14

50 feet of 14 gauge low-voltage wiring

LCBL-100-14

100 feet of 14 gauge low-voltage wiring

LCBL-100-12


100 feet of 12 gauge low-voltage wiring

LCBL-200-12

200 feet of 12 gauge low-voltage wiring

CONTOUR


The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LHS07-CC	7"	3 W	200 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC



LHS07-CC

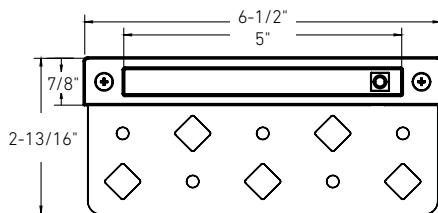

Specifications

110° beam angle
Can be mounted to wood or concrete
Surface or recessed installation
Switch-selectable CCT
5-year warranty

Finish

● **BK** Black

Power supplies

LTRP-60-BK

60W, 120VAC 60Hz input
12VAC output low-voltage transformer

LTR-300-BK

300W, 120VAC 60Hz input
12/13/14/15VAC output low-voltage transformer

Note

Low-voltage transformer required.
Sold separately.

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

Accessories

LCBL-50-16

50 feet of 16 gauge low-voltage wiring

LCBL-100-16

100 feet of 16 gauge low-voltage wiring

LCBL-50-14

50 feet of 14 gauge low-voltage wiring

LCBL-100-14

100 feet of 14 gauge low-voltage wiring

LCBL-100-12

100 feet of 12 gauge low-voltage wiring

LCBL-200-12

200 feet of 12 gauge low-voltage wiring

LOW-VOLTAGE TRANSFORMERS



Outdoor low-voltage transformers with timer and photocell sensor, 120V AC to 12V/13V/14V/15V AC, weatherproof.

LTR-300


LTRP-60



Model

LTRP-60-BK

60W low-voltage transformer

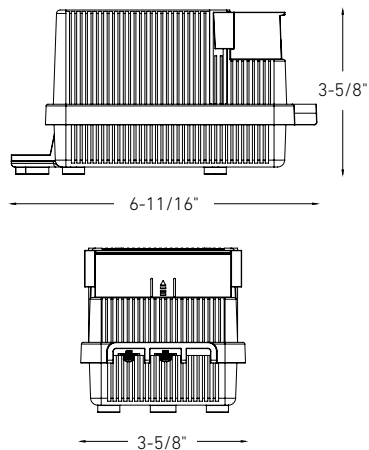

Specifications

Constant voltage mode power supply
Protection: short circuit / Over voltage
Input voltage: 120VAC 60Hz
Output voltage: 12VAC
Output Power: 60W
Maximum recommended load: 80%
Operating temperature: -30°C to 45°C
UL certification
5 year warranty


Finish

● **BK** Black

Model

LTR-300-BK

300W low-voltage transformer

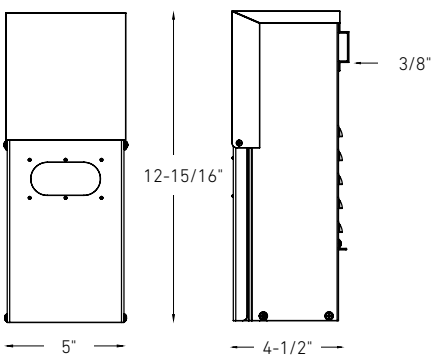

Specifications

Constant voltage mode power supply
Protection: short circuit / Over voltage
Fully isolated metal case -
Cooling by air convection
Input voltage: 120VAC 60Hz
Output Power: 300W
Output voltage: 12, 13, 14, 15VAC
Photocell sensor
Maximum recommended load: 80%
Operating temperature: -30°C to 45°C
UL certification
5 year warranty

Finish


● **BK** Black


STATURE


Add warm light to your outdoor landscape with this contemporary bollard. A modern statement, the Stature series features integrated LED's to ensure a long-lasting, energy-efficient, and maintenance-free illumination.

3000k

COLOR TEMPERATURE


WET



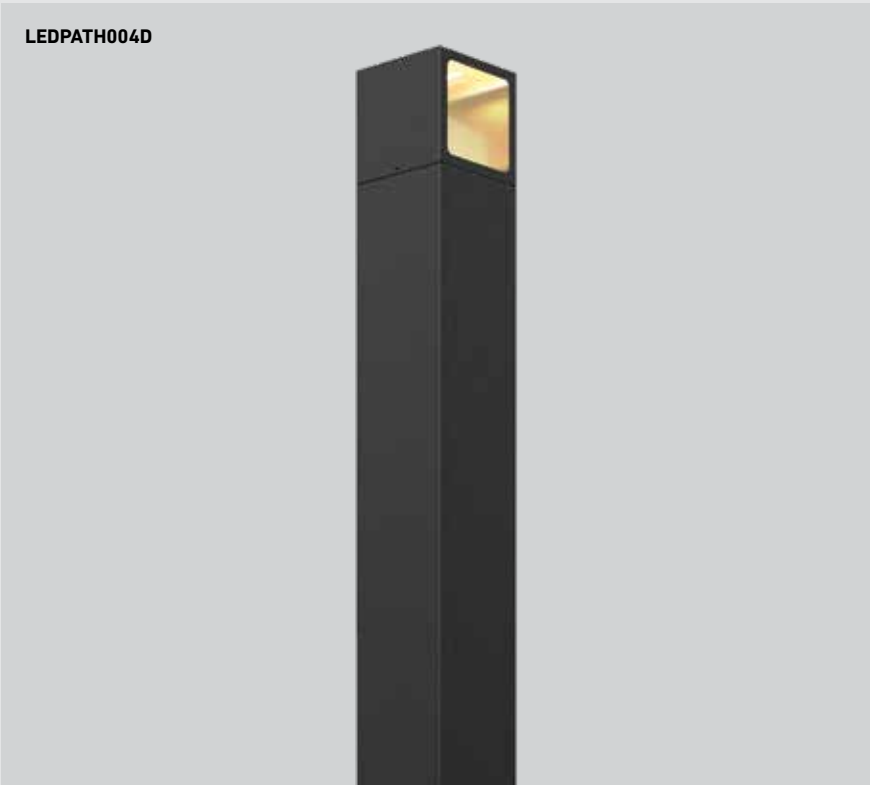

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDPATH004D	36"	7.5 W	350 lm	90	3000 K	120 V



Specifications

Integrated dimmable driver
Anchor bolts included
5-year warranty


Finish

- **BK** Black
- **SG** Silver grey

Note

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

LEDPATH004D








How to create

A Dals Connect PRO Smart Landscape Plan

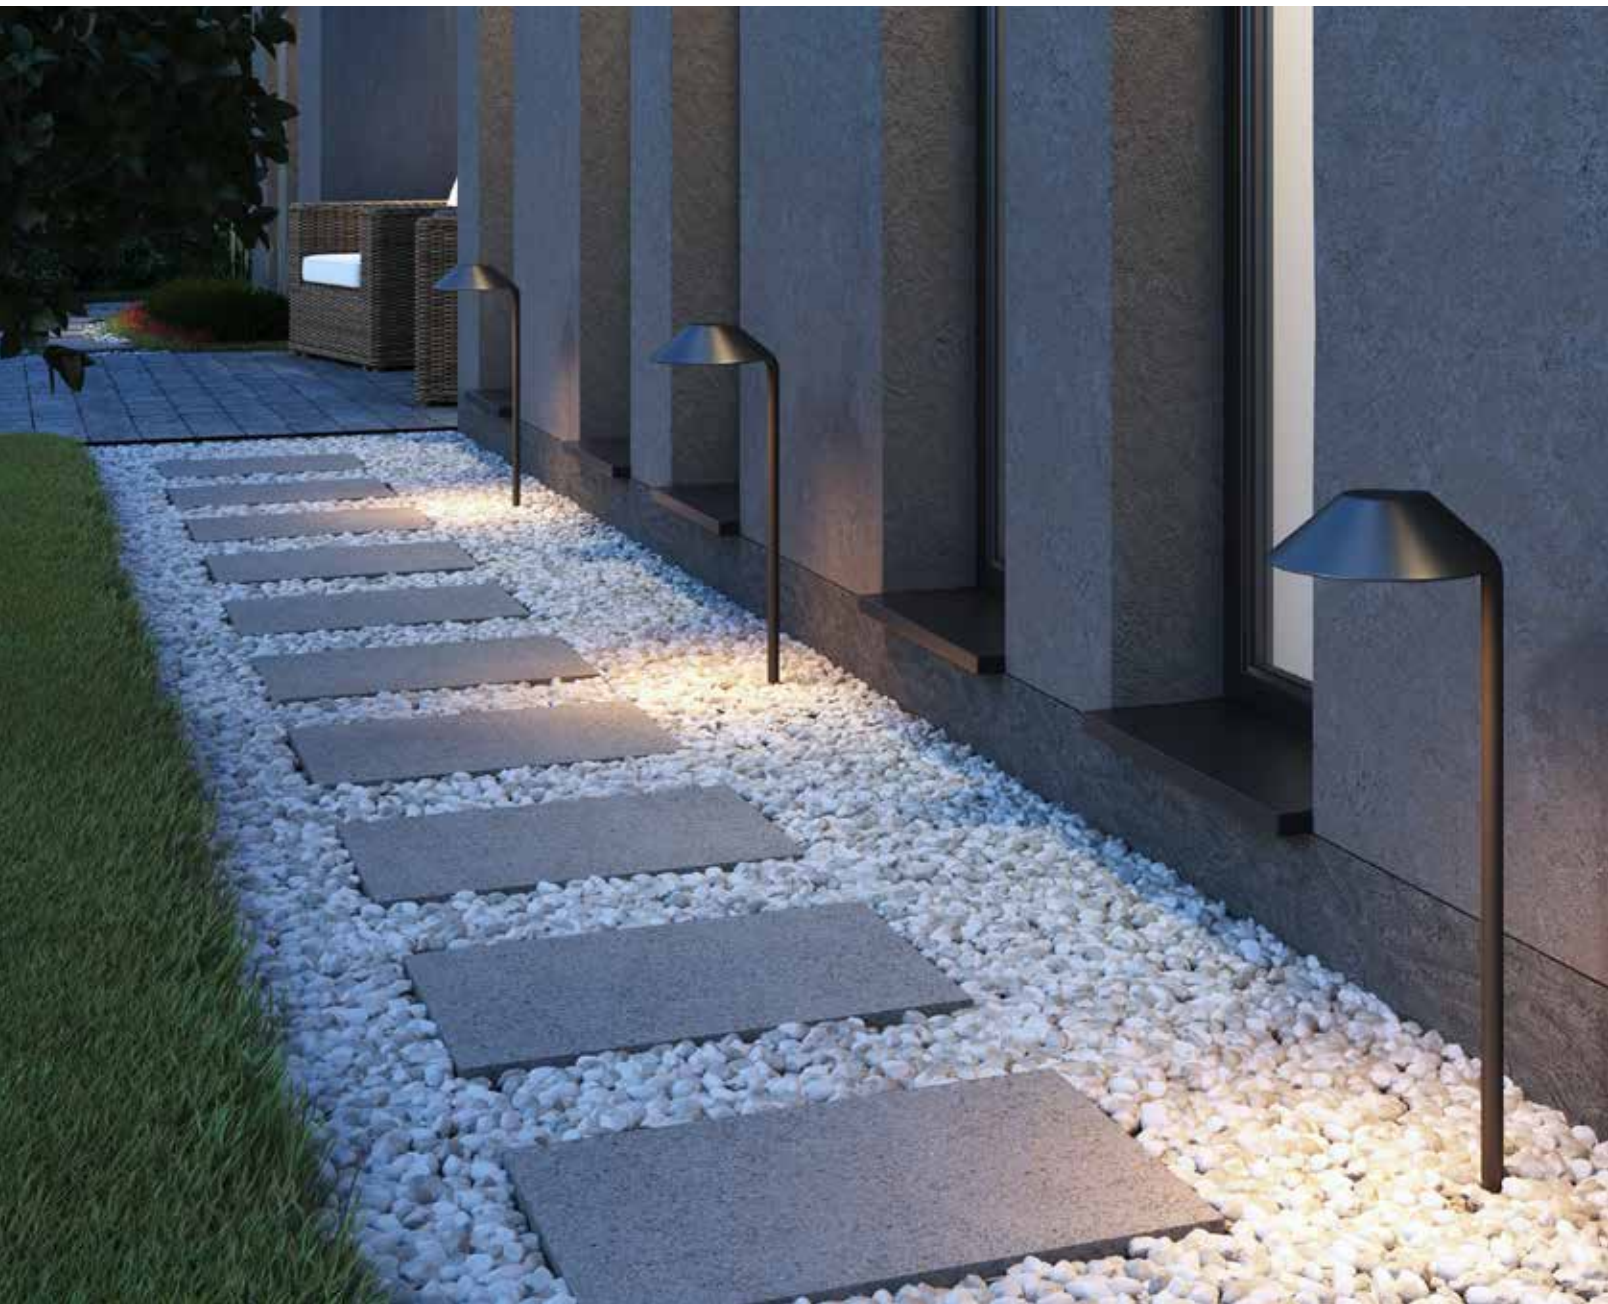

The main components



A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoor-rated gfcı electrical outlet.
- * Avoid mounting the transformer in an area with poor Wi-Fi reception.
- * Should be installed at least 36" (3 feet) off the ground.




B. Landscape lighting fixtures

- Dals Connect PRO integrated LED spot lights, path lights, flood light, step light, stick light or ground light.
- Powered by the transformer
- * When you choose lights, add up the total wattage they consume. You'll need this number for choosing the right transformer for your system.




Mix it up! Different types of Dals Connect PRO fixtures can be paired together with your smart landscape

Transformers




These 24V transformers come in three power capacities, 60W, 200W and 300W. An integrated PRO hub is also included.

Plug-in Transformer & Dals Connect PRO Hub




Use the 36W DC adapter paired with a PRO Hub for smaller landscape projects

Plug-in Transformer




Use the 36W DC adapter paired without a hub for smaller landscape projects with local controls.

Path lights



These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.

Spot lights



Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.

Stick lights



Use these lights to enhance the look of your yard while making walkways obvious at night.

Step Light




These fixtures can be surface-mounted to most surfaces, offering a soft glow that enhances visibility and style below.

Rock Light



Add a touch of magic to your landscape with these glowing rock fixtures, blending seamlessly into natural surroundings while providing soft, ambient lighting.

Flood Light



Use these lights to create wall washes or illuminate large areas of your yard.

The science behind your SMART landscape



Check your LED fixtures' voltage requirements. We strongly recommend verifying the voltage at each fixture with a voltmeter before finalizing and burying your installation.

1. Map out a plan

- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.
- You can also mark the spots on your land where the Wi-Fi signal drops on your phone, this will help determine the preferred spot for your transformer placement.


2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.
- Note how far away your Wi-Fi signal can reach.
- Check that all smart landscape products are within 30 feet of each other for maximum connectivity.
- We recommend pairing your smart landscape lights closer to the house first, and then move them to their desired location. An Internet connection is required for the first pairing.

3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. The total wattage cannot exceed the capacity of the transformer.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the first fixture and to your Wi-Fi.

Sample 24V Smart Lighting Layout

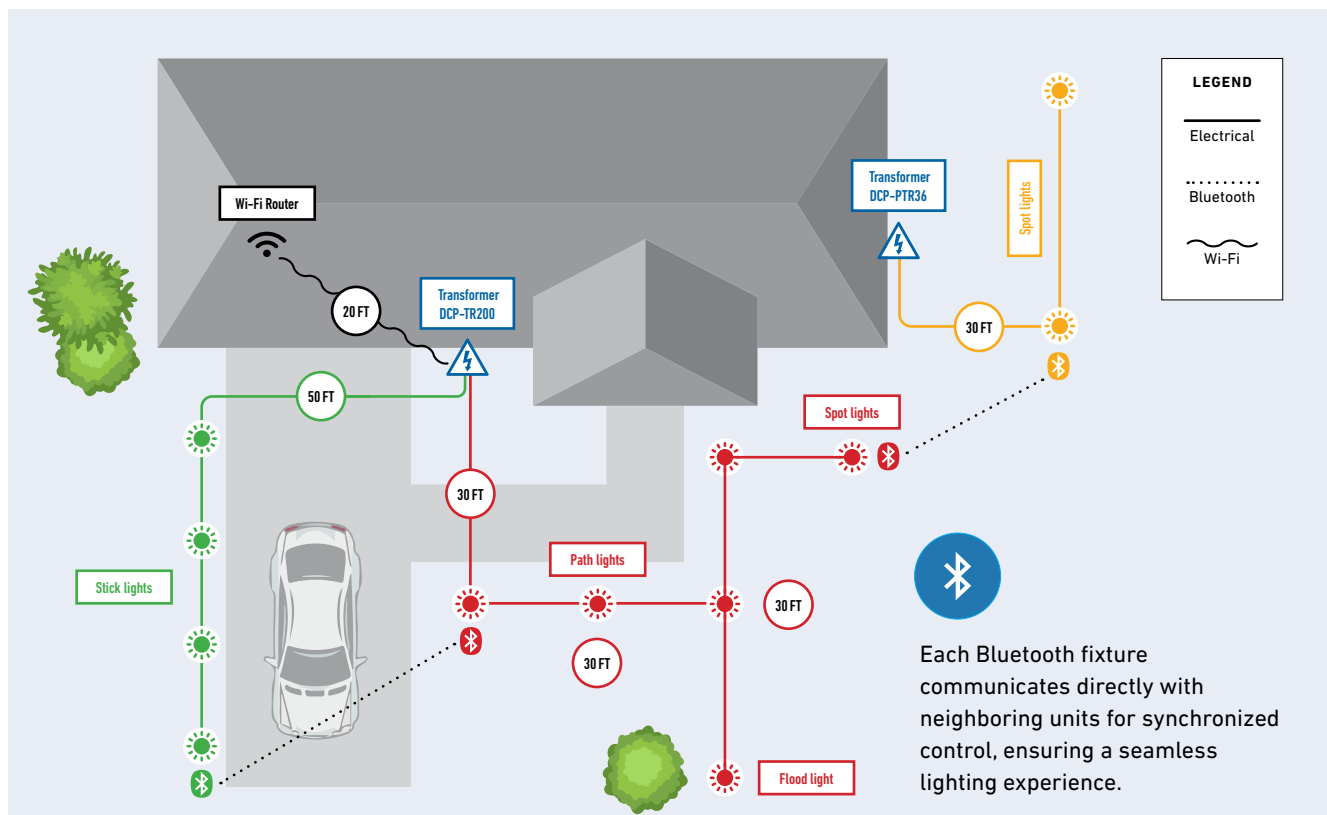



Be sure to call your utility company before you dig anywhere on your property. Most companies provide a free service that marks the locations of all underground utilities.

4. Wiring

To set up Dals Connect PRO smart landscape products, use low-voltage wiring (not included) and secure connections with marettes for a customizable installation.

What is Voltage Drop?


Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 2.5-volt drop should be corrected.

Checklist

Before you get ready to install your lights, make sure you have all the tools and accessories required. Below is a basic list of what you might need.

- Landscape lights
- Transformer
- Wire
- Tape measure
- Hardware for installing the transformer on a house or post
- Your Wi-Fi password

Sample 24V Smart Wiring Diagram

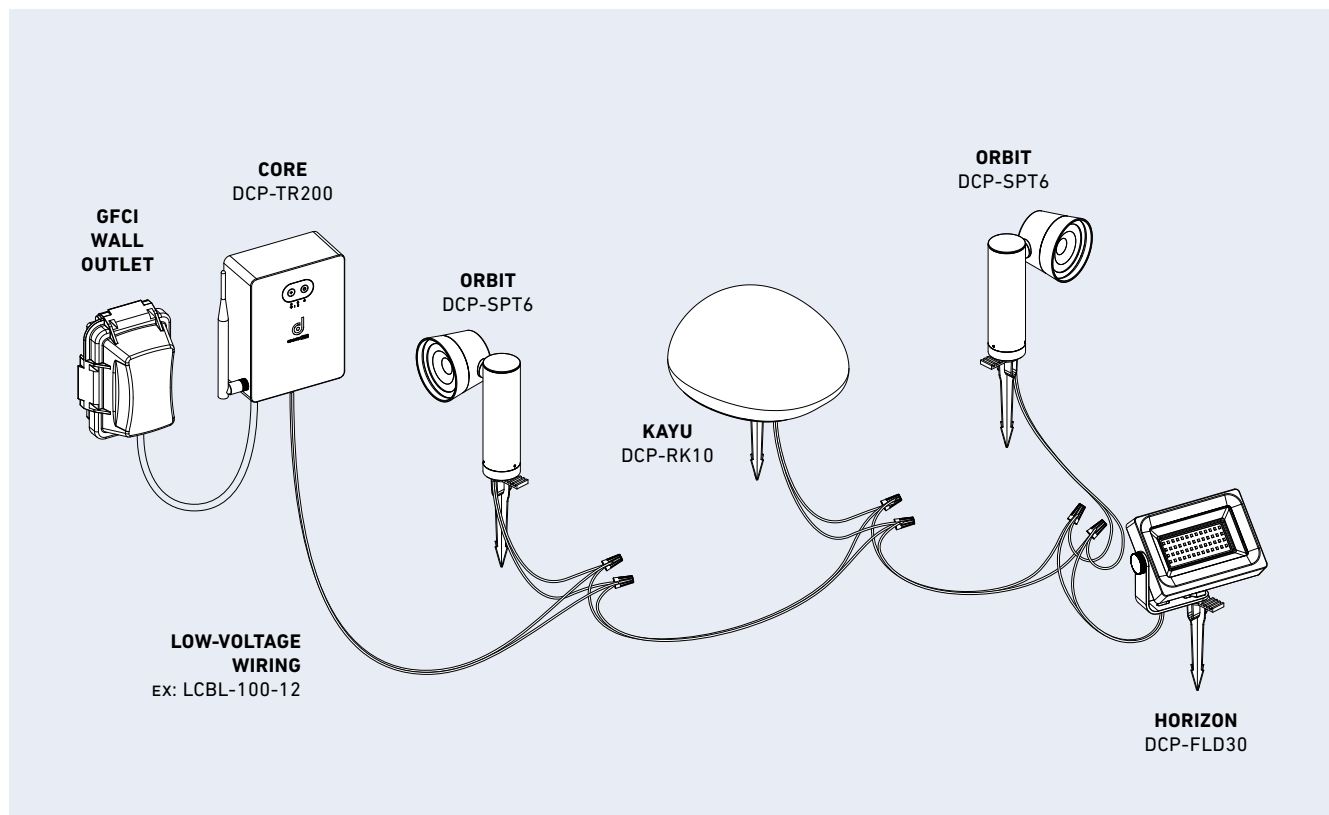

CORE

The heart of your connected landscape system. By adding the Core, you unleash the full potential of smart lighting.




DCP-TR



Model


DCP-TR60

60W low-voltage smart transformer

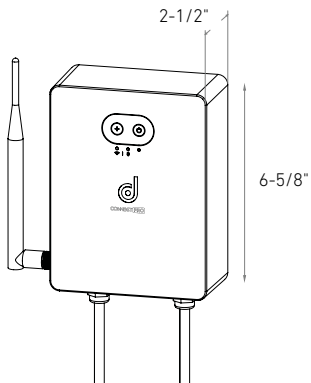


DCP-TR200

200W low-voltage smart transformer

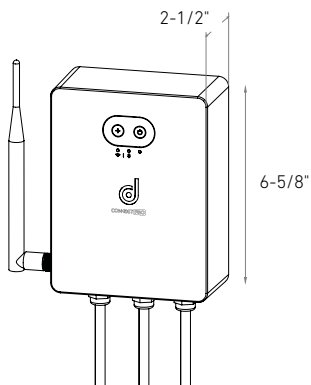

DCP-TR300

300W low-voltage smart transformer

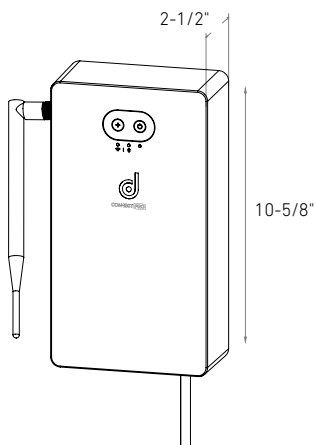

Specifications

Constant voltage mode power supply

Protection: short circuit / Over voltage

Input voltage: 120VAC 60Hz

Output voltage: 24V DC

Output Power: 60W, 200W, and 300W

Maximum recommended load: 80%

Operating temperature: -30°C to 45°C

Control with the Dals Connect app

Integrated Hub

Number of supported smart devices per hub: 128

Can be controlled locally (without internet)

Works with Dals Connect PRO devices

Secure connection

Can be used with a voice-controlled assistant

Supports Wi-Fi and BLE Mesh protocols

5-year warranty

Finish

● **BK** Black

Download the Dals Connect app

Create groups

Set schedules

Remote access

Compatible with Google

Assistant and Amazon Alexa



ORBIT



A swiveling, low profile light designed to brighten a number of exterior applications. Ideal for walkways and flower beds but fits comfortably in any environment. Add a second or third fixture together and create a multi-head device.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-SPT6	6"	10 W	540 lm	90	RGB + 2200 K - 4000 K	24 V DC



DCP-SPT6



Specifications

Full color spectrum
2200K - 4000K in pure whites
120° frosted lens included
40° beam angle
Up to three Orbit fixtures can be combined
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

DCP-ACC-MB

Mounting bracket

DCP-SPTTEXT14

14" extension tube

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring

GAÏA


The main quality of this modern classic is providing downward, wide-area lighting that is both calming and practical. The luminaire includes a head that not only creates unique highlights in flower beds and neatly groomed lawns but can easily light up walkways and winding paths.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-CPL24	24"	6 W	470 lm	80	RGB + 2200 K - 4000 K	24 V DC



DCP-CPL24

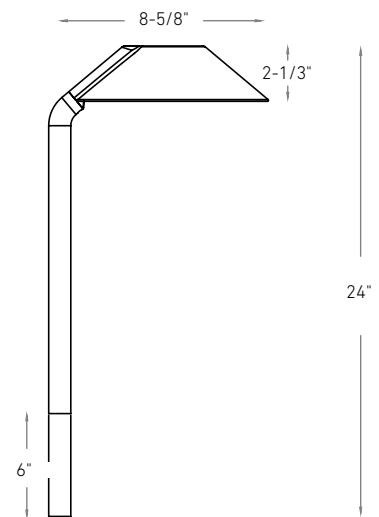

Specifications

Full color spectrum
2200K - 4000K in pure whites
Adjustable height: 18" or 24"
120° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring


AXIS

A slender form and a soft black finish give this luminaire a contemporary style that fits almost anywhere.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-STK20	20"	6 W	310 lm	80	RGB + 2200 K - 4000 K	24 V DC
DCP-STK50	50"	12 W	565 lm			

DCP-STK20 / DCP-STK50

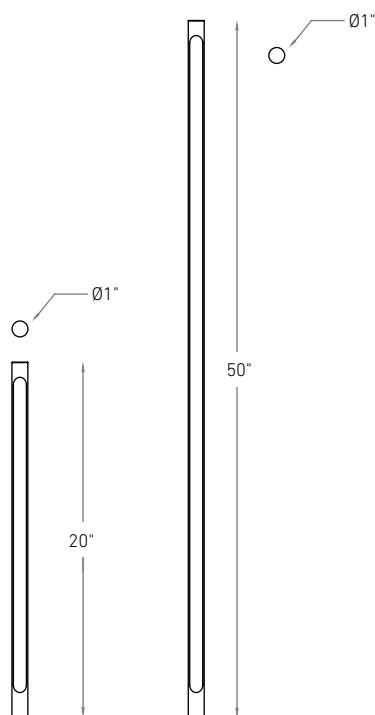

Specifications

Full color spectrum
2200K - 4000K in pure whites
120° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

DCP-ACC-MB

Mounting bracket

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring


ACUTE

With its 45-degree angled head, this modern classic provides calming and practical downward lighting, casting unique highlights in gardens and effortlessly illuminating pathways.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-45HP20	20"	7 W	600 lm	80	RGB + 2200 K - 4000 K	24 V DC

DCP-45HP20

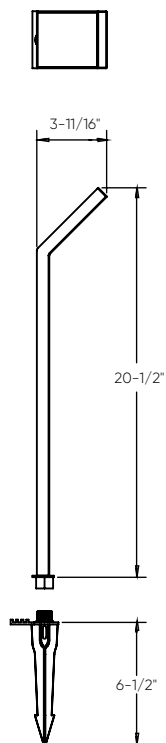

Specifications

Full color spectrum
2200K - 4000K in pure whites
45° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring


HORIZON

Made of high strength aluminum alloy with adjustable precision. Incredibly bright with a 120° degree beam angle, it can be wall mounted or staked in the ground.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-FLD30	7"	30 W	3000 lm	80	RGB + 2200 K - 4000 K	24 V DC

DCP-FLD30

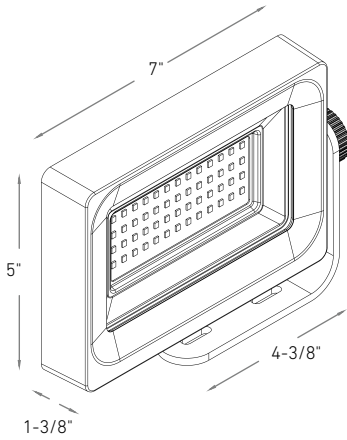

Specifications

Full color spectrum
2200K - 4000K in pure whites
Can be wall mounted
120° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

DCP-ACC-MB

Mounting bracket

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring

MASON

With its minimalistic form, simple casing and subtle appearance, Mason fits seamlessly into the architecture of any home.




DCP-BRK12



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-BRK12	12"	8 W	280 lm	80	RGB + 2200 K - 4000 K	24 V DC



DCP-BRK12

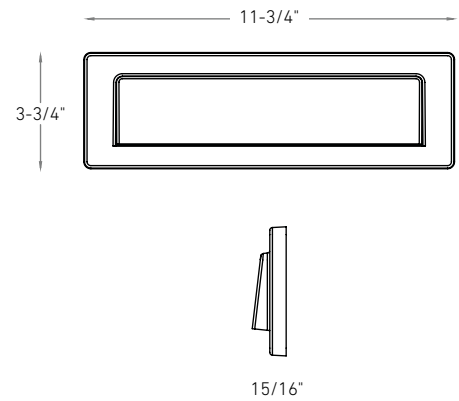

Specifications

Full color spectrum
2200K - 4000K in pure whites
Can be recessed or surface mounted
40° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
Installs into a standard electrical junction box
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring

FLEX

Transform any space with ease using our 5-meter smart neon tape light, seamlessly blending vibrant colors and dynamic lighting effects to create an ambiance that suits your mood and style.



DCP-NFTAP5M

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-NFTAP5M	5m (196")	24 W	1200 lm	80	RGB + 2200 K- 4000 K	24 V DC



Specifications

Full color spectrum
 2200K - 4000K in pure whites
 Seamless light emission with zero hotspots
 Flexible and bendable laterally only
 Can be cut every 2.5 inches
 (cannot be reconnected)
 36W plug-in transformer included
 Includes a wired controller with smart
 button for CCT selection, color customization
 and on/off control
 Dimmable through the Dals Connect app and
 the Clicc remote (DCP-RMCT)
 5-year warranty

Note

Add the DALS Connect Pro Core transformer
 or the Pro Hub for even greater flexibility:
 voice control, remote access, expanded mesh
 network.

Finish

○ **WH** White

Accessories

DCP-RMCT
 Smart remote
DCP-ACC-NFEC
 Silicone end cap for Neon Flex Tape
DCP-ACC-NFCH
 1 meter U-channel for Neon Flex Tape


Download the Dals Connect app

Create groups
 Set schedules
 Remote access*
 Compatible with Google
 Assistant and Amazon Alexa*



*Pro Core or the Pro Hub needed

DCP-NFTAP5M

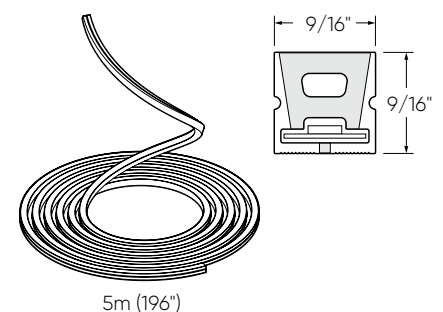

ORION

Garden parties, birthdays or a relaxing dinner. Create the perfect atmosphere with the numerous lighting effects provided by the Orion string light.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-STG48	48'	12 W	1200 lm	80	RGB + 2200 K - 4000 K	24 V DC



Specifications

Full color spectrum
 2200K - 4000K in pure whites
 24W plug-in driver included
 One 24W transformer can power two string lights daisy chained together
 15 bulbs per string
 On-wire remote control
 Preset animations
 Dimmable through the Dals Connect app
 5-year warranty

Note

Add the DALS Connect Pro Core transformer or the Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Accessories

DCP-STGACCLB

Bulb replacement

DCP-STGACPCB

PCB replacement


Download the Dals Connect app

Create groups
 Set schedules
 Remote access*
 Compatible with Google Assistant and Amazon Alexa*



* Pro Core or the Pro Hub needed

DCP-STG48

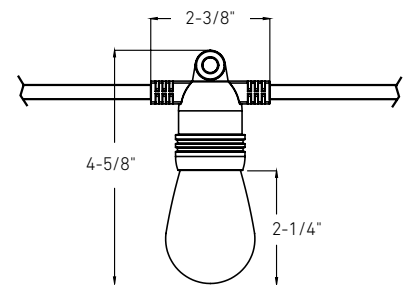


KAYU

Sprinkle your landscape with subtle touches of light. The Kayu series, a harmonious and organic fixture easily creates a welcoming atmosphere.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-RK10	10"	5 W	400 lm	80	RGB + 2200 K - 4000 K	24 V DC
DCP-RK18	18"	7 W	600 lm			

DCP-RK10



DCP-RK18

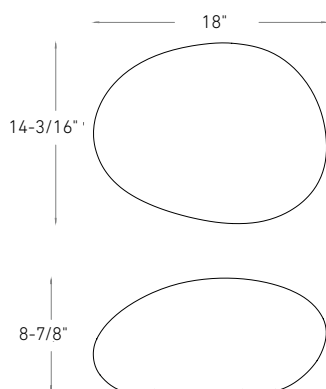

Specifications

Full color spectrum
2200K - 4000K in pure whites
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

○ WH White

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

DCP-ACC-MS12

12" metal ground stake

DCP-ACC-MS06

6" metal ground stake

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14















50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12















100 or 200 feet of 12-gauge low-voltage wiring





LANDSCAPE ACCESSORIES

Model		Finish	Specification
LAN-ACC-MS  WET		Black	<ul style="list-style-type: none"> • 6-3/4 in. metal replacement stake for spotlights
LAN-ACC-PS  WET		Black	<ul style="list-style-type: none"> • 7-1/4 in. plastic replacement stake for path lights and bollards
LCBL-50-16 LCBL-100-16 LCBL-50-14 LCBL-100-14 LCBL-100-12 LCBL-200-12  WET		Black	<ul style="list-style-type: none"> • 16, 14, and 12 gauge low-voltage wire in 50, 100, and 200 ft. lengths.
LSP-EXT04  WET		Black	<ul style="list-style-type: none"> • 4 in. extension arm
LSP-WM  WET		Black	<ul style="list-style-type: none"> • Spotlight wall mount adapter
LSP3-ACCLN LSP4-ACCLN  WET		Clear	<ul style="list-style-type: none"> • 20° and 40° interchangeable lenses for LSP3-CC and LSP3-CC spot lights
LSQP-ACC-PS  WET		Black	<ul style="list-style-type: none"> • 7-1/4 in. plastic replacement stake for LSQP-CC path light

SMART LANDSCAPE ACCESSORIES

Model		Finish	Specification
DCP-ACC-MB  WET		Black	<ul style="list-style-type: none"> • Mounting bracket for smart landscape lights
DCP-ACC-MS06 DCP-ACC-MS12  WET		Black	<ul style="list-style-type: none"> • 6 and 12 in. metal replacement ground stakes for smart landscape lights
LCBL-50-16 LCBL-100-16 LCBL-50-14 LCBL-100-14 LCBL-100-12 LCBL-200-12  WET		Black	<ul style="list-style-type: none"> • 16, 14, and 12 gauge low-voltage wire in 50, 100, and 200 ft. lengths.
DCP-PTR36  WET		Black	<ul style="list-style-type: none"> • 36W plug-in driver for smart landscape lights
DCP-SPTACCLENS  WET		Frosted white	<ul style="list-style-type: none"> • 120° frosted lens for DCP-SPT6 spot light
DCP-SPTTEXT14  WET		Black	<ul style="list-style-type: none"> • 14 in. extension tube for DCP-SPT6 spot light
DCP-STGACCBLEB DCP-STGACCPCB  WET		White	<ul style="list-style-type: none"> • Replacement bulb for DCP-STG48 string light • Replacement PCB for DCP-STG48 string light

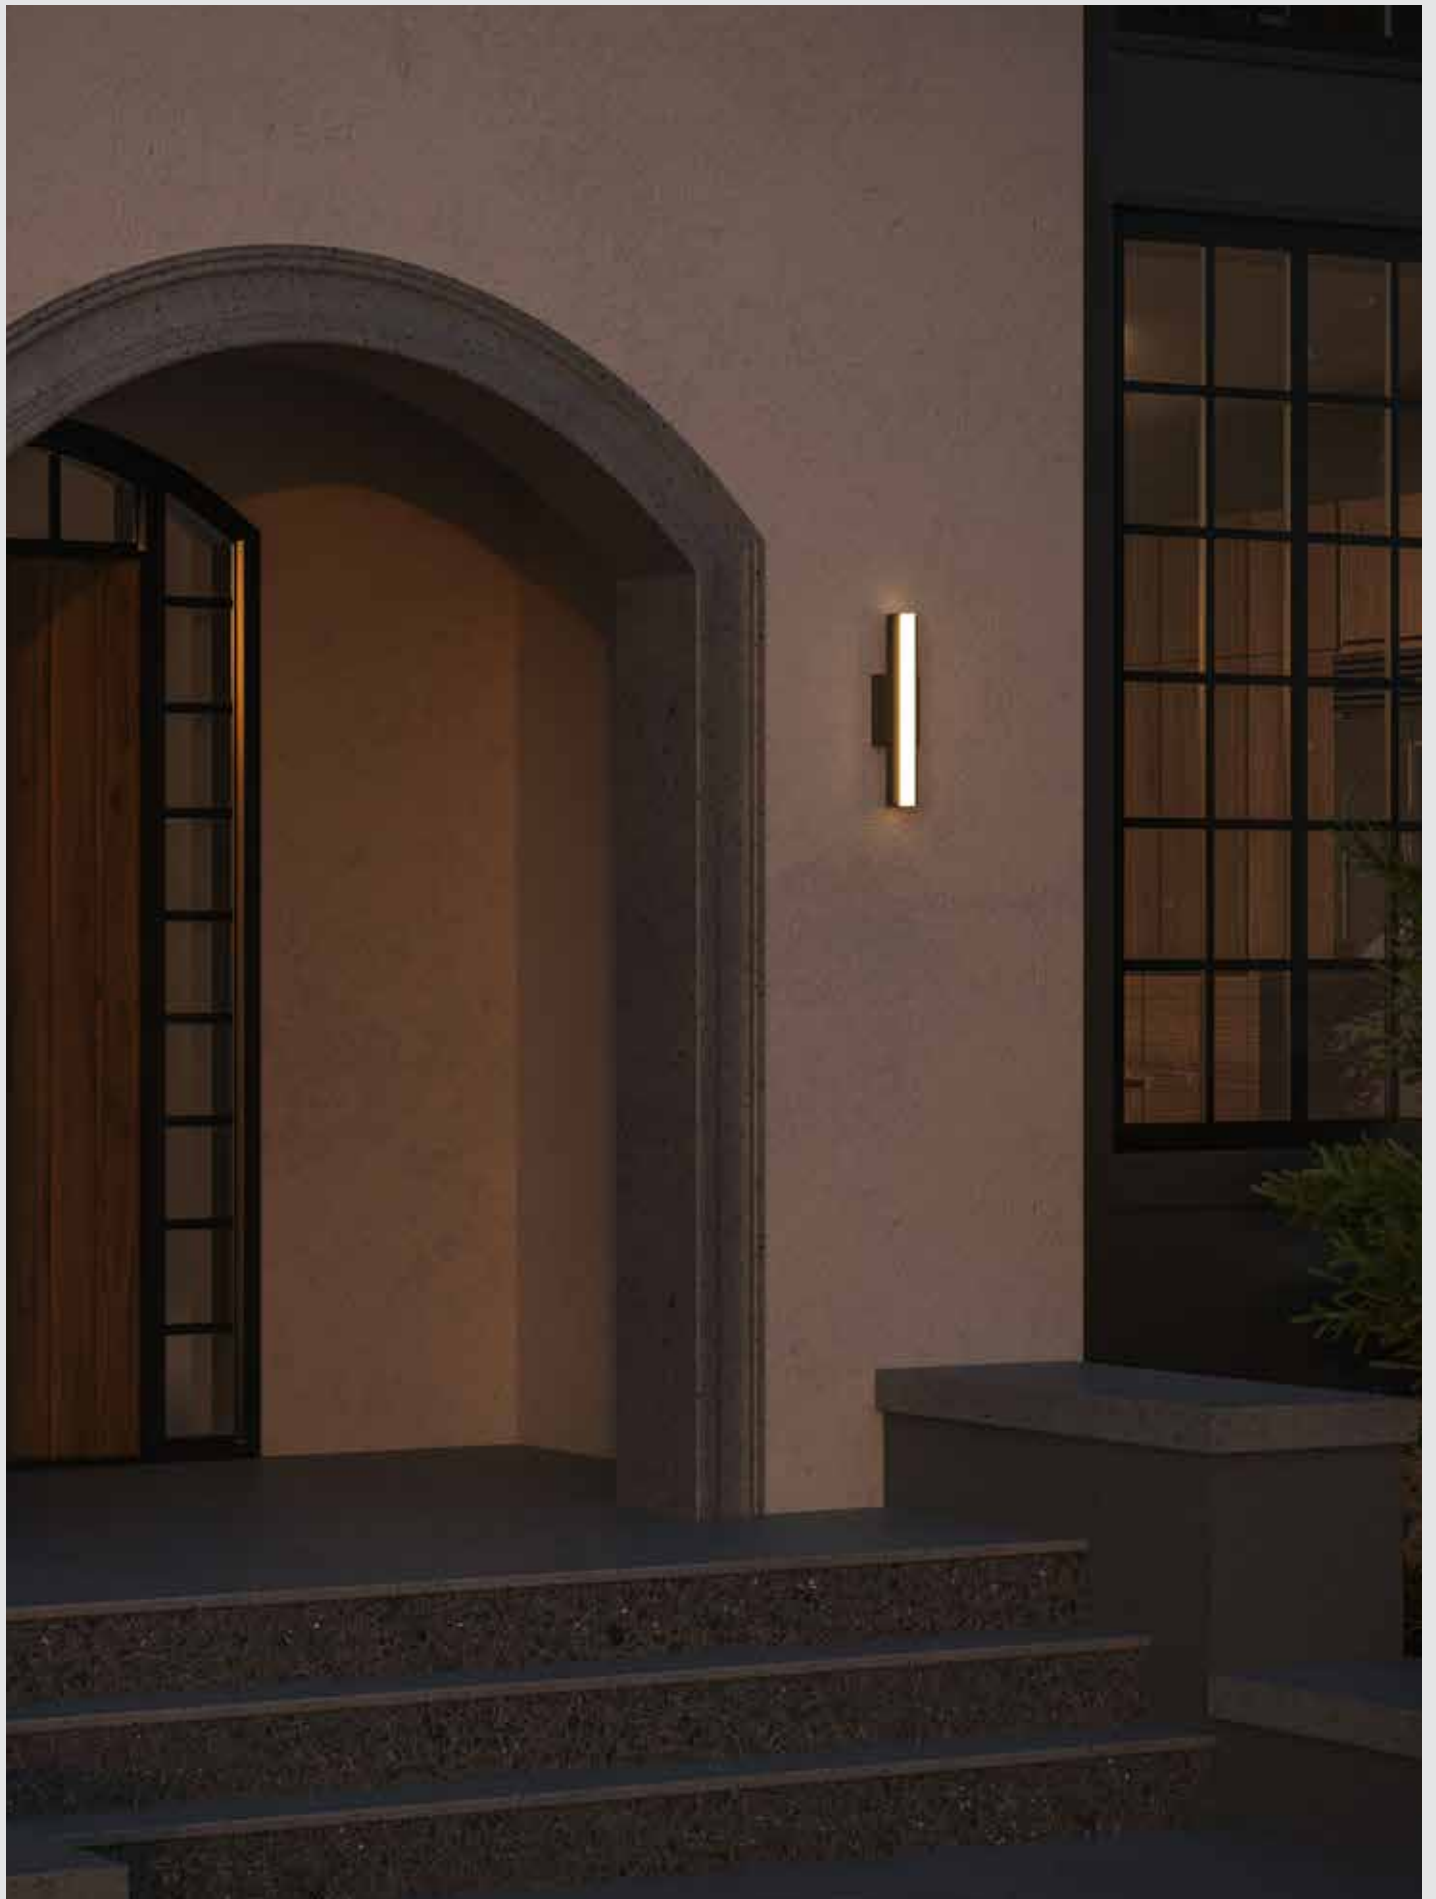

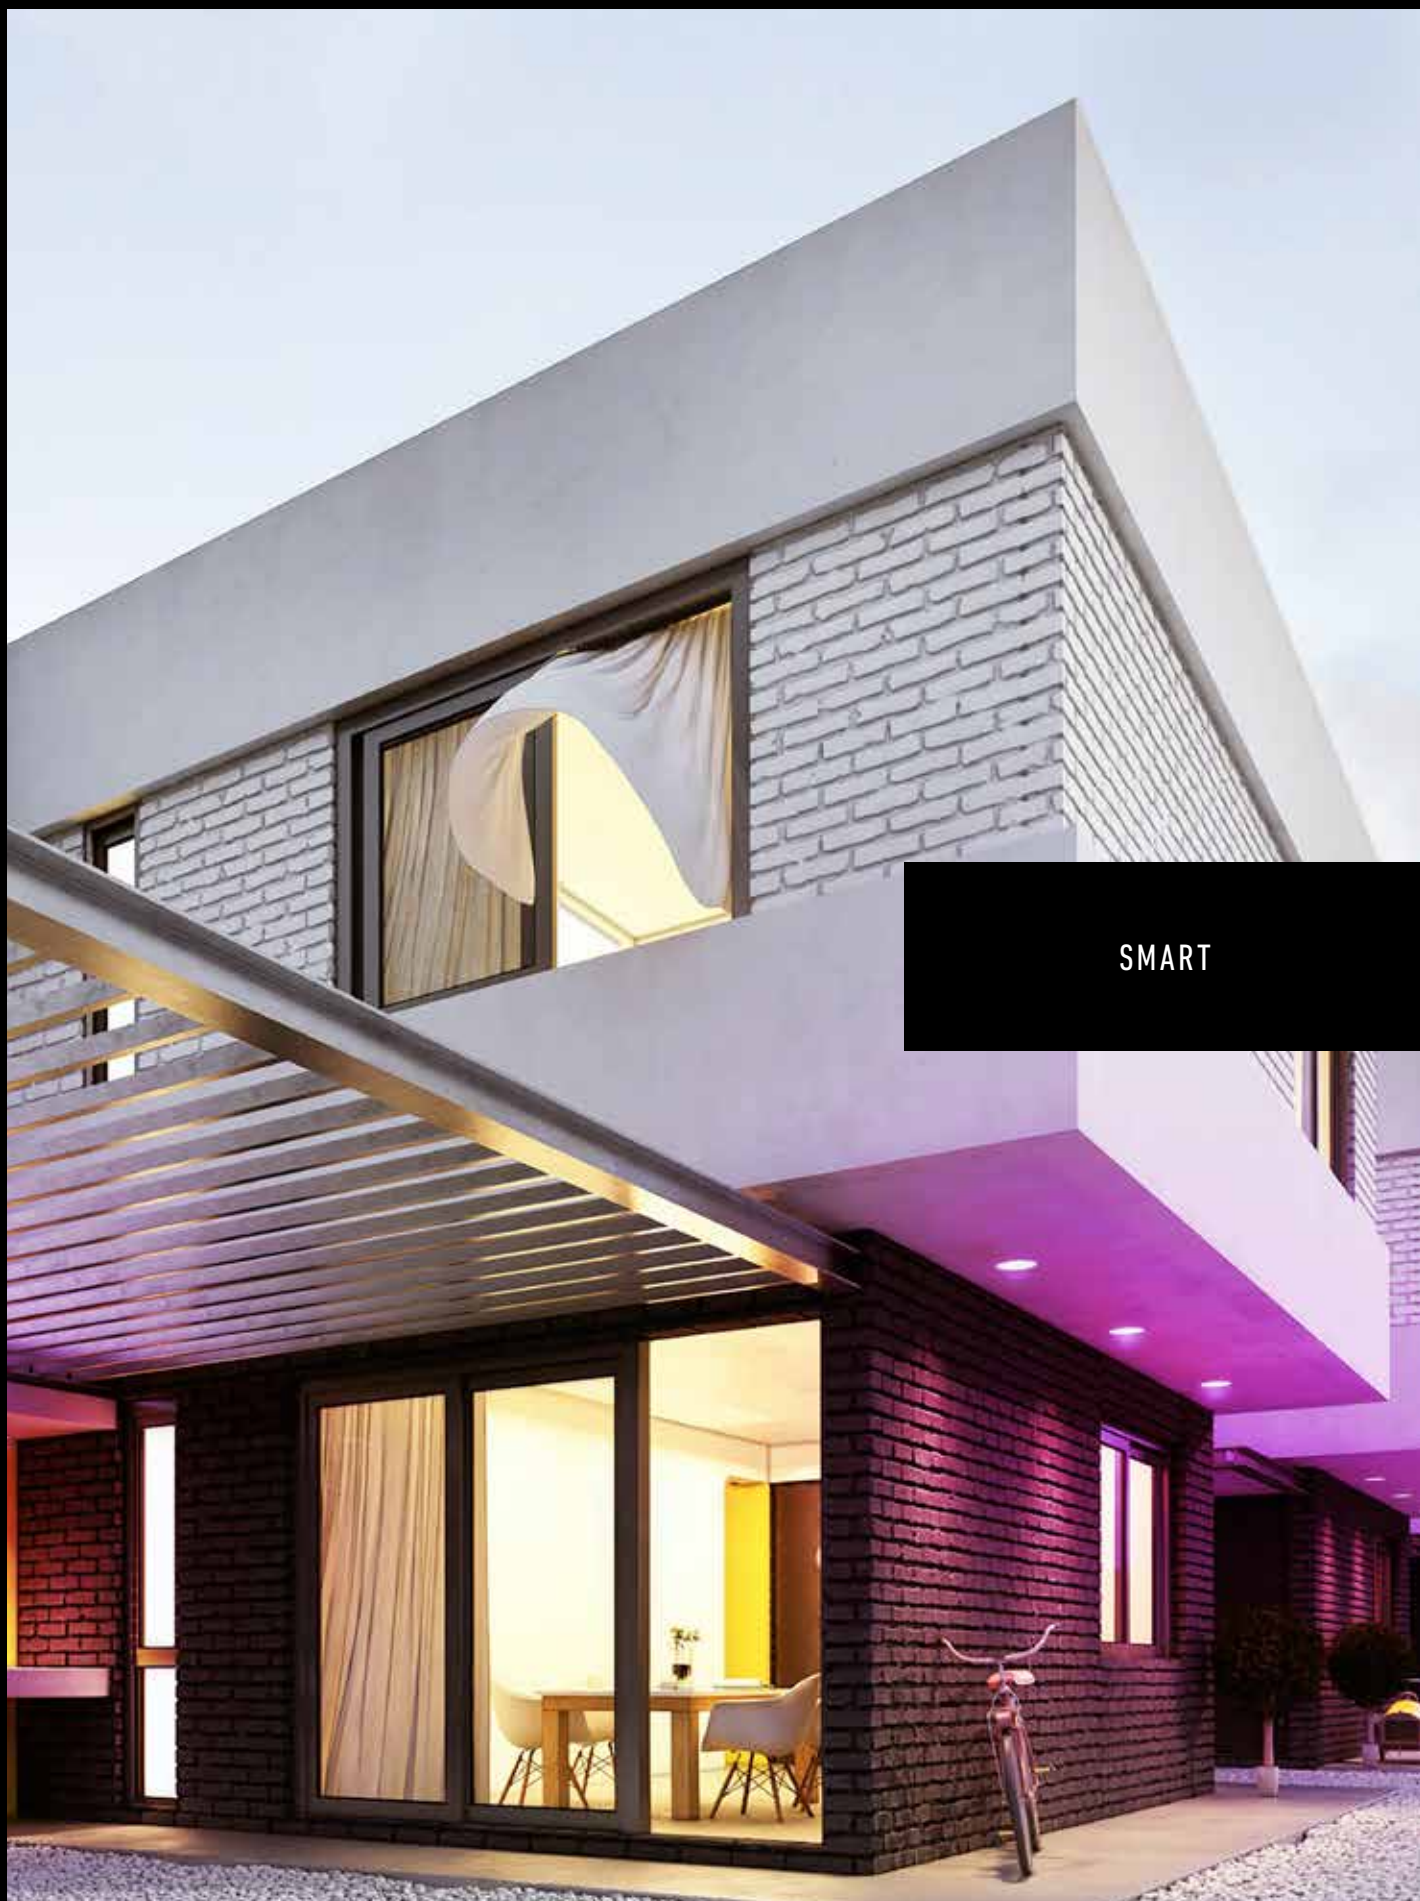

SMART



301
CONNECTION
GUIDE



304
PRO HUB
DCP-HUB




306
PIVOT PRO
DCP-FGM4



308
REVOLVE PRO
DCP-GBR35



310
ETCH PRO
DCP-DDP4
DCP-DDP6



312
EXCEL PRO
DCP-PNL4
DCP-PNL6



314
BOULEVARD PRO
DCP-LNR24
DCP-LNR48



316
BOULEVARD
PENDANT PRO
DCP-LNPD48



318
FRAME
DCP-CGWS



320
ARCHITECT
DCP-LWS19



322
GLOW
DCP-TAPXXFT



324
AXIS PRO
SM-STTL20
SM-STFL50



326
A21 PRO
DCP-BLBA21



328
BR30 PRO
DCP-BLBBR30



330
CLICC
DCP-RMCT



332
SMART DIMMER SWITCH
SM-DIMSW



One app — one smart ecosystem with technology options

DALS launched its first smart home products in 2017 and has sold over 350,000 devices as of December 2023, showcasing our developed application expertise.

In 2019, the introduction of our DALs Connect platform quickly established its leadership with its Wi-Fi direct product ecosystem.

In 2022, DALs expanded its offerings with the launch of the DALs Connect PRO product assortment.

This line utilizes Bluetooth mesh technology, enabling a higher number of devices on a network and introducing several other advanced features.

Both DALs Connect and DALs Connect PRO products seamlessly work together and can easily coexist on the same application.

There are many benefits to smart lighting



Experience

White color temperature and a wide array of fun colors are easily changeable, allowing you a multitude of lighting options for comfort.



Save

Save on energy and increase your home's security by using schedules or remotely turning on/off the lights when no one is home.



Control

Easily control your lighting with smart switches, your phone, or a voice assistant for even more convenience.



Create

With the Dals Connect app, you can program your own lighting scenes for specific conditions and tasks, such as watching movies, daytime or nighttime reading, parties, and much more. Within a scene, you can change the brightness, color temperature, and even use different hues.

What are the main differences between DALS Connect and DALS Connect PRO?



dals CONNECT

Quick start – direct features

DALS Connect products use Wi-Fi wireless technology which is used widely to connect computers, tablets, smartphones, smart devices, and others to the internet. Wi-Fi is shared through a router to all Wi-Fi enabled devices. This technology allows for a lot of range and a lot of devices, although there are some limitations as well. Wi-Fi has a relatively high absorption rate and works best for line-of-sight uses. A residential wireless access point usually has a range of about 30 feet and a maximum of 20 devices, depending on the type of wireless access point.



dals CONNECT PRO

Higher number of devices – independent network

DALS Connect PRO uses Bluetooth-mesh technology. It works on the principle that each Bluetooth device on the mesh network can relay commands to another device, through the connection from the previous device. Bluetooth-mesh networking is a standard based on Bluetooth Low Energy that allows for many-to-many communication over Bluetooth radio. You can use your smart phone or tablet to control large groups of products even without an internet connection.

Dals Connect Pro hub

You can also add the Dals Connect Pro hub, to connect up to 128 DALS Connect PRO products to the cloud as a single internet connection (as opposed to DALS Connect products where each product has its individual connection). You can also use multiple hubs for projects with more than 200 devices, with each hub acting as an internet connection as well. Cloud connection allows you to use your products with voice command platforms (such as Google Home and Amazon Alexa) as well as allowing for remote control.



**GOOD
TO KNOW!**



Not all Wi-Fi routers are created equal. A 30\$ router will not perform the same or support the same number of devices as a 350\$ router. The number of antennas will greatly increase your Wi-Fi range.



Most smart devices only operate on the 2.4 GHz spectrum, whereas most routers nowadays share the same band for 5 GHz and 2.4 GHz. If you experience issues with disconnecting devices or trouble adding new devices, try separating your 5 GHz and 2.4 GHz band on your router. Your internet service provider can help you set this up.

Which one is best for me?

Thanks to the Dals Connect Application, you don't have to use multiple apps to control all of your smart devices, even if you decide to mix and match communication technologies.

The Dals Connect App can support Bluetooth-mesh devices mixed with Wi-Fi devices, and you can add cloud connectivity to your Bluetooth-mesh devices using the Dals Connect Pro hub. All of these will work together, but which one is right for you? Let's find out.

	DALS Connect	DALS Connect PRO	DALS Connect PRO + Hub
Uses the DALS Connect App	•	•	•
Can be controlled from multiple devices at once	•		•
Operating range within the controller's line of sight (Wi-Fi router or another Bluetooth-mesh device)	30 FT	50 FT	50 FT
Number of supported smart devices	20	100*	200
Can be controlled locally (without internet)		•	•
Requires multiple access points to extend the range	•		
Secure connection	•	•	•
Can be used with voice-controlled assistant	•		•

**The actual maximum number of Bluetooth devices supported in a mesh network is much higher (32 767) but achieving these numbers would require professional network installations and mesh network segmentation.*



You can use a free network scanner tool to determine the limited range of your router. Wireless strength is represented as dBm (decibel-milliwatts) and a good Wi-Fi signal will usually range between -30 and -65 dBm. Anything lower than -65 dBm will most likely experience issues.



The technology you choose doesn't have to be all the same. You can easily combine Bluetooth Mesh devices with Wi-Fi devices thanks to the Dals Connect App. It all depends on the application. If you wish to have smart recessed devices for your exterior soffits, you would opt for Dals Connect Pro products to gain maximum range and inter-connectivity, and could combine them with Wi-Fi products for your living room. The choice is up to you!

PRO HUB

By connecting to the hub you enable communication with the cloud and the Dals Connect app, allowing users to easily view and control up to 200 smart devices for each hub that use the Bluetooth protocol. Supports Wi-Fi, Ethernet and BLE Mesh: You can control it remotely through Wi-Fi or Ethernet and locally through BLE, ensuring gateway availability even if there is no network.



DCP-HUB



Model	Size	Wi-Fi	Ethernet	Bluetooth	Number of supported devices	Alexa & Google Assistant compatible	Voltage
DCP-HUB	4"	√	√	√	200*	√	120 V

*Per Hub



Specifications

Indoor use only
 Control with the Dals Connect app
 Number of supported smart devices per hub: 200
 Can be controlled locally (without internet)
 Can be powered through any USB port with power
 Works with Dals Connect PRO devices
 Secure connection
 Can be used with a voice-controlled assistant
 Supports Wi-Fi and BLE Mesh protocols
 Supports a hardwired internet connection using an ethernet cable
 5-year warranty

Finish

☐ **WH** White


Note

For remote access a secured 2.4 GHz wireless network or an ethernet cable (included) is required.

Download the Dals Connect app



DCP-HUB



NEW

PIVOT PRO

The Pivot Pro gimbal recessed light offers adjustable, app-controlled illumination, enhancing both convenience and atmosphere in any space.

DCP-FGM4



90°
SWIVEL/DIRECTIONAL



IC
RATED

T24
JA8
CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-FGM4	4"	9 W	532 lm	90	RGB + 2700 K - 6500 K	120 V

DCP-FGM4

Ø4-1/4"



Ø4-13/16"



Specifications

Includes a junction box with integrated driver
Full color spectrum
2700K - 6500K in pure whites
40° beam angle
90° tilting, 360° rotation
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

☐ WH White

Accessories

DCP-RMCT

Smart remote

RFP-UNI

Universal rough-in plate

RFP-46

Rough-in plate

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Hub needed

REVOLVE PRO

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-GBR35	3.5"	12 W	650 lm	90	RGB + 2700 K - 6500 K	120 V



Specifications

Includes a junction box with integrated driver

Full color spectrum

2700K - 6500K in pure whites

40° beam angle

30° tilting, 360° rotation

Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)

5-year warranty

Note

Add the DALI Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Finish

● **BK** Black

○ **WH** White

Accessories

DCP-RMCT

Smart remote

RFP-UNI

Universal rough-in plate

RFP-46

Rough-in plate

Download the Dals Connect app

Create groups

Set schedules

Remote access*

Compatible with Google

Assistant and Amazon Alexa*



* Hub needed

DCP-GBR35



ETCH PRO

With reduced glare and a sleek and minimal construction, the Dals Connect Pro regressed panel lights will be a great addition to any project. Connect 100+ devices through Bluetooth, create groups, set schedules and select from a wide range of colors, all possible with the DALS Connect App™.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-DDP4WH	4"	15 W	1000 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-DDP6WH	6"	20 W	1500 lm			



Specifications

Includes a junction box with integrated driver

Full color spectrum

2700K - 6500K in pure whites

125° beam angle

Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)

5-year warranty

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Finish

○ **WH** White

Accessories

DCP-RMCT

Smart remote


RFP-UNI

Universal rough-in plate


RFP-46

Rough-in plate

DCP-DDP4

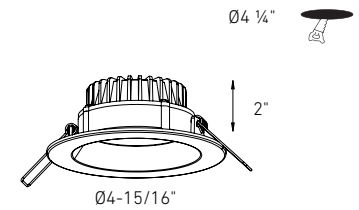

DCP-DDP6

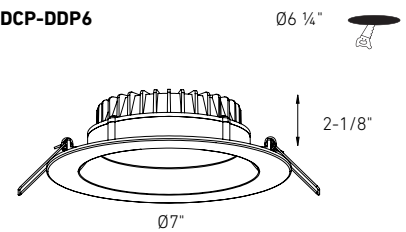

Download the Dals Connect app

Create groups

Set schedules

Remote access*

Compatible with Google

Assistant and Amazon Alexa*





* Hub needed

EXCEL PRO

The Dals Connect Pro panel lights will be a great addition to any project. Connect 100+ devices through Bluetooth, create groups, set schedules and select from a wide range of colors, all possible with the DALS Connect App™.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-PNL4WH	4"	14 W	750 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-PNL6WH	6"	20 W	1200 lm			

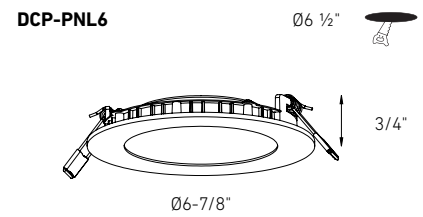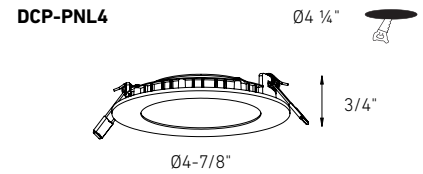

Specifications

Includes a junction box with integrated driver

Full color spectrum

2700K - 6500K in pure whites

150° beam angle

Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)

5-year warranty

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Finish

☐ **WH** White

Download the Dals Connect app

Create groups

Set schedules

Remote access*

Compatible with Google Assistant and Amazon Alexa*



* Hub needed

Accessories

DCP-RMCT

Smart remote

DCP-PNL4-TRIM-BK (DCP-PNL4WH)

4" recessed panel trim in black

DCP-PNL6-TRIM-BK (DCP-PNL6WH)

6" recessed panel trim in black

RFP-UNI


Universal rough-in plate

RFP-46

Rough-in plate

BOULEVARD PRO


The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

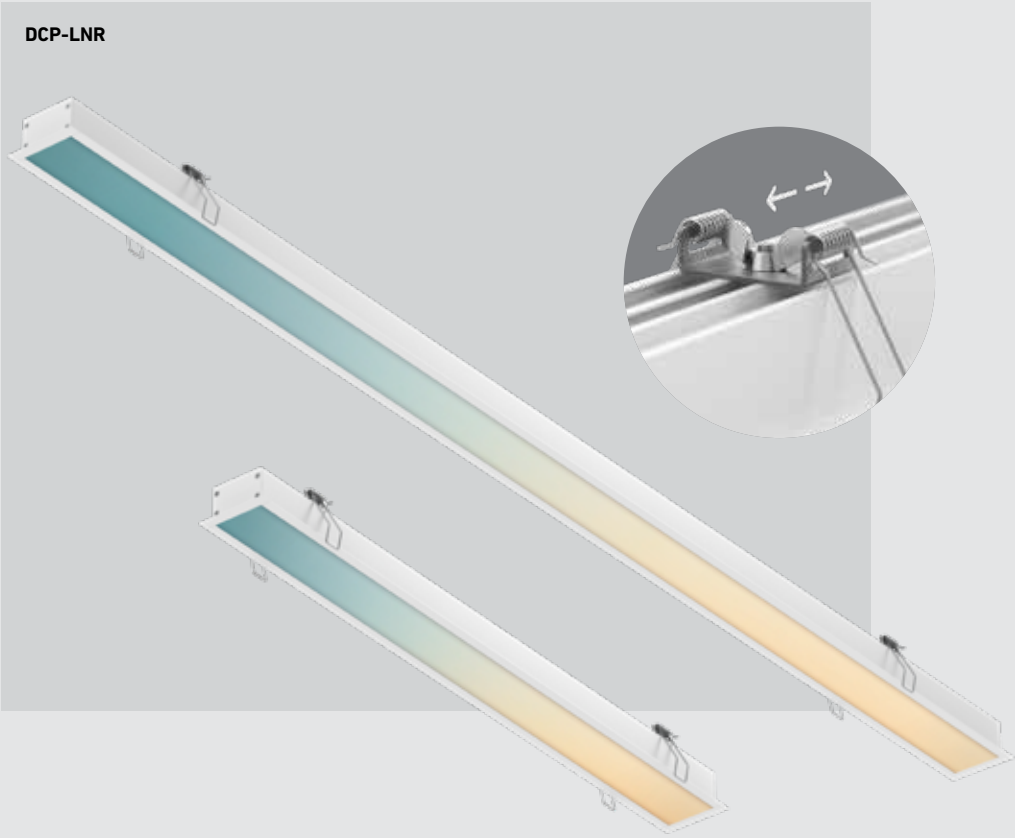


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LNR24	24"	20 W	1785 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-LNR48	48"	40 W	3380 lm			

DCP-LNR24

23-1/4" x 2-1/8"

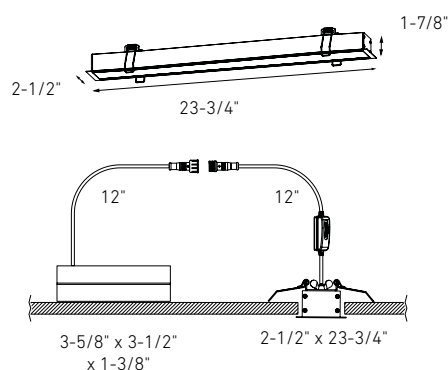**DCP-LNR48**

47-1/4" x 2-1/8"

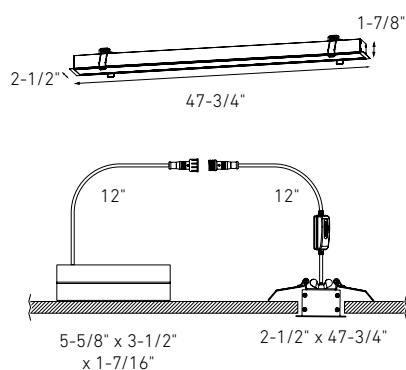**Finish**
☐ **WH** White
Accessories**LNACC-L16FT**

16-foot lens for Boulevard series pendants and recessed linears

DCP-RMCT

Smart remote

RFP-LNR24

Rough-in plate for LNR24

RFP-LNR48

Rough-in plate for LNR48

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups

Set schedules

Remote access*

Compatible with Google

Assistant and Amazon Alexa*



* Hub needed

**Specifications**

Includes a junction box with integrated driver

Full color spectrum

2700K - 6500K in pure whites


108° beam angle

Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)

5-year warranty


BOULEVARD PENDANT PRO

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.

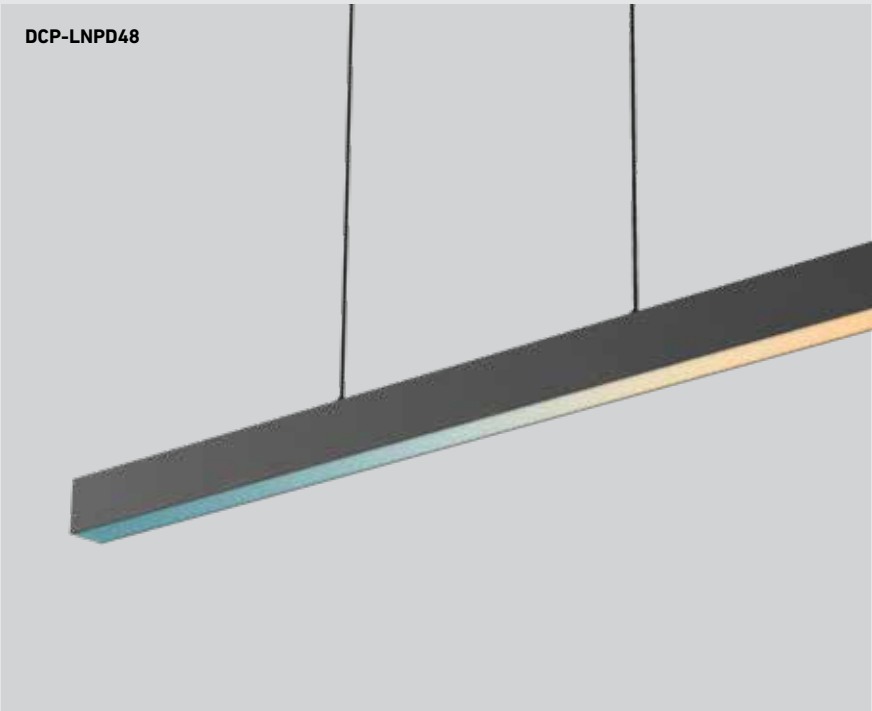

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LNPD48	48"	40 W	2620 lm	90	RGB + 2700 K - 6500 K	120 V

DCP-LNPD48

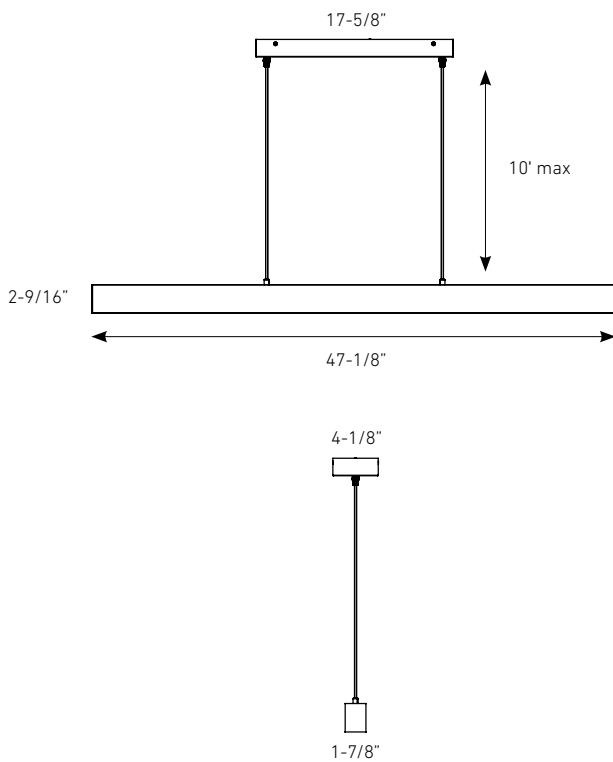

Specifications

Includes a junction box with integrated driver
Full color spectrum
2700K - 6500K in pure whites
108° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

● **BK** Black

Accessories

LNACC-L16FT

16-foot lens for Boulevard series pendants and recessed linears

DCP-RMCT

Smart remote

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Hub needed

FRAME


Frame elegantly combines functionality with style, offering a dynamic lighting experience, all conveniently controlled by a sleek smart button for personalized illumination.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-CGWS	12-7/8"	20 W	1000 lm	80	RGB + 2200 K - 4000 K	120 V



DCP-CGWS

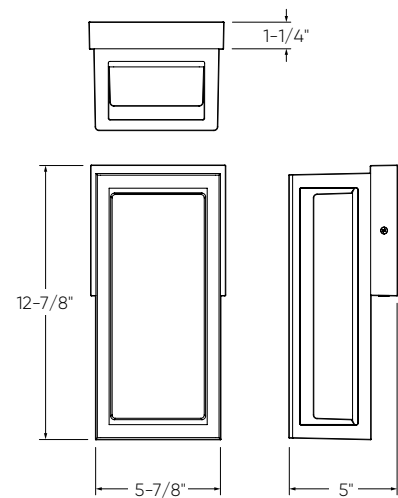

Specifications

Full color spectrum
2200K - 4000K in pure whites
Choose from 7 preset colors and 5 white tones directly using the button, or access additional options through the app
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
Wall mount on 4" octagonal junction box
120° beam angle
5-year warranty

Finish

● **BK** Black

Accessories

DCP-RMCT
Smart remote

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app


Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Hub needed


ARCHITECT WALL

Looking to add to your smart family products? Here is our new smart linear wall sconce. Not only decorative but also practical, this fixture can be controlled with the DALI Connect™ app and is compatible with Google Home and Amazon Alexa. So many options at your fingertips - the possibilities are endless.

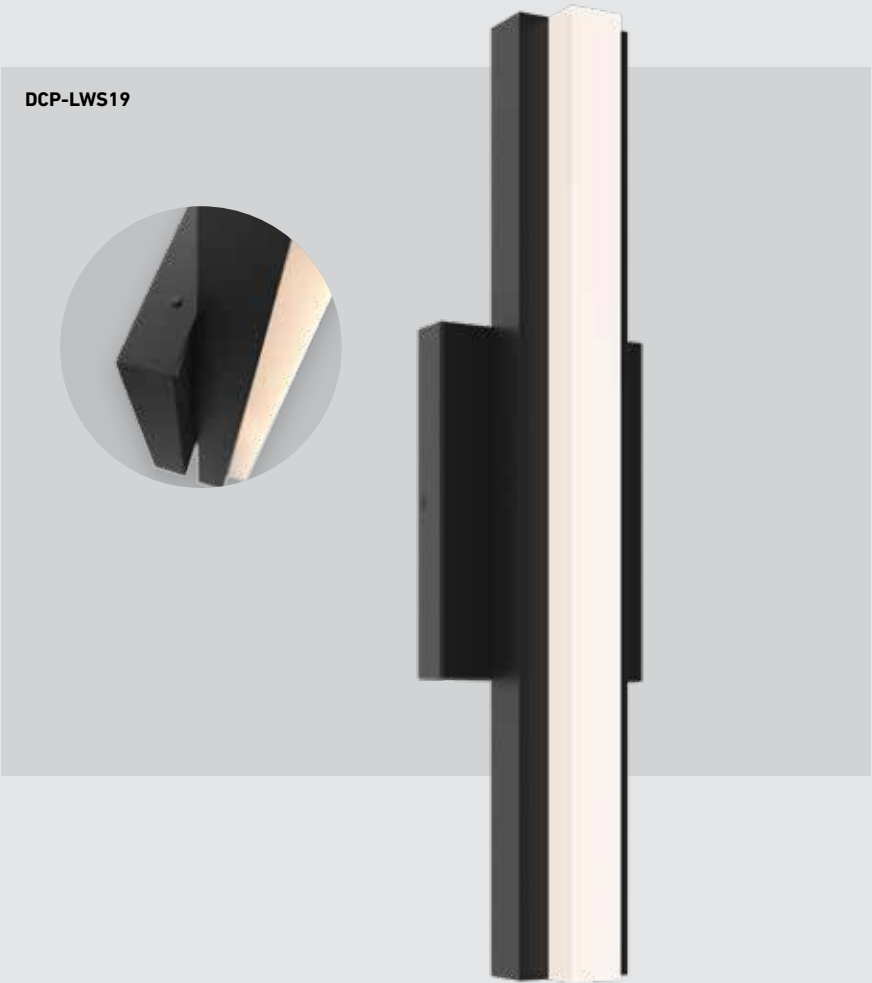

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LWS19	19"	15 W	1130 lm	80	RGB + 2200 K - 6500 K	120 V

DCP-LWS19

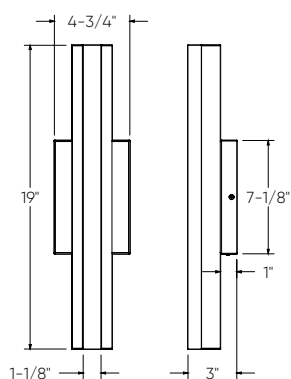

Specifications

Made of extruded aluminum
Full color spectrum
2700K - 6500K in pure whites
Choose from 7 preset colors and 5 white tones directly using the button, or access additional options through the app
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
Wall mount on 4" octagonal junction box
5-year warranty

Finish

● **BK** Black

Accessories

DCP-RMCT
Smart remote

Download the Dals Connect app


Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Hub needed

GLOW


The 10, 20, and 50-foot smart tape features a full RGB color range and tunable white light, enabling users to adjust from warm to cool tones—perfect for adding dynamic and personalized lighting to any space.

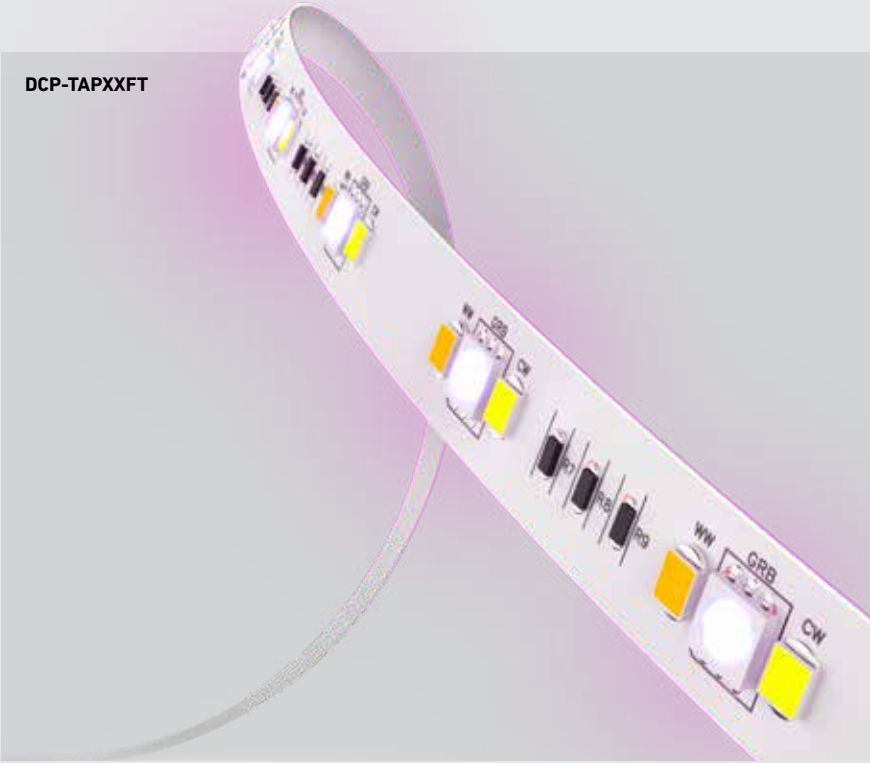


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-TAP10FT	10'	9 W	700 lm	80	RGB + 2700 K - 6500 K	24 VDC
DCP-TAP20FT	20'	16 W	1200 lm			
DCP-TAP50FT	50'	19 W /per 25'	1400 lm /per 25'			



DCP-TAP10FT / DCP-TAP20FT

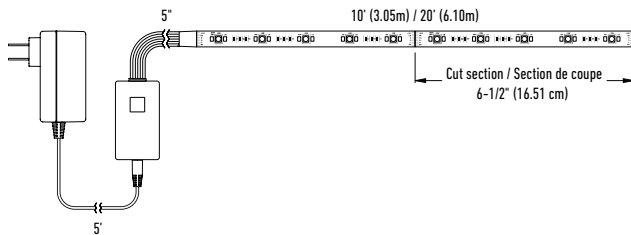

DCP-TAP50FT

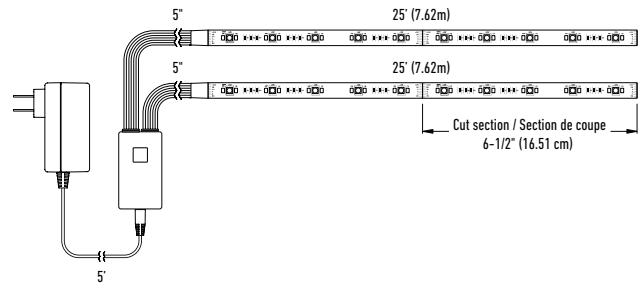

Specifications

Full color spectrum
2700K - 6500K in pure whites
Includes a wired controller with smart button for CCT selection, color customization and on/off control
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

☐ **WH** White

Accessories

DCP-RMCT
Smart remote

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app



Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Hub needed


AXIS PRO

The digital Axis 20" table lamp and 50" floor lamp let you adjust individual segments for precise illumination, offering a fully personalized lighting experience. Additionally, select from a range of pre-designed smooth animations to create the perfect mood.

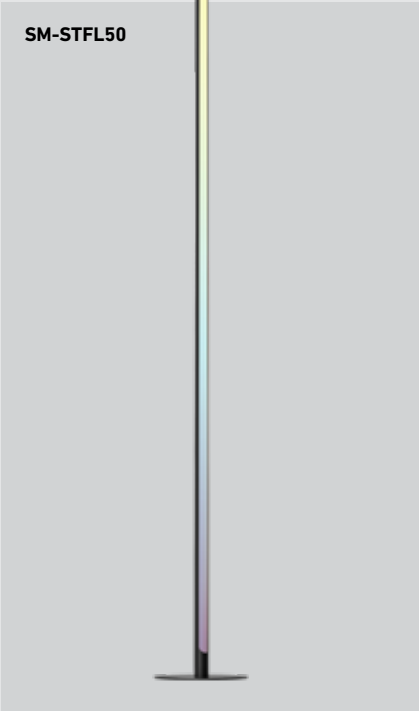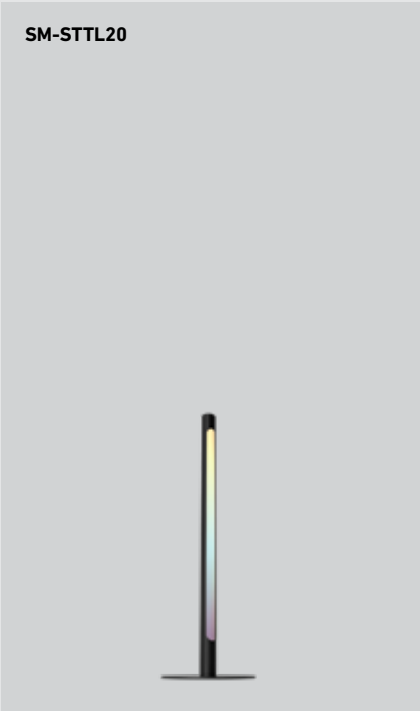


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-STTL20	20"	7 W	360 lm	80+	RGB + 2200 K - 6500 K	120 V
SM-STFL50	50"	14 W	720 lm			

SM-STTL20



SM-STFL50



Specifications

Full color spectrum
2700K - 6500K in pure whites
Create gradients
Preset animations
Aluminum construction
On-cord on/off physical switch
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

● **BK** Black

Download the Dals Connect app

Wi-Fi - no hub needed
Create groups
Set schedules
Remote access
Compatible with Google Assistant and Amazon Alexa




A21 PRO

Enter the world of Smart lighting with our array of dimmable LED Bluetooth controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-BLBA21	A21	12 W	1100 lm	90	RGB + 2700 K - 6500 K	120 V

DCP-BLBA21

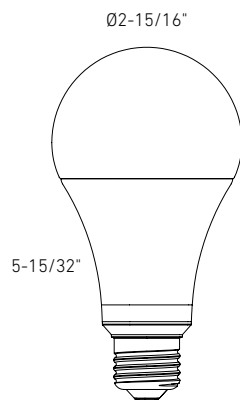

Specifications

Full color spectrum
2700K - 6500K in pure whites
Suitable for enclosed fixtures
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

☐ **WH** White

Accessories

DCP-RMCT
Smart remote

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Hub needed

BR30 PRO

Enter the world of Smart lighting with our array of dimmable LED Bluetooth controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K.


DCP-BLBBR30



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-BLBBR30	BR30	12 W	1200 lm	90	RGB + 2700 K - 6500 K	120 V



DCP-BLBBR30

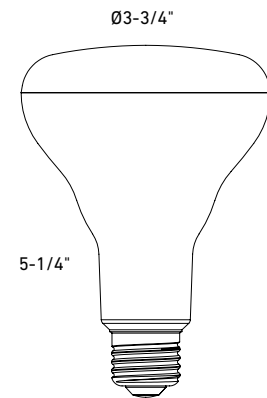

Specifications

Full color spectrum
2700K - 6500K in pure whites
Minimal heat emission
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Finish

☐ **WH** White

Accessories

DCP-RMCT
Smart remote

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



* Hub needed

CLICC

Upgrade your home automation with the Click smart remote and enjoy the perfect combination of local control and app integration for a seamlessly connected smart home experience. Effortlessly integrate your Dals Connect Pro products for centralized control over multiple devices. The remote is easily detachable from its wall plate, allowing you to take it anywhere in your home. Adjust color temperatures, dim the lights, or select vibrant hues—all with ease from this versatile remote.






DCP-RMCT



Model	Size	Programmable	Wall adapter	Number of supported devices	Battery
DCP-RMCT	2 5/8"	√	√	100	CR2032

DCP-RMCT

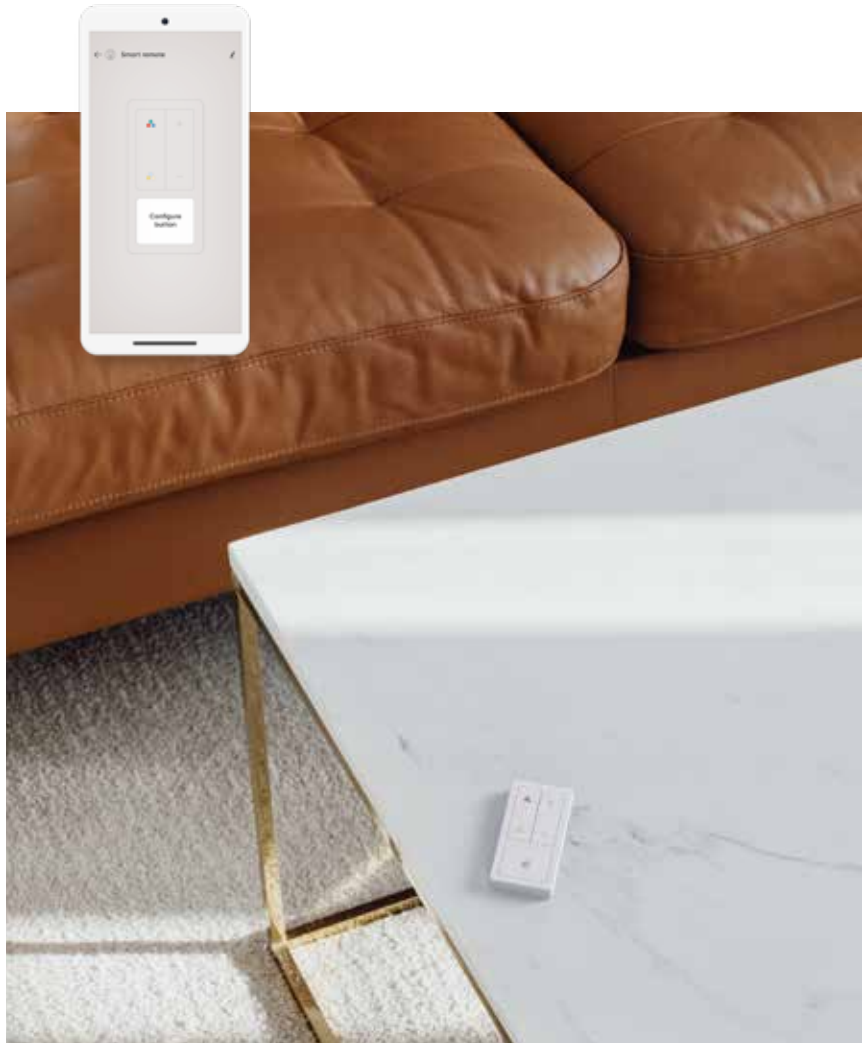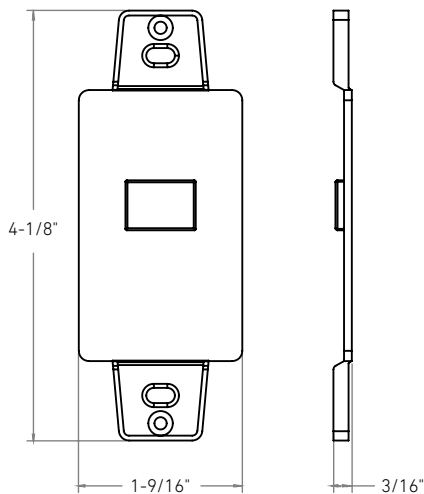

Specifications

Indoor use only
Controls any Dals Connect Pro device
Tune whites, change colors, dim or turn on/off the lights
Control your lights locally, without an internet connection, directly from the remote
Fits any decorator wall plate (not included)
Includes remote, CR2032 battery and magnetic wall plate adapter
5-year warranty

Finish

☐ **WH** White

Download the Dals Connect app



SMART DIMMER SWITCH

In need of a dimmer but not sure which one to get? Look no further. With the DALS Connect™ app, you will be able to create groups, set timers and much more. This is a great way to get to know smart home technologies and perhaps convince you to come and join us on the smart side with our ever growing smart product line.





SM-DIMSW



Model	Size	Dimmer	Scheduling	Sunrise & Sunset setting	Alexa & Google Assistant compatible	Voltage
SM-DIMSW	4 1/2"	√	√	√	√	120 V

SM-DIMSW

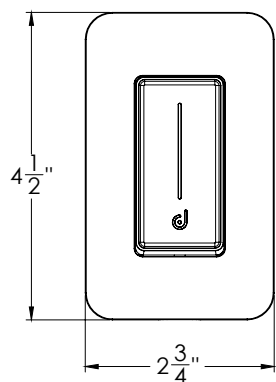

Specifications

Indoor use only
Control from the wall switch or with the Dals Connect app
LED brightness indicator
Touch-sensitive slide dimmer
Works with all "non-smart" standard lights
Dimming type: TRIAC Edge cut
Inductive load (LED-CFL): 250W max.
Resistive load (incan.): 430W max.
Standby power: 1W
5-year warranty

Finish

☐ **WH** White

Note

Does not work with Dals smart lights.
Requires a neutral wire. Works in a single-pole setup only. Secured 2.4 GHz wireless network required.

Download the Dals Connect app

Wi-Fi - no hub needed
Create groups
Set schedules
Remote access
Compatible with Google Assistant and Amazon Alexa



INDEX

2000-EXT20FT.....	81
2003	72
2004	72
2006	72
4000-E24	106
4000-E60	106
4000HRNS-24	106
4001-CC.....	91
4005-CC	92
K4005-CC.....	92
5000-EXT8FT.....	81
5000-EXT20FT.....	81
5003-CC	70
5004-CC	70
5005-CC	70
5006-CC	70
5004SQ-CC.....	70
6000-ACCE06.....	111
6000-ACCE24.....	111
6000-ACCE60.....	111
6000-ACCLR.....	111
6000-ACCPC.....	111
6000-JB.....	110
6000-JB.....	111
6001-CC.....	98
6001-E24.....	110
6001-E60.....	110
6001-PC.....	110
6009C.....	99
6012CC	99
6024CC	99
6036CC.....	99
6048CC.....	99
9000-ACCE24.....	111
9000-ACCE72.....	111
9009CC	102
9012CC	102
9018CC	102
9024CC	102
9030CC.....	102

B

BRPD18-CC.....	136
BRPD40-CC	136
BRV24-CC.....	136
BRV36-CC.....	136
BT06DIM-IC.....	104
BT12DIM-IC	104
BT24DIM-IC.....	104
BT36DIM.....	104
BT48DIM.....	104

C

CAPD72-CC.....	122
CAPD-ACCLL	242
CAPD-ACCLS.....	242
CCFM-CC	170
CFG13-CC	178

CFH12-CC	176
CFLED6-CC	182
CFLED10-CC	182
CFLED14-CC	182
CFLED18-CC	182
CFLED24-CC	182
CFLED5Q6-CC	182
CFLED5Q10-CC	182
CFLED5Q14-CC	182
CFPD20-CC.....	154
COBTB-EXT60	107
COBTP3M	88
COBTP5M	88
COBTP-REEL	88
COBTP24V-K10FT-CC	96
COBTP24V-K20FT-CC	96
COBTP24V-R50FT-CC	96
COBTP24V-R100FT-CC	96
COBTP24V-ACCL	109
COBTP24V-ACCL	109
COBTP24V-CC36	109
COBTP24V-ETR30	109
COBTP24V-ETR60	109
COBTP24V-EXT24	109
COBTP24V-EXT60	109
COBTP24V-EXT120	109
COBTP24V-SWT	109
COBTP-ALXT-BK	107
COBTP-ALXT-L5M-BK	107
COBTP-ALXT-L5M-WH	107
COBTP-ALXT-WH	107
COBTP-CC06	107
COBTP-EXT02	107
COBTP-EXT24	107
CYL05-CC	168
CYL06-CC-V.....	168
CYL05-TRIM-AZ	242
CYL05-TRIM-BK	242
CYL05-TRIM-GD	242
CYL05-TRIM-WH	242
CYL06-TRIM-AZ	242
CYL06-TRIM-BK	242
CYL06-TRIM-GD	242
CYL06-TRIM-WH	242

D

DCP-45HP20	284
DCP-ACC-MB	297
DCP-ACC-MS06.....	297
DCP-ACC-MS12.....	297
DCP-BLBA21	326
DCP-BLBBR30.....	328
DCP-BRK12	288
DCP-CGWS	318
DCP-CPL24.....	280
DCP-DDP4	310
DCP-DDP6	310
DCP-FGM4	306

DCP-FLD30.....	286
DCP-GBR35	308
DCP-HUB	304
DCP-LNPD48.....	316
DCP-LNR24	314
DCP-LNR48	314
DCP-LWS19	320
DCP-NFTAP5M	290
DCP-PNL4	312
DCP-PNL6	312
DCP-PTR36	297
DCP-RK10.....	294
DCP-RK18.....	294
DCP-RMCT.....	330
DCP-SPT6.....	278
DCP-SPTACCLENS	297
DCP-SPTTEXT14	297
DCP-STG48	292
DCP-STGACCLB	297
DCP-STGACPCB	297
DCP-STK20	282
DCP-STK50	282
DCP-TAPXXFT	322
DCP-TR60	276
DCP-TR200.....	276
DCP-TR300.....	276
DD1260	95
DDP4-CC.....	40
DDP6-CC.....	40
DDP4-TRIM-BK.....	81
DDP6-TRIM-BK.....	81
DR2412DIM.....	104
DR2424DIM	104
DR2448DIM	104
DR2460DIM.....	104
DR2496DIM.....	104
DRR2-CC.....	38
DRR4-CC.....	38
DRR6-CC.....	38
DRR4-TRIM-BK	81
DRR4-TRIM-SBA	81
DRR6-TRIM-BK.....	81
DRR6-TRIM-SBA	81
DSWC05-CC.....	222
DSWC07-CC-V	222

F

FDB-CC.....	146
FGM4-3K	60
FGM2-CC	60
FGM3-CC	60
FGM4-CC	60
FGM6-CC	60
FGM4SQ-CC.....	60
FGM6SQ-CC.....	60
FGM4-CC-DUO.....	60
FGM4-CC-TRIO	60
FMM09-CC.....	186

FMM12-CC	186
FMP05-CC-CR	188
FMP05-CC	188
FMP05M-CC	188
FMP09-CC	188
FMP12-CC.....	188
FMP09-CC-CR	188
FMP12-CC-CR.....	188
FMT18-CC.....	172
FPD60-CC.....	146
FPD-CC.....	146
FPDC3-CC.....	146
FUZ11-CC	174

G

GBR35-CC.....	56
GBR04-CC	56
GBR06-CC	56
GBR35-DW.....	56
GBR04-DW	56
GBR06-DW	56
GBR35SQ-CC	56
GBR35-CC-DUO.....	56
GBR35-CC-TRIO	56
GMB2-CC	64
GMB4-CC	64
GL-CFG13-CC	242
GMB2-GOOF	80
GNP4-CC	66
GNP6-CC	66
GNP-CC-EXT8FT	81
GNP-CC-EXT20FT	81
GRD2-CC.....	256
GSP3-CC.....	54
GSP-CC-EXT8FT	81
GSP-CC-EXT20FT	81

H

HLF09.....	100
HLF12	100
HLF18	100
HLF24.....	100
HLF30.....	100
HPD4-CC	48
HPD6-CC	48
HPD8-CC	48

I

IND4-DW.....	42
IND6-DW.....	42
IRPD-CC.....	120

K

K4005-CC.....	92
---------------	----

L

LAN-ACC-MS	296
LAN-ACC-PS	296

LCBL-50-14	296
LCBL-50-14	297
LCBL-50-16	296
LCBL-50-16	297
LCBL-100-12	296
LCBL-100-12	297
LCBL-100-14	296
LCBL-100-14	297
LCBL-100-16	296
LCBL-100-16	297
LCBL-200-12	296
LCBL-200-12	297
LEDDOWNACC-GOOF3	80
LEDDOWNACC-GOOF4	80
LEDDOWNACC-GOOF6	80
LEDDOWNG3-CC	64
LEDHRNS-6	106
LEDPATH004D	268
LEDPNLRTF56-CC	76
LEDSDM1	93
LEDSDP18	94
LEDSTEP002D-CC	234
LEDSTEP004D-CC	236
LEDSTEP005D-CC	238
LEDVAN001-CC-18	200
LEDVAN001-CC-24	200
LEDVAN002-CC-24	202
LEDVAN002-CC-36	202
LEDVAN003-CC-24	204
LEDVAN003-CC-32	204
LEDWALL001D-CC	230
LEDWALL-A	216
LEDWALL-B	218
LEDWALL-E	220
LEDWALL-G-CC	224
LEDWALL-H	226
LHS07-CC	264
LNACC-L16FT	242
LNFM48-CC	124
LNP48-CC	124
LNP48-CC	124
LNP48-CC	124
LNR24-CC	50
LNR48-CC	50
LPP20-CC	260
LRB20-CC	262
LRB30-CC	262
LSP3-ACCLN	296
LSP3-CCL	254
LSP4-CCL	254
LSP4-ACCLN	296
LSP-EXT04	296
LSP-WM	296
LSQP-ACC-PS	296
LSQP-CC	258
LSS10-CC	252
LSTP07-CC	240
LSTP12-CC	232
LTRP-60	266

LTR-300	266
LWJ08-CC	214
LWJ16-CC	214
LWJ24-CC	214

M

MFD03-CC	52
MSL1-CC	44
MSL2-CC	44
MSL4-CC	44
MSL5-CC	44
MSL10-CC	44
MSL5G-CC	44
MSL10G-CC	44
MSLPD48-CC	126
MSLWALL-CC	126

N

NAPF20-CC	118
NAPF20-CC	118

P

PDC18-CC	164
PDLED120-24	166
PDLED120-36	166
PDLED120-48	166
PDLED120-60	166
PDLED120-5	166
PDLED120-5SQ	166
PDLED120-8	166
PDLED120-8SQ	166
PDR14-CC	150

R

RC-03-CC	28
RC-04-CC	28
RC-06-CC	28
REC-3K-EXT8FT	81
REC-3K-EXT20FT	81
REC-CC-EXT8FT	81
REC-CC-EXT20FT	81
REC-GOOF2	80
REC-PT4-GD	81
REC-TRIM4-BK	81
REC-TRIM4-GD	81
REC-TRIM4-SN	81
REC-TRIM6-BK	81
REC-TRIM6-GD	81
REC-TRIM6-SN	81
RFP-23	78
RFP-35	78
RFP-46	78
RFP-58	78
RFP-DUO	80
RFP-GMB2	78
RFP-LNR24	80
RFP-LNR48	80
RFP-MSL1	79

RFP-MSL2	79
RFP-MSL4	79
RFP-MSL5	79
RFP-MSL5G	79
RFP-MSL10	79
RFP-MSL10G	79
RFP-RC06	78
RFP-TRIO	80
RFP-UNI	78
RGM2-CC	32
RGM4-CC	32
RGM6-CC	32
RGPD24-CC	148
RGR1-CC	34
RGR2-CC	34
RGR4-CC	34
RGR6-CC	34
RGR2-CC	34
RGR4-HP-CC	34
RGR4-CC	34
RGR6SQ-CC	34
RRPD2-CC	138
RRPD5-CC	138
RTJB4-3K	74
RTJB3-CC	74
RTJB4-CC	74
RTJB4-ACC	81
RTJB4-TRIM-BK	81
RTL-3C	250
RWS24-CC	210
RWS48-CC	210
RWS60-CC	210

S

SLPD60-CC	132
SM-DIMSW	332
SM-STTL20	324
SM-STFL50	324
SPD48-CC	128
SPD72-CC	128
SPN4-CC	68
SPN6-CC	68
SPR20-CC	140
SPR34-CC	140
SQS06-NUM-BK	242
SQS06-CC	228
SQS10-CC	228
SQS15-CC	228
SQS10-NUM-BK	242
SQS15-NUM-BK	242
SQSTP-CC	228
SSFM20-CC	158
SSPD32-CC	158
STK21-CC	160
STK37-CC	160
STRFL-3K	160
STRFM-3K	160
STRPD-3K	160

SWIVLED12-CC	90
SWIVLED-CC10-OUTPUT108	108
SWIVLEDACC-45VCLIP	108
SWIVLEDCC-EXT10	108
SWIVLEDCC-EXT36	108
SWIVLEDCC-EXT60	108
SWS24-CC	208
SWS36-CC	208
SWS48-CC	208
SWS60-CC	208

T

TLFM12-CC	180
TLFM21-CC	180
TRFM22-CC	152
TRPD34-CC	152
TWPD-CC	144
TWPS-3K	142

V

VAL24-CC	192
VAL36-CC	192
VA032-CC	190
VA024-CC	190
VCC24-CC	194
VCC36-CC	194
VDL40-CC	196
VLG24-CC	206
VLG36-CC	206
VSW24-CC	198
VSW36-CC	198

W

W1PD48-CC	134
W3FM-CC	134
W3PD36-CC	134

**Canada**

80, blvd. de la Seigneurie, East
Blainville, Quebec J7C 4N1
450 430 1818

U.S.A

4383, NW 124th Ave.,
Coral Springs, Florida 33065

Customer service

877 430 1818

For information regarding distributors
and points of sale please visit our website
dals.com or email: info@dals.com



dals.com



LIGHTING DESIGN GUIDE



2025



dals